



hansgrohe

Product news catalogue 2023

[hansgrohe.com](https://www.hansgrohe.com)

The prices stated are non-binding net price recommendations without the locally applicable VAT. This must be incorporated into calculations when quoting for a non-binding price recommendation for consumers.

Errors and omissions excepted.

Upon publication of this price list, all previously published price lists are no longer valid.

Figures given for dimensional drawings are in mm.

When installing the products, please follow the instructions in the installation manual.

All products are subject to availability. The availability may be temporarily impacted by material shortages, interruptions in the supply chain or other force majeure events.

Please contact us for further details.

The following general terms and conditions apply:

<https://www.hansgrohe.com/terms-of-conditions>

Product news catalogue 2023

Hansgrohe contact

Hansgrohe Headquarters



The Hansgrohe Master Service - Headquarters

Service hours:

Monday-Thursday: 8:00 am-4:00 pm

Friday: 8:00 am-3:00 pm

Phone: +49 7836 51-1282

Fax: +49 7836 51-1440

info@hansgrohe.com

You will also find technical information at

pro.hansgrohe-int.com



Global Projects Services - Headquarters

gpservices@hansgrohe.com

You will also find tender texts and planning details at

pro.hansgrohe-int.com/planning-data



Hansgrohe Aquademie - Headquarters

Monday-Friday: 7:30 am-7:00 pm

Saturday-Sunday: 10:00 am-4:00 pm

Hansgrohe SE

Hansgrohe Aquademie

Austr. 9

77761 Schiltach/Germany

Phone: +49 7836 51-3272

Fax: +49 7836 51-1505

The Aquademie is our adventure centre on all aspects of water.

pro.hansgrohe-int.com/aquademie

Bath

19	iBox universal 2
25	ShowerSelect Comfort
57	DuoTurn
71	Tecturis
101	Rebris
121	Logis
131	Pulsify
149	Planet Edition
155	Rainfinity
163	Designflex
165	RainButton
175	RainDrain & XtraStoris

Kitchen

187	Aqittura M91
193	Zesis M33

Showers, Thermostats & Mixers

Technologies



Adjustable shower head
The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



AirPower
Mixes air into the water. For a soft, less splashing water jet and full, light drops.



Comfort Zone
For requirements at any height - so the mixer fits perfectly into the desired washbasin situation.



Cool Contact
Thermostatic mixer with innovative cooling technology to prevent scalding and stop it from feeling uncomfortable to touch.



CoolStart
Environmentally friendly mixer that conserves valuable resources, reduces CO₂ emissions and cuts costs.



EasyClick
Hooks, baskets & co. can be simply attached to the wall rod and removed at any time.



Easy Installation
Quick and safe installation - several features ensure easy installation.



EcoSmart
Shower that uses up to 40% less water than a conventional model, also reducing energy costs.



Eco Smart+
This economical shower consumes up to 60% less water than conventional models. This also reduces energy costs.



EcoSmart
Mixer that consumes only 5 l/min and thus reduces water and energy costs. Good for the environment and the wallet.



Eco Smart+
Climate-protecting fitting that consumes only 4 l/min at 3 bar. Less water - less energy consumption.



Fast Drain
The shower's quick emptying function reduces the dripping time after showering.



Glue or Screw Fix
The accessory can be affixed using the glue that comes with the product - or it can be screwed on.



PushSlider
The height of the hand shower can be singlehandedly and smoothly shifted at the touch of a button.



Quick Clean
Limescale deposits and dirt can simply be rubbed off with a finger. For less cleaning effort.



Rotatable Bath Spout
The bath filler can be swivelled under the thermostatic mixer when not in use. Nice and tidy.



Safety Stop
Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.




Select
A playful way to control the water flow, shower or spray type at the simple touch of a button.



Water Damage Protection
The high-quality installation set has a pre-assembled sealing fleece and is 100% waterproof.



Water Flow Control
Actively regulate water consumption - the amount of water can be adjusted using the control dial.



XXL Performance
Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.

Spray modes



Intense Powder Rain
Intense spray consisting of thousands of micro-fine droplets. Thorough, soothing and low-splash.



Intense Rain
Powerful, stimulating water sprays that wash away tiredness and leave people feeling fighting fit.



Massage
Invigorating, concentrated spray for the home spa that allows the day's stresses to simply drain off.



Mono
Targeted spray that gently relaxes for soothing wellness moments.



Powder Rain
Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.


Finishes



Chrome



Matt Black



Matt White



Brushed Black Chrome




Brushed Bronze



Brushed Nickel



Polished Gold Optic



Sand (recycled)

Shower drains & Wall niches

Technologies



The shower drain is installed flush and level with the surrounding tiles for zero trip hazards.



Odor sealing via a flexible membrane combines high drainage capacity (up to 60 l/min) with minimum cleaning effort.



The odour trap itself can be removed for cleaning, even once the drain has been installed.



Practical and reliable shower drainage solution that can be installed anywhere in the shower area.



Easy-to-clean shower drain channel: Simply take off the cover using the tool that comes with the product to remove residue.



The high-quality installation set has a pre-assembled sealing fleece and is 100% waterproof.

Finishes




Concretegrey



Brushed Stainless Steel



Matt Black



Matt White

Kitchen

Technologies



Mixes air into the water. For a soft, less splashing water jet and full, light drops.



Ensures maximum freedom of movement at the sink, both in height and in the lateral swivel range.



The app provides important information about the kitchen mixer. It informs you about fill levels and more.



The low-pressure technology enables use from as little as 0.2 bar. Suitable for boilers/heat storage tanks.



This allows drinking vessels to be filled individually and precisely. The water flow stops automatically.



A pull-out shower or spout greatly extends the radius of action at the sink.




Filtered or mineralised water comes out of this user-friendly kitchen mixer at the touch of a button.



Limescale deposits and dirt can simply be rubbed off with a finger. For less cleaning effort.



Smooth and protected guidance of the hose. The pull-out shower can be extended up to 76 cm.



One press of a button is all it takes to regulate the flow of water at the sink.



At the touch of a button, treated water comes out of the mixer, either still, medium or sparkling.



Separate lines for treated and untreated water provide safety when tapping.

Spray modes



Crystal-clear spray for the sink with no air mixed in, perfect for quickly filling vessels.



Full spray enriched with air that feels lovely and helps with all sink-based routines.



Resource-conserving and efficient kitchen spray that can also be used to quickly rinse food.

Finishes



Chrome



Matt Black



Stainless Steel Finish

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page	brand	Code no.	EAN	page
01				HG	15384990	4059625489062	161
HG	01000180	4059625350867	176	HG	15553000	4059625464878	46
HG	01001180	4059625350850	176	HG	15553140	4059625464854	46
HG	01002180	4059625350836	176	HG	15553340	4059625464830	46
HG	01500180	4059625316900	20	HG	15553670	4059625465165	46
HG	01600180	4059625284186	169	HG	15553700	4059625465141	46
HG	01800180	4011097347240	106	HG	15554000	4059625465127	48
HG	01810180	4011097606866	106	HG	15554140	4059625465097	48
10				HG	15554340	4059625465073	48
AX	10452180	4011097254104	78	HG	15554670	4059625465059	48
13				HG	15554700	4059625465028	48
HG	13077000	4059625464960	60	HG	15556000	4059625464991	48
HG	13481180	4059625479285	82	HG	15556140	4059625464984	48
HG	13588000	4059625477359	20	HG	15556340	4059625464977	48
HG	13597000	4011097564739	106	HG	15556670	4059625465363	48
HG	13597670	4059625346815	106	HG	15556700	4059625465356	48
HG	13612000	4059625464632	22	HG	15558000	4059625465349	54
HG	13612140	4059625464625	22	HG	15558140	4059625465325	54
HG	13612340	4059625464618	22	HG	15558340	4059625465301	54
HG	13612670	4059625464601	22	HG	15558670	4059625465288	54
HG	13612700	4059625464595	22	HG	15558700	4059625465264	54
HG	13612990	4059625464588	22	HG	15559000	4059625465240	50
HG	13613000	4059625464571	23	HG	15559140	4059625465226	50
HG	13613140	4059625464564	23	HG	15559340	4059625465202	50
HG	13613340	4059625464557	23	HG	15559670	4059625465189	50
HG	13613670	4059625464540	23	HG	15559700	4059625465561	50
HG	13613700	4059625464533	23	HG	15562000	4059625465547	52
HG	13614000	4059625464519	24	HG	15562140	4059625465523	52
HG	13614140	4059625464502	24	HG	15562340	4059625465509	52
HG	13614340	4059625464496	24	HG	15562670	4059625465486	52
HG	13614670	4059625464489	24	HG	15562700	4059625465462	52
HG	13614700	4059625464472	24	HG	15571000	4059625465448	26
HG	13617000	4059625464458	22	HG	15571140	4059625465417	26
HG	13617140	4059625464441	22	HG	15571340	4059625465387	26
HG	13617340	4059625464434	22	HG	15571670	4059625465752	26
HG	13617670	4059625464427	22	HG	15571700	4059625465721	26
HG	13617700	4059625464410	22	HG	15572000	4059625465684	28
HG	13617990	4059625464403	22	HG	15572140	4059625465653	28
HG	13618000	4059625464397	23	HG	15572340	4059625465622	28
HG	13618140	4059625464380	23	HG	15572670	4059625465592	28
HG	13618340	4059625464373	23	HG	15572700	4059625465967	28
HG	13618670	4059625464366	23	HG	15573000	4059625465929	34
HG	13618700	4059625464359	23	HG	15573140	4059625465899	34
HG	13620180	4011097228747	109	HG	15573340	4059625465868	34
HG	13622180	4011097625386	77	HG	15573670	4059625465837	34
HG	13624000	4059625464335	24	HG	15573700	4059625465806	34
HG	13624140	4059625464328	24	HG	15574000	4059625466162	30
HG	13624340	4059625464311	24	HG	15574140	4059625466131	30
HG	13624670	4059625464304	24	HG	15574340	4059625466100	30
HG	13624700	4059625464298	24	HG	15574670	4059625466070	30
HG	13628000	4059625464274	22	HG	15574700	4059625466049	30
HG	13631000	4059625464267	24	HG	15575000	4059625466001	32
HG	13632000	4059625464250	20	HG	15575140	4059625465974	32
15				HG	15575340	4059625466346	32
HG	15381140	4059625489130	160	HG	15575670	4059625466315	32
HG	15381340	4059625489123	160	HG	15575700	4059625466285	32
HG	15381670	4059625489116	160	HG	15578000	4059625466247	28
HG	15381990	4059625489109	160	HG	15578140	4059625466230	28
HG	15384140	4059625489093	161	HG	15578340	4059625466223	28
HG	15384340	4059625489086	161	HG	15578670	4059625466216	28
HG	15384670	4059625489079	161	HG	15578700	4059625466209	28

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page	brand	Code no.	EAN	page
HG	15581000	4059625466193	36	HG	24321140	4059625418727	132
HG	15581140	4059625466179	36	HG	24321670	4059625414491	132
HG	15581340	4059625466766	36	HG	24321700	4059625414972	132
HG	15581670	4059625466759	36	HG	24330000	4059625411094	134
HG	15581700	4059625466735	36	HG	24330140	4059625467831	134
HG	15583000	4059625466711	38	HG	24330670	4059625411087	134
HG	15583140	4059625466698	38	HG	24330700	4059625411070	134
HG	15583340	4059625466681	38	HG	24331000	4059625411063	134
HG	15583670	4059625466674	38	HG	24331140	4059625467824	134
HG	15583700	4059625466650	38	HG	24331670	4059625411025	134
HG	15586000	4059625466636	38	HG	24331700	4059625410981	134
HG	15586140	4059625466629	38	HG	24333000	4059625467800	134
HG	15586340	4059625466612	38	HG	24333140	4059625467794	134
HG	15586670	4059625466605	38	HG	24333670	4059625467787	134
HG	15586700	4059625466599	38	HG	24333700	4059625467770	134
HG	15587000	4059625466582	44	HG	24337000	4059625395264	134
HG	15587140	4059625466568	44	HG	24337140	4059625467763	134
HG	15587340	4059625466551	44	HG	24337670	4059625395271	134
HG	15587670	4059625466544	44	HG	24337700	4059625395288	134
HG	15587700	4059625466520	44	HG	24338000	4059625410790	134
HG	15588000	4059625466506	40	HG	24338140	4059625467749	134
HG	15588140	4059625466483	40	HG	24338670	4059625410769	134
HG	15588340	4059625466476	40	HG	24338700	4059625410738	134
HG	15588670	4059625466469	40	HG	24339000	4059625410707	134
HG	15588700	4059625466445	40	HG	24339140	4059625467725	134
HG	15589000	4059625466421	42	HG	24339670	4059625410677	134
HG	15589140	4059625466407	42	HG	24339700	4059625410646	134
HG	15589340	4059625466391	42	HG	24340140	4059625467718	147
HG	15589670	4059625466384	42	HG	24350000	4059625410615	135
HG	15589700	4059625467145	42	HG	24350670	4059625410608	135
HG	15855180	4059625482155	166	HG	24350700	4059625410592	135
HG	15857180	4059625482162	166	HG	24351000	4059625410585	135
24				HG	24351670	4059625410561	135
HG	24110140	4059625442647	142	HG	24351700	4059625410547	135
HG	24111140	4059625442654	142	HG	24357000	4059625459331	141
HG	24125000	4059625468043	139	HG	24357140	4059625459362	141
HG	24125140	4059625468012	139	HG	24357670	4059625459355	141
HG	24125670	4059625468005	139	HG	24357700	4059625459348	141
HG	24125700	4059625467978	139	HG	24360140	4059625467701	147
HG	24126000	4059625467947	139	HG	24370000	4059625445211	133
HG	24126140	4059625467923	139	HG	24370670	4059625445235	133
HG	24126670	4059625467916	139	HG	24370700	4059625445228	133
HG	24126700	4059625467893	139	HG	24371000	4059625445259	133
HG	24130140	4059625442661	143	HG	24371670	4059625445273	133
HG	24139140	4059625448298	143	HG	24371700	4059625445266	133
HG	24140140	4059625453377	143	HG	24372000	4059625460931	140
HG	24141140	4059625453384	143	HG	24372670	4059625460917	140
HG	24149140	4059625453391	143	HG	24372700	4059625460894	140
HG	24220140	4059625467879	146	HG	24373000	4059625460870	140
HG	24220670	4059625411193	146	HG	24373670	4059625460849	140
HG	24220700	4059625411186	146	HG	24373700	4059625460818	140
HG	24221140	4059625467862	146	HG	24380000	4059625444603	133
HG	24221670	4059625411179	146	HG	24380670	4059625444610	133
HG	24221700	4059625411148	146	HG	24380700	4059625445242	133
HG	24240140	4059625467855	145	HG	24381000	4059625445280	133
HG	24241140	4059625467848	145	HG	24381670	4059625445303	133
HG	24320000	4059625415375	132	HG	24381700	4059625445297	133
HG	24320140	4059625418710	132	HG	24382000	4059625460788	140
HG	24320670	4059625415368	132	HG	24382670	4059625460771	140
HG	24320700	4059625415351	132	HG	24382700	4059625460764	140
HG	24321000	4059625415344	132	HG	24383000	4059625460757	140

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page	brand	Code no.	EAN	page
HG	24383670	4059625460740	140	HG	25016340	4059625468333	167
HG	24383700	4059625460733	140	HG	25016670	4059625468326	167
HG	24400670	4059625489055	148	HG	25016700	4059625284247	167
HG	24400700	4059625489048	148	HG	25016990	4059625468319	167
HG	24401670	4059625489031	148	HG	25017000	4059625284230	166
HG	24401700	4059625489024	148	HG	25017140	4059625468302	166
HG	24402000	4059625460726	141	HG	25017340	4059625468296	166
HG	24402140	4059625460702	141	HG	25017670	4059625468289	166
HG	24402670	4059625460696	141	HG	25017700	4059625284223	166
HG	24402700	4059625460672	141	HG	25017990	4059625468272	166
HG	24403000	4059625445136	138	HG	25018000	4059625284216	166
HG	24403140	4059625445167	138	HG	25018140	4059625468265	166
HG	24403670	4059625445150	138	HG	25018340	4059625468258	166
HG	24403700	4059625445143	138	HG	25018670	4059625468241	166
HG	24404000	4059625445174	138	HG	25018700	4059625284209	166
HG	24404140	4059625445204	138	HG	25018990	4059625468234	166
HG	24404670	4059625445198	138	HG	25020180	4059625284193	166
HG	24404700	4059625445181	138	HG	25100000	4059625350898	167
HG	24405000	4059625460658	141	26			
HG	24405140	4059625460634	141	HG	26077210	4059625478981	150
HG	24405670	4059625460627	141	HG	26243140	4059625442982	157
HG	24405700	4059625460603	141	HG	26243340	4059625442975	157
25				HG	26243670	4059625442968	157
HG	25010000	4059625284384	166	HG	26243990	4059625454329	157
HG	25010140	4059625468586	166	HG	26843140	4059625442951	159
HG	25010340	4059625468579	166	HG	26843340	4059625442944	159
HG	25010670	4059625468562	166	HG	26843670	4059625442937	159
HG	25010700	4059625284377	166	HG	26843990	4059625454336	159
HG	25010990	4059625468555	166	HG	26844140	4059625442920	160
HG	25011000	4059625284360	167	HG	26844340	4059625442913	160
HG	25011140	4059625468548	167	HG	26844670	4059625442906	160
HG	25011340	4059625468531	167	HG	26844990	4059625452240	160
HG	25011670	4059625468524	167	HG	26853000	4059625468616	158
HG	25011700	4059625284353	167	HG	26853670	4059625468609	158
HG	25011990	4059625468517	167	HG	26853700	4059625468593	158
HG	25012000	4059625284346	166	HG	26858140	4059625442692	159
HG	25012140	4059625468500	166	HG	26858340	4059625442685	159
HG	25012340	4059625468494	166	HG	26858670	4059625442678	159
HG	25012670	4059625468487	166	HG	26858990	4059625452295	159
HG	25012700	4059625284339	166	27			
HG	25012990	4059625468470	166	HG	27389140	4059625234471	143
HG	25013000	4059625284322	167	HG	27393140	4059625234518	143
HG	25013140	4059625468463	167	28			
HG	25013340	4059625468456	167	HG	28220000	4059625462850	164
HG	25013670	4059625468449	167	HG	28220140	4059625462843	164
HG	25013700	4059625284315	167	HG	28220340	4059625462836	164
HG	25013990	4059625468432	167	HG	28220670	4059625462829	164
HG	25014000	4059625284308	167	HG	28220700	4059625462812	164
HG	25014140	4059625468425	167	HG	28221210	4059625462805	153
HG	25014340	4059625468418	167	HG	28230000	4059625462799	164
HG	25014670	4059625468401	167	HG	28230140	4059625462782	164
HG	25014700	4059625284292	167	HG	28230340	4059625462775	164
HG	25014990	4059625468395	167	HG	28230670	4059625462768	164
HG	25015000	4059625284285	167	HG	28230700	4059625462751	164
HG	25015140	4059625468388	167	HG	28230820	4059625462744	164
HG	25015340	4059625468371	167	HG	28230990	4059625462737	164
HG	25015670	4059625468364	167	HG	28250210	4059625462720	153
HG	25015700	4059625284278	167	HG	28260000	4059625462713	164
HG	25015990	4059625468357	167	HG	28260140	4059625462690	164
HG	25016000	4059625284254	167	HG	28260340	4059625462676	164
HG	25016140	4059625468340	167	HG	28260670	4059625462652	164

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page	brand	Code no.	EAN	page
HG	28260700	4059625462638	164	HG	56171000	4059625429945	179
HG	28260820	4059625462614	164	HG	56172800	4059625429938	178
HG	28260990	4059625462607	164	HG	56173000	4059625429921	179
HG	28742000	4059625489017	158	HG	56174800	4059625429914	180
HG	28742670	4059625489000	158	HG	56175000	4059625429907	181
HG	28742700	4059625488997	158	HG	56176800	4059625429891	180
HG	28743000	4059625488980	156	HG	56177000	4059625429884	181
HG	28743140	4059625488973	156	HG	56178800	4059625429877	180
HG	28743340	4059625488966	156	HG	56179000	4059625429860	181
HG	28743670	4059625488959	156	HG	56180800	4059625429853	180
HG	28743700	4059625488942	156	HG	56181000	4059625429846	181
HG	28743990	4059625488935	156	HG	56182800	4059625429839	180
HG	28744000	4059625488928	156	HG	56183000	4059625429822	181
HG	28744140	4059625488911	156	HG	56184800	4059625429815	180
HG	28744340	4059625488904	156	HG	56185000	4059625429808	181
HG	28744670	4059625488898	156	HG	56186800	4059625429792	177
HG	28744700	4059625488881	156	HG	56187800	4059625429785	177
HG	28744990	4059625488874	156	HG	56188800	4059625429778	177
HG	28745000	4059625488867	156	HG	56189800	4059625429761	177
HG	28745140	4059625488850	156	HG	56190800	4059625429754	177
HG	28745340	4059625488843	156	HG	56196800	4059625429747	176
HG	28745670	4059625488836	156	HG	56197800	4059625429730	176
HG	28745700	4059625488829	156	HG	56198800	4059625429723	176
HG	28745990	4059625488812	156	HG	56199800	4059625429716	176
HG	28746000	4059625488805	156	HG	56200800	4059625429709	176
HG	28746140	4059625487990	156	HG	56201800	4059625429693	176
HG	28746340	4059625487983	156	HG	56246800	4059625429686	182
HG	28746670	4059625487976	156	HG	56247670	4059625429679	183
HG	28746700	4059625487969	156	HG	56247800	4059625429662	183
HG	28746990	4059625487952	156	HG	56248800	4059625429655	182
HG	28911210	4059625479407	150	HG	56249670	4059625429648	183
HG	28912210	4059625479414	150	HG	56249800	4059625429631	183
HG	28913210	4059625479421	151	HG	56250670	4059625429624	181
HG	28915210	4059625479445	152	HG	56250800	4059625429617	181
HG	28916210	4059625479452	152	HG	56251670	4059625429600	182
HG	28917210	4059625479469	151	HG	56251800	4059625429594	182
HG	28918210	4059625479476	152				
31				71			
HG	31741180	4011097477237	106	HG	71070670	4059625460511	122
56				HG	71071670	4059625460535	122
HG	56062670	4059625430156	185	HG	71072670	4059625460559	122
HG	56062700	4059625430149	185	HG	71073670	4059625460573	122
HG	56062800	4059625430132	185	HG	71077670	4059625460597	122
HG	56065670	4059625430125	184	HG	71090670	4059625461419	122
HG	56065700	4059625430118	184	HG	71091670	4059625461433	122
HG	56065800	4059625430101	184	HG	71100670	4059625461457	122
HG	56092380	4059625445921	184	HG	71101670	4059625461471	122
HG	56092670	4059625430095	184	HG	71102670	4059625461501	122
HG	56092700	4059625430088	184	HG	71103670	4059625461525	122
HG	56093380	4059625445938	184	HG	71107670	4059625461549	122
HG	56093670	4059625430064	184	HG	71120670	4059625461563	125
HG	56093700	4059625430057	184	HG	71130670	4059625462034	123
HG	56162800	4059625430033	178	HG	71131670	4059625462058	123
HG	56163000	4059625430026	179	HG	71170670	4059625461587	122
HG	56164800	4059625430019	178	HG	71171670	4059625461600	122
HG	56165000	4059625430002	179	HG	71200670	4059625461624	125
HG	56166800	4059625429990	178	HG	71201670	4059625462072	126
HG	56167000	4059625429983	179	HG	71204670	4059625461648	125
HG	56168800	4059625429976	178	HG	71220670	4059625470329	123
HG	56169000	4059625429969	179	HG	71251670	4059625462096	124
HG	56170800	4059625429952	178	HG	71252670	4059625462119	124
				HG	71253670	4059625462133	124

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page	brand	Code no.	EAN	page
HG	71254670	4059625462157	124	HG	72506670	4059625412725	104
HG	71255670	4059625462171	124	HG	72510000	4059625402375	111
HG	71256670	4059625470299	124	HG	72513000	4059625402337	111
HG	71257670	4059625462195	124	HG	72513670	4059625402320	111
HG	71258670	4059625462218	124	HG	72514000	4059625412695	111
HG	71315670	4059625461662	128	HG	72517000	4059625402290	111
HG	71400670	4059625461686	126	HG	72517670	4059625402283	111
HG	71401670	4059625461709	126	HG	72519000	4059625402276	111
HG	71405670	4059625470237	127	HG	72519670	4059625402269	111
HG	71407670	4059625470213	127	HG	72520000	4059625412657	111
HG	71410670	4059625470206	127	HG	72520670	4059625412640	111
HG	71600670	4059625461723	128	HG	72527000	4059625437919	111
HG	71601670	4059625461747	128	HG	72527670	4059625402207	111
HG	71605670	4059625470183	129	HG	72528000	4059625412619	113
72				HG	72528670	4059625412602	113
HG	72210000	4059625402412	114	HG	72530000	4059625412596	113
HG	72210670	4059625402405	114	HG	72536000	4059625401699	112
HG	72211000	4059625402146	105	HG	72536670	4059625401682	112
HG	72211670	4059625402139	105	HG	72550000	4059625402009	102
HG	72212000	4059625413074	114	HG	72551000	4059625412565	102
HG	72212670	4059625413067	114	HG	72551670	4059625412558	102
HG	72213000	4059625413050	105	HG	72553000	4059625401989	102
HG	72213670	4059625413043	105	HG	72553670	4059625401972	102
HG	72215000	4059625413036	112	HG	72554000	4059625412527	102
HG	72215670	4059625419595	112	HG	72554670	4059625412510	102
HG	72216000	4059625413029	103	HG	72557000	4059625401941	102
HG	72430000	4059625412978	117	HG	72557670	4059625401934	102
HG	72430670	4059625412961	117	HG	72559000	4059625401927	102
HG	72431000	4059625412954	107	HG	72559670	4059625401910	102
HG	72431670	4059625412947	107	HG	72560000	4059625412480	102
HG	72434000	4059625412916	118	HG	72560670	4059625412473	102
HG	72435000	4059625412909	108	HG	72568000	4059625412442	104
HG	72436000	4059625412893	117	HG	72568670	4059625412435	104
HG	72437000	4059625412886	107	HG	72576000	4059625401873	103
HG	72440000	4059625402122	115	HG	72576670	4059625401866	103
HG	72440670	4059625402115	115	HG	72580000	4059625418512	112
HG	72442000	4059625402108	115	HG	72580670	4059625418505	112
HG	72443000	4059625402092	115	HG	72581000	4059625418499	103
HG	72443670	4059625402085	115	HG	72581670	4059625418482	103
HG	72448000	4059625412862	117	HG	72582000	4059625418475	112
HG	72448670	4059625412855	117	HG	72583000	4059625418468	103
HG	72449000	4059625412848	116	HG	72584000	4059625418451	111
HG	72449670	4059625412831	116	HG	72584670	4059625418444	111
HG	72450000	4059625402078	105	HG	72585000	4059625418437	102
HG	72450670	4059625402061	105	HG	72585670	4059625418420	102
HG	72452000	4059625402054	105	HG	72586000	4059625418413	111
HG	72458000	4059625412817	107	HG	72586670	4059625418406	111
HG	72458670	4059625412800	107	HG	72587000	4059625418390	102
HG	72459000	4059625412794	106	HG	72587670	4059625418383	102
HG	72459670	4059625412787	106	HG	72588000	4059625418376	111
HG	72466000	4059625402047	116	HG	72588670	4059625418369	111
HG	72466670	4059625402030	116	HG	72589000	4059625418352	102
HG	72467000	4059625412770	116	HG	72589670	4059625418345	102
HG	72467670	4059625412763	116	HG	72590000	4059625418338	112
HG	72468000	4059625402023	106	HG	72590670	4059625418321	112
HG	72468670	4059625402016	106	HG	72591000	4059625418314	103
HG	72469000	4059625412756	106	HG	72591670	4059625418307	103
HG	72469670	4059625412749	106	HG	72640000	4059625401859	118
HG	72503000	4059625402399	113	HG	72640670	4059625401842	118
HG	72503670	4059625402382	113	HG	72642000	4059625401835	118
HG	72506000	4059625412732	104	HG	72643000	4059625401828	119

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page	brand	Code no.	EAN	page
HG	72643670	4059625401811	119	HG	73040670	4059625474228	86
HG	72649000	4059625412381	120	HG	73040700	4059625474211	86
HG	72649670	4059625412374	120	HG	73041000	4059625474204	86
HG	72650000	4059625401804	108	HG	73041140	4059625474198	86
HG	72650670	4059625401798	108	HG	73041670	4059625474181	86
HG	72652000	4059625401781	108	HG	73041700	4059625474174	86
HG	72658000	4059625412367	110	HG	73051000	4059625483312	91
HG	72658670	4059625412350	110	HG	73051140	4059625483305	91
HG	72659000	4059625412343	109	HG	73051670	4059625483299	91
HG	72659670	4059625412336	109	HG	73051700	4059625483282	91
HG	72667000	4059625401774	119	HG	73053000	4059625471067	87
HG	72667670	4059625401767	119	HG	73053140	4059625471050	87
HG	72668000	4059625401750	109	HG	73053670	4059625471043	87
HG	72668670	4059625401743	109	HG	73053700	4059625471036	87
73				HG	73060000	4059625474129	87
HG	73001000	4059625473658	89	HG	73060140	4059625474112	87
HG	73001140	4059625473641	89	HG	73060670	4059625474105	87
HG	73001670	4059625473634	89	HG	73060700	4059625474099	87
HG	73001700	4059625473627	89	HG	73070000	4059625474044	86
HG	73002000	4059625473610	89	HG	73070140	4059625474037	86
HG	73002140	4059625473597	89	HG	73070670	4059625474020	86
HG	73002670	4059625473580	89	HG	73070700	4059625474013	86
HG	73002700	4059625473566	89	HG	73072000	4059625474006	86
HG	73010000	4059625473504	89	HG	73072140	4059625473986	86
HG	73010140	4059625473498	89	HG	73072670	4059625473979	86
HG	73010670	4059625473481	89	HG	73072700	4059625474556	86
HG	73010700	4059625473474	89	HG	73200000	4059625474495	92
HG	73011000	4059625473467	89	HG	73200140	4059625474488	92
HG	73011140	4059625473450	89	HG	73200670	4059625474471	92
HG	73011670	4059625473443	89	HG	73200700	4059625474464	92
HG	73011700	4059625473436	89	HG	73201000	4059625471029	78
HG	73012000	4059625473429	89	HG	73201140	4059625474457	78
HG	73012140	4059625473412	89	HG	73201670	4059625472163	78
HG	73012670	4059625473405	89	HG	73201700	4059625472156	78
HG	73012700	4059625473399	89	HG	73210000	4059625474440	90
HG	73013000	4059625473382	90	HG	73210670	4059625474433	90
HG	73013140	4059625473375	90	HG	73211000	4059625471012	76
HG	73013670	4059625473368	90	HG	73211670	4059625472149	76
HG	73013700	4059625473955	90	HG	73301000	4059625471005	75
HG	73014000	4059625473948	89	HG	73301140	4059625474426	75
HG	73014140	4059625473924	89	HG	73301670	4059625472132	75
HG	73014670	4059625473917	89	HG	73301700	4059625472125	75
HG	73014700	4059625473894	89	HG	73302000	4059625470992	75
HG	73020000	4059625473832	86	HG	73302140	4059625474402	75
HG	73020140	4059625473825	86	HG	73302670	4059625472118	75
HG	73020670	4059625473818	86	HG	73302700	4059625472101	75
HG	73020700	4059625473801	86	HG	73310000	4059625470985	75
HG	73021000	4059625473795	86	HG	73310140	4059625474334	75
HG	73021140	4059625473771	86	HG	73310670	4059625472095	75
HG	73021670	4059625473764	86	HG	73310700	4059625472088	75
HG	73021700	4059625473740	86	HG	73311000	4059625470978	75
HG	73023000	4059625473726	86	HG	73311140	4059625474327	75
HG	73023140	4059625473719	86	HG	73311670	4059625472071	75
HG	73023670	4059625473702	86	HG	73311700	4059625472064	75
HG	73023700	4059625473696	86	HG	73312000	4059625470961	75
HG	73030000	4059625483435	88	HG	73312140	4059625474310	75
HG	73030140	4059625483428	88	HG	73312670	4059625472057	75
HG	73030670	4059625483411	88	HG	73312700	4059625472040	75
HG	73030700	4059625483404	88	HG	73313000	4059625470954	76
HG	73040000	4059625474242	86	HG	73313140	4059625474303	76
HG	73040140	4059625474235	86	HG	73313670	4059625472033	76

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page	brand	Code no.	EAN	page
HG	73313700	4059625472026	76	HG	73420000	4059625474952	93
HG	73314000	4059625470947	75	HG	73420140	4059625474945	93
HG	73314140	4059625474280	75	HG	73420670	4059625474938	93
HG	73314670	4059625472019	75	HG	73420700	4059625474921	93
HG	73314700	4059625472002	75	HG	73422000	4059625470565	79
HG	73320000	4059625470930	72	HG	73422140	4059625474914	79
HG	73320140	4059625474815	72	HG	73422670	4059625470558	79
HG	73320670	4059625471999	72	HG	73422700	4059625470541	79
HG	73320700	4059625471982	72	HG	73440000	4059625470534	78
HG	73321000	4059625474808	72	HG	73440140	4059625470527	78
HG	73321140	4059625474785	72	HG	73440670	4059625470510	78
HG	73321670	4059625474778	72	HG	73440700	4059625470503	78
HG	73321700	4059625474754	72	HG	73443000	4059625483176	96
HG	73323000	4059625470923	72	HG	73443140	4059625483169	96
HG	73323140	4059625474730	72	HG	73443670	4059625483152	96
HG	73323670	4059625471975	72	HG	73443700	4059625483145	96
HG	73323700	4059625471968	72	HG	73445000	4059625471913	92
HG	73330000	4059625470916	74	HG	73445140	4059625471906	92
HG	73330140	4059625470909	74	HG	73445670	4059625471791	92
HG	73330670	4059625470893	74	HG	73445700	4059625471784	92
HG	73330700	4059625470886	74	HG	73447000	4059625470480	82
HG	73340000	4059625470831	72	HG	73447140	4059625470473	82
HG	73340140	4059625474686	72	HG	73447670	4059625470466	82
HG	73340670	4059625471951	72	HG	73447700	4059625470459	82
HG	73340700	4059625471944	72	HG	73620000	4059625474907	97
HG	73341000	4059625470824	72	HG	73620140	4059625474891	97
HG	73341140	4059625474679	72	HG	73620670	4059625474884	97
HG	73341670	4059625471937	72	HG	73620700	4059625474877	97
HG	73341700	4059625471920	72	HG	73622000	4059625470404	83
HG	73350000	4059625470817	77	HG	73622140	4059625474860	83
HG	73350140	4059625470800	77	HG	73622670	4059625470398	83
HG	73350670	4059625470794	77	HG	73622700	4059625470381	83
HG	73350700	4059625470787	77	74			
HG	73351000	4059625470770	77	HG	74806000	4059625340202	195
HG	73351140	4059625470763	77	HG	74806670	4059625463444	195
HG	73351670	4059625470756	77	HG	74806800	4059625463451	195
HG	73351700	4059625470749	77	HG	74820000	4059625464786	194
HG	73353000	4059625470732	73	HG	74820670	4059625464779	194
HG	73353140	4059625470725	73	HG	74820800	4059625464762	194
HG	73353670	4059625470718	73	HG	74821000	4059625464755	194
HG	73353700	4059625470701	73	HG	74821670	4059625464748	194
HG	73360000	4059625474624	73	HG	74821800	4059625464731	194
HG	73360140	4059625474617	73	HG	74822000	4059625464724	194
HG	73360670	4059625474600	73	HG	74822670	4059625464717	194
HG	73360700	4059625474594	73	HG	74822800	4059625464700	194
HG	73370000	4059625475102	72	HG	74823000	4059625462898	194
HG	73370140	4059625475096	72	HG	74823670	4059625462881	194
HG	73370670	4059625475089	72	HG	74823800	4059625462874	194
HG	73370700	4059625475072	72	75			
HG	73372000	4059625475065	72	HG	75414000	4059625459737	64
HG	73372140	4059625475041	72	HG	75414140	4059625482940	64
HG	73372670	4059625475034	72	HG	75414670	4059625471593	64
HG	73372700	4059625475010	72	HG	75414700	4059625471579	64
HG	73410000	4059625470619	95	HG	75417000	4059625471555	60
HG	73410140	4059625483220	95	HG	75417140	4059625482933	60
HG	73410670	4059625483213	95	HG	75417670	4059625471524	60
HG	73410700	4059625483190	95	HG	75417700	4059625471500	60
HG	73411000	4059625470602	81	HG	75418000	4059625471470	68
HG	73411140	4059625470596	81	HG	75418140	4059625482926	68
HG	73411670	4059625470589	81	HG	75418670	4059625471432	68
HG	73411700	4059625470572	81	HG	75418700	4059625471401	68

Code Numbers and Trade Prices (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	75614000	4059625471289	62
HG	75614140	4059625482889	62
HG	75614670	4059625471272	62
HG	75614700	4059625471265	62
HG	75617000	4059625471258	58
HG	75617140	4059625482872	58
HG	75617670	4059625471241	58
HG	75617700	4059625471234	58
HG	75618000	4059625471227	66
HG	75618140	4059625482865	66
HG	75618670	4059625471197	66
HG	75618700	4059625471173	66
76			
HG	76800000	4059625391082	190
HG	76800670	4059625391105	190
HG	76800800	4059625391099	190
HG	76801000	4059625391112	190
HG	76801670	4059625391136	190
HG	76801800	4059625391129	190
HG	76802000	4059625391143	192
HG	76802670	4059625391167	192
HG	76802800	4059625391150	192
HG	76803000	4059625391174	190
HG	76803670	4059625391198	190
HG	76803800	4059625391181	190
HG	76804000	4059625391235	192
HG	76804670	4059625391259	192
HG	76804800	4059625391242	192
HG	76814000	4059625377734	188
HG	76815000	4059625377727	188
HG	76818000	4059625391419	191
HG	76826000	4059625391204	190
HG	76826670	4059625391228	190
HG	76826800	4059625391211	190
HG	76827000	4059625377710	188
HG	76828000	4059625377703	188
HG	76829000	4059625377390	188
HG	76830000	4059625377383	188
HG	76836000	4059625409855	188
HG	76836670	4059625409848	188
HG	76836800	4059625409831	188
HG	76837000	4059625409824	189
HG	76837670	4059625409817	189
HG	76837800	4059625409800	189
95			
HG	95626000	4011097666716	81
96			
AX	96441000	4011097432717	78
97			
HG	97846000	4011097745251	107




iBox universal 2

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

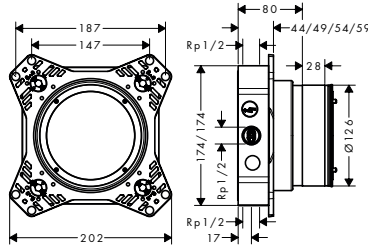

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW

Q3/2023


13632000

Adapter plate for iBox universal 2

Features

· is required when installing iBox universal compatible overhead showers, shower,

bath tub and thermostat finish sets for concealed installation in conjunction with the iBox universal 2



	available from	code no.
NEW	Q3/2023	13588000

Extension iBox universal 2 basic set 2,5 cm

Features

· extension for basic set

· is required if the basic set is installed too deep

· extension length: 25 mm




	available from	code no.
NEW	Q3/2023	13632000

ShowerSelect Comfort E Extension element 5 mm

Features

- for installation between tiles and finish set
- is required if the basic set is installed too flat
- for larger tile coverage
- suitable for all shower, bath tub and thermostat finish sets for concealed installation
- dimension: 170 x 170 mm
- extension length: 5 mm

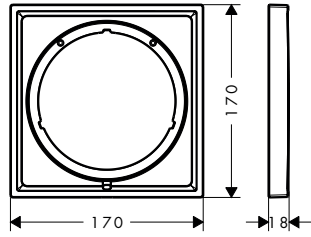


finish		available from	code no.
Chrome	NEW	Q3/2023	13612000
Brushed Bronze	NEW	Q3/2023	13612140
Brushed Black Chrome	NEW	Q3/2023	13612340
Matt Black	NEW	Q3/2023	13612670
Matt White	NEW	Q3/2023	13612700
Polished Gold Optic	NEW	Q3/2023	13612990

ShowerSelect Comfort E Extension element 22 mm

Features

- for installation between tiles and finish set
- is required if the basic set is installed too flat
- for larger tile coverage
- suitable for all shower, bath tub and thermostat finish sets for concealed installation
- dimension: 170 x 170 mm
- extension length: 22 mm

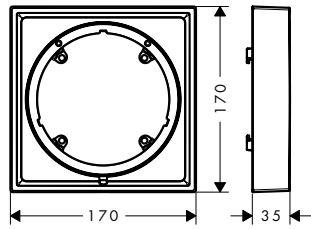


finish		available from	code no.
Chrome	NEW	Q3/2023	13617000
Brushed Bronze	NEW	Q3/2023	13617140
Brushed Black Chrome	NEW	Q3/2023	13617340
Matt Black	NEW	Q3/2023	13617670
Matt White	NEW	Q3/2023	13617700
Polished Gold Optic	NEW	Q3/2023	13617990

DuoTurn Q Adapter for ShowerSelect Comfort extension element

Features

- is required if the basic set is installed too flat




	available from	code no.
NEW	Q3/2023	13628000

ShowerSelect Comfort Q Extension element 5 mm

Features

- for installation between tiles and finish set
- is required if the basic set is installed too flat
- for larger tile coverage
- suitable for all shower, bath tub and thermostat finish sets for concealed installation
- dimension: 170 x 170 mm
- extension length: 5 mm

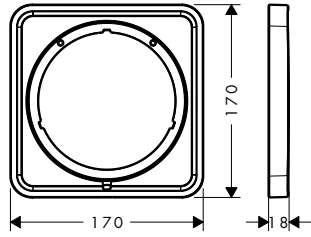


finish		available from	code no.
Chrome	NEW	Q3/2023	13613000
Brushed Bronze	NEW	Q3/2023	13613140
Brushed Black Chrome	NEW	Q3/2023	13613340
Matt Black	NEW	Q3/2023	13613670
Matt White	NEW	Q3/2023	13613700

ShowerSelect Comfort Q Extension element 22 mm

Features

- for installation between tiles and finish set
- is required if the basic set is installed too flat
- for larger tile coverage
- suitable for all shower, bath tub and thermostat finish sets for concealed installation
- dimension: 170 x 170 mm
- extension length: 22 mm

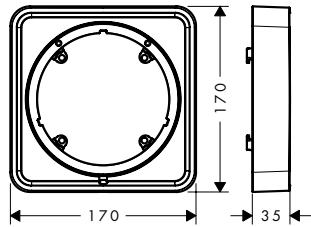


finish		available from	code no.
Chrome	NEW	Q3/2023	13618000
Brushed Bronze	NEW	Q3/2023	13618140
Brushed Black Chrome	NEW	Q3/2023	13618340
Matt Black	NEW	Q3/2023	13618670
Matt White	NEW	Q3/2023	13618700

DuoTurn Q Adapter for ShowerSelect Comfort extension element

Features

- is required if the basic set is installed too flat




	available from	code no.
NEW	Q3/2023	13628000

ShowerSelect Comfort S Extension element 5 mm

Features

- for installation between tiles and finish set
- is required if the basic set is installed too flat
- for larger tile coverage
- suitable for all shower, bath tub and thermostat finish sets for concealed installation
- diameter: 170 mm
- extension length: 5 mm

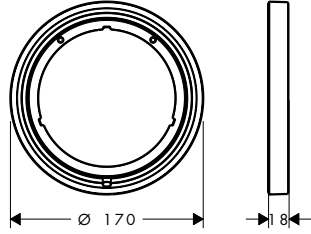


finish		available from	code no.
Chrome	NEW	Q3/2023	13614000
Brushed Bronze	NEW	Q3/2023	13614140
Brushed Black Chrome	NEW	Q3/2023	13614340
Matt Black	NEW	Q3/2023	13614670
Matt White	NEW	Q3/2023	13614700

ShowerSelect Comfort S Extension element 22 mm

Features

- for installation between tiles and finish set
- is required if the basic set is installed too flat
- for larger tile coverage
- suitable for all shower, bath tub and thermostat finish sets for concealed installation
- diameter: 170 mm
- extension length: 22 mm

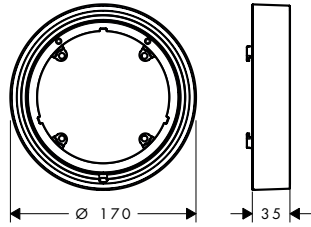


finish		available from	code no.
Chrome	NEW	Q3/2023	13624000
Brushed Bronze	NEW	Q3/2023	13624140
Brushed Black Chrome	NEW	Q3/2023	13624340
Matt Black	NEW	Q3/2023	13624670
Matt White	NEW	Q3/2023	13624700

DuoTurn S Adapter for ShowerSelect Comfort extension element

Features

- is required if the basic set is installed too flat



	available from	code no.
NEW	Q3/2023	13631000




ShowerSelect Comfort

ShowerSelect Comfort E Thermostat for concealed installation for 1 function

Features

- 1 function
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of one consumer with large Select-paddle
- material button: metal
- material handles: metal
- maximum flow rate at 3 bar: 26 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2
- thermostat is delivered with button On/Off

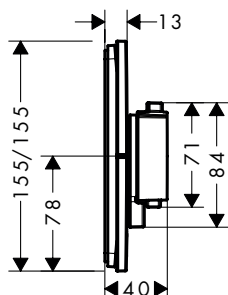

Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15571000
Brushed Bronze	NEW	Q3/2023	15571140
Brushed Black Chrome	NEW	Q3/2023	15571340
Matt Black	NEW	Q3/2023	15571670
Matt White	NEW	Q3/2023	15571700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort E Extension element 5 mm

finish

available from

code no.

Chrome	NEW	Q3/2023	13612000
Brushed Bronze	NEW	Q3/2023	13612140
Brushed Black Chrome	NEW	Q3/2023	13612340
Matt Black	NEW	Q3/2023	13612670
Matt White	NEW	Q3/2023	13612700



ShowerSelect Comfort E Extension element 22 mm

Chrome	NEW	Q3/2023	13617000
Brushed Bronze	NEW	Q3/2023	13617140
Brushed Black Chrome	NEW	Q3/2023	13617340
Matt Black	NEW	Q3/2023	13617670
Matt White	NEW	Q3/2023	13617700



Extension iBox universal 2 basic set 2,5 cm

NEW

available from

Q3/2023


code no.

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

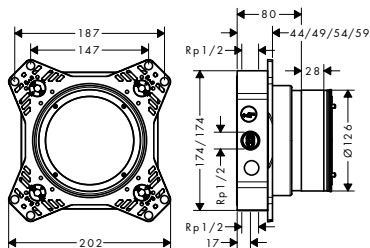

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort E Thermostats for concealed installation for 2 functions

Features of all variants

- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- material button: metal
- material handles: metal
- simultaneous use of several outlets
- maximum flow rate at 3 bar: 26 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2
- thermostat is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Sustainability



Technologies



Overview variants

security combination EN 1717	finish	available from	code no.
–	<ul style="list-style-type: none"> Chrome NEW Q3/2023 15572000 Brushed Bronze NEW Q3/2023 15572140 Brushed Black Chrome NEW Q3/2023 15572340 Matt Black NEW Q3/2023 15572670 Matt White NEW Q3/2023 15572700 		
■	<ul style="list-style-type: none"> Chrome NEW Q3/2023 15578000 Brushed Bronze NEW Q3/2023 15578140 Brushed Black Chrome NEW Q3/2023 15578340 Matt Black NEW Q3/2023 15578670 Matt White NEW Q3/2023 15578700 		

Required parts:

	available from	code no.
iBox universal 2 Basic set	NEW Q3/2023	01500180


Optional parts:

	finish	available from	code no.
ShowerSelect Comfort E Extension element 5 mm	Chrome NEW Q3/2023 13612000		
	Brushed Bronze NEW Q3/2023 13612140		
	Brushed Black Chrome NEW Q3/2023 13612340		
	Matt Black NEW Q3/2023 13612670		
	Matt White NEW Q3/2023 13612700		
ShowerSelect Comfort E Extension element 22 mm	Chrome NEW Q3/2023 13617000		
	Brushed Bronze NEW Q3/2023 13617140		
	Brushed Black Chrome NEW Q3/2023 13617340		
	Matt Black NEW Q3/2023 13617670		
	Matt White NEW Q3/2023 13617700		
Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023 13632000	

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

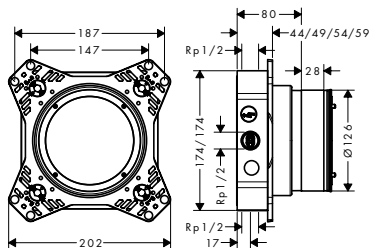

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort E Thermostat for concealed installation

Features

- 1 function
- thermostat cartridge
- water flow control with stop function
- temperature and volume control
- material handles: metal
- maximum flow rate at 3 bar: 59 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2



Sustainability



Technologies



finish		available from	code no.	
	Chrome	NEW	Q3/2023	15574000
	Brushed Bronze	NEW	Q3/2023	15574140
	Brushed Black Chrome	NEW	Q3/2023	15574340
	Matt Black	NEW	Q3/2023	15574670
	Matt White	NEW	Q3/2023	15574700

Required parts:



iBox universal 2 Basic set

NEW

available from
Q3/2023

code no.
01500180

Optional parts:



ShowerSelect Comfort E Extension element 5 mm

finish		available from	code no.	
	Chrome	NEW	Q3/2023	13612000
	Brushed Bronze	NEW	Q3/2023	13612140
	Brushed Black Chrome	NEW	Q3/2023	13612340
	Matt Black	NEW	Q3/2023	13612670
	Matt White	NEW	Q3/2023	13612700



ShowerSelect Comfort E Extension element 22 mm

	Chrome	NEW	Q3/2023	13617000
	Brushed Bronze	NEW	Q3/2023	13617140
	Brushed Black Chrome	NEW	Q3/2023	13617340
	Matt Black	NEW	Q3/2023	13617670
	Matt White	NEW	Q3/2023	13617700



Extension iBox universal 2 basic set 2,5 cm

NEW


available from
Q3/2023

code no.
13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

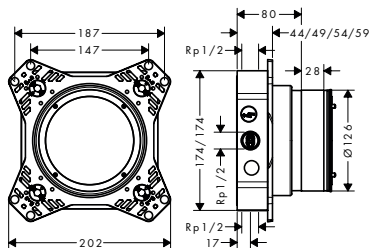

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort E Thermostat for concealed installation for 1 function and additional outlet

Features

- 1 function and 1 additional outlet
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of one consumer with large Select-paddle
- material button: metal
- material handles: metal
- maximum flow rate at 3 bar: 59 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2
- thermostat is delivered with button On/Off



Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15575000
Brushed Bronze	NEW	Q3/2023	15575140
Brushed Black Chrome	NEW	Q3/2023	15575340
Matt Black	NEW	Q3/2023	15575670
Matt White	NEW	Q3/2023	15575700

Required parts:

	iBox universal 2 Basic set	NEW	available from	code no.
			Q3/2023	01500180


Optional parts:

		finish		available from	code no.
	ShowerSelect Comfort E Extension element 5 mm	Chrome	NEW	Q3/2023	13612000
		Brushed Bronze	NEW	Q3/2023	13612140
		Brushed Black Chrome	NEW	Q3/2023	13612340
		Matt Black	NEW	Q3/2023	13612670
		Matt White	NEW	Q3/2023	13612700
	ShowerSelect Comfort E Extension element 22 mm	Chrome	NEW	Q3/2023	13617000
		Brushed Bronze	NEW	Q3/2023	13617140
		Brushed Black Chrome	NEW	Q3/2023	13617340
		Matt Black	NEW	Q3/2023	13617670
		Matt White	NEW	Q3/2023	13617700
	Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023	13632000	

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

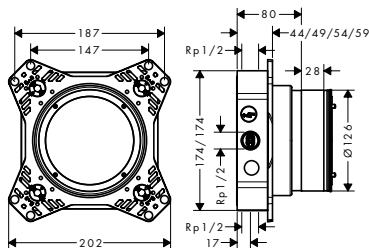

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort E Valve for concealed installation for 3 functions

Features

- 3 functions
- Start/stop valve to operate the functions
- comfortable turning on / off of consumers with large Select-paddle
- material button: metal
- simultaneous use of several outlets
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- connection type: basic set iBox universal 2
- valve is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15573000
Brushed Bronze	NEW	Q3/2023	15573140
Brushed Black Chrome	NEW	Q3/2023	15573340
Matt Black	NEW	Q3/2023	15573670
Matt White	NEW	Q3/2023	15573700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort E Extension element 5 mm

finish

Chrome

NEW

available from

Q3/2023

code no.

13612000

Brushed Bronze

NEW

Q3/2023

13612140

Brushed Black Chrome

NEW

Q3/2023

13612340

Matt Black

NEW

Q3/2023

13612670

Matt White

NEW

Q3/2023

13612700



ShowerSelect Comfort E Extension element 22 mm

Chrome

NEW

Q3/2023

13617000

Brushed Bronze

NEW

Q3/2023

13617140

Brushed Black Chrome

NEW

Q3/2023

13617340

Matt Black

NEW

Q3/2023

13617670

Matt White

NEW

Q3/2023

13617700



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

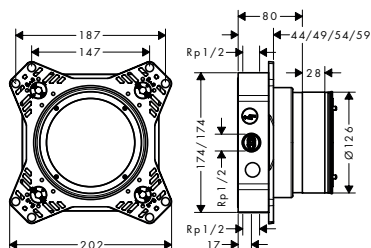

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort Q Thermostat for concealed installation for 1 function

Features

- 1 function
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of one consumer with large Select-paddle
- material button: metal
- material handles: metal
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set
- thermostat is delivered with button On/Off



Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15581000
Brushed Bronze	NEW	Q3/2023	15581140
Brushed Black Chrome	NEW	Q3/2023	15581340
Matt Black	NEW	Q3/2023	15581670
Matt White	NEW	Q3/2023	15581700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort Q Extension element 5 mm

finish		available from	code no.
Chrome	NEW	Q3/2023	13613000
Brushed Bronze	NEW	Q3/2023	13613140
Brushed Black Chrome	NEW	Q3/2023	13613340
Matt Black	NEW	Q3/2023	13613670
Matt White	NEW	Q3/2023	13613700



ShowerSelect Comfort Q Extension element 22 mm

Chrome	NEW	Q3/2023	13618000
Brushed Bronze	NEW	Q3/2023	13618140
Brushed Black Chrome	NEW	Q3/2023	13618340
Matt Black	NEW	Q3/2023	13618670
Matt White	NEW	Q3/2023	13618700



Extension iBox universal 2 basic set 2,5 cm


NEW

available from Q3/2023

code no. 13632000

iBox universal 2 Basic set**Features**

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

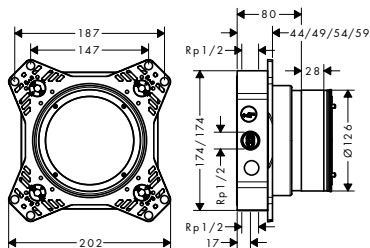**Technologies****Installation**

	available from	code no.
NEW	Q3/2023	01500180

Optional parts:

Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort Q Thermostats for concealed installation for 2 functions

Features of all variants

- 2 functions
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of consumers with large Select-paddle
- material button: metal
- material handles: metal
- simultaneous use of several outlets
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set
- thermostat is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Sustainability



Technologies



Overview variants


security combination EN 1717	finish		available from	code no.
-	Chrome	NEW	Q3/2023	15583000
	Brushed Bronze	NEW	Q3/2023	15583140
	Brushed Black Chrome	NEW	Q3/2023	15583340
	Matt Black	NEW	Q3/2023	15583670
	Matt White	NEW	Q3/2023	15583700
	■	Chrome	NEW	Q3/2023
Brushed Bronze		NEW	Q3/2023	15586140
Brushed Black Chrome		NEW	Q3/2023	15586340
Matt Black		NEW	Q3/2023	15586670
Matt White		NEW	Q3/2023	15586700

! Required parts:			available from	code no.
	iBox universal 2 Basic set	NEW	Q3/2023	01500180

Optional parts:		finish		available from	code no.
	ShowerSelect Comfort Q Extension element 5 mm	Chrome	NEW	Q3/2023	13613000
		Brushed Bronze	NEW	Q3/2023	13613140
		Brushed Black Chrome	NEW	Q3/2023	13613340
		Matt Black	NEW	Q3/2023	13613670
		Matt White	NEW	Q3/2023	13613700
	ShowerSelect Comfort Q Extension element 22 mm	Chrome	NEW	Q3/2023	13618000
		Brushed Bronze	NEW	Q3/2023	13618140
		Brushed Black Chrome	NEW	Q3/2023	13618340
		Matt Black	NEW	Q3/2023	13618670
		Matt White	NEW	Q3/2023	13618700
	Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023	13632000	

iBox universal 2 Basic set**Features**

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

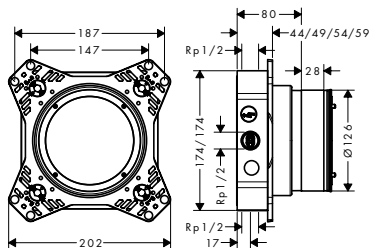**Technologies****Installation**

	available from	code no.
NEW	Q3/2023	01500180

Optional parts:

Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort Q Thermostat for concealed installation

Features

- 1 function
- thermostat cartridge
- water flow control with stop function
- temperature and volume control
- material handles: metal
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2



Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15588000
Brushed Bronze	NEW	Q3/2023	15588140
Brushed Black Chrome	NEW	Q3/2023	15588340
Matt Black	NEW	Q3/2023	15588670
Matt White	NEW	Q3/2023	15588700

Required parts:



iBox universal 2 Basic set

NEW

available from
Q3/2023

code no.
01500180

Optional parts:



ShowerSelect Comfort Q Extension element 5 mm

finish

- Chrome
- Brushed Bronze
- Brushed Black Chrome
- Matt Black
- Matt White

NEW
NEW
NEW
NEW
NEW

available from
Q3/2023
Q3/2023
Q3/2023
Q3/2023
Q3/2023

code no.
13613000
13613140
13613340
13613670
13613700



ShowerSelect Comfort Q Extension element 22 mm

- Chrome
- Brushed Bronze
- Brushed Black Chrome
- Matt Black
- Matt White

NEW
NEW
NEW
NEW
NEW

available from
Q3/2023
Q3/2023
Q3/2023
Q3/2023
Q3/2023

code no.
13618000
13618140
13618340
13618670
13618700



Extension iBox universal 2 basic set 2,5 cm


NEW

available from
Q3/2023

code no.
13632000

iBox universal 2 Basic set**Features**

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

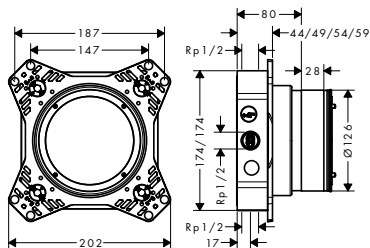**Technologies****Installation**

	available from	code no.
NEW	Q3/2023	01500180

Optional parts:

Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort Q Thermostat for concealed installation for 1 function and additional outlet

Features

- 1 function and 1 additional outlet
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of one consumer with large Select-paddle
- material button: metal
- material handles: metal
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2
- thermostat is delivered with button On/Off



Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15589000
Brushed Bronze	NEW	Q3/2023	15589140
Brushed Black Chrome	NEW	Q3/2023	15589340
Matt Black	NEW	Q3/2023	15589670
Matt White	NEW	Q3/2023	15589700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort Q Extension element 5 mm

finish		available from	code no.
Chrome	NEW	Q3/2023	13613000
Brushed Bronze	NEW	Q3/2023	13613140
Brushed Black Chrome	NEW	Q3/2023	13613340
Matt Black	NEW	Q3/2023	13613670
Matt White	NEW	Q3/2023	13613700

ShowerSelect Comfort Q Extension element 22 mm	Chrome	NEW	Q3/2023	13618000
	Brushed Bronze	NEW	Q3/2023	13618140
	Brushed Black Chrome	NEW	Q3/2023	13618340
	Matt Black	NEW	Q3/2023	13618670
	Matt White	NEW	Q3/2023	13618700

Extension iBox universal 2 basic set 2,5 cm		NEW	Q3/2023	13632000
---	--	-----	---------	----------



Extension iBox universal 2 basic set 2,5 cm

NEW

available from

Q3/2023


code no.

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

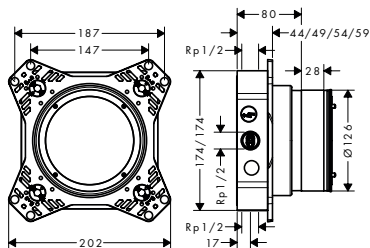

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from	code no.
Q3/2023	13588000



Extension iBox universal 2 basic set 2,5 cm

NEW

available from	code no.
Q3/2023	13632000

ShowerSelect Comfort Q Valve for concealed installation for 3 functions

Features

- 3 functions
- Start/stop valve to operate the functions
- comfortable turning on / off of consumers with large Select-paddle
- material button: metal
- simultaneous use of several outlets
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- connection type: basic set
- valve is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Technologies



finish		available from	code no.
	Chrome	NEW	Q3/2023 15587000
	Brushed Bronze	NEW	Q3/2023 15587140
	Brushed Black Chrome	NEW	Q3/2023 15587340
	Matt Black	NEW	Q3/2023 15587670
	Matt White	NEW	Q3/2023 15587700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort Q Extension element 5 mm

finish



Chrome NEW

available from

Q3/2023

code no.

13613000



Brushed Bronze NEW

Q3/2023

13613140



Brushed Black Chrome NEW

Q3/2023

13613340



Matt Black NEW

Q3/2023

13613670



Matt White NEW

Q3/2023

13613700



ShowerSelect Comfort Q Extension element 22 mm



Chrome NEW

Q3/2023

13618000



Brushed Bronze NEW

Q3/2023

13618140



Brushed Black Chrome NEW

Q3/2023

13618340



Matt Black NEW

Q3/2023

13618670



Matt White NEW

Q3/2023

13618700



Extension iBox universal 2 basic set 2,5 cm


NEW

Q3/2023

13632000

iBox universal 2 Basic set**Features**

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

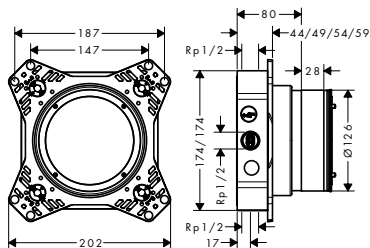**Technologies****Installation**

	available from	code no.
NEW	Q3/2023	01500180

Optional parts:

Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort S Thermostat for concealed installation for 1 function

Features

- 1 function
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of one consumer with large Select-paddle
- material button: metal
- material handles: metal
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2
- thermostat is delivered with button On/Off



Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15553000
Brushed Bronze	NEW	Q3/2023	15553140
Brushed Black Chrome	NEW	Q3/2023	15553340
Matt Black	NEW	Q3/2023	15553670
Matt White	NEW	Q3/2023	15553700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort S Extension element 5 mm

finish		available from	code no.
Chrome	NEW	Q3/2023	13614000
Brushed Bronze	NEW	Q3/2023	13614140
Brushed Black Chrome	NEW	Q3/2023	13614340
Matt Black	NEW	Q3/2023	13614670
Matt White	NEW	Q3/2023	13614700



ShowerSelect Comfort S Extension element 22 mm



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

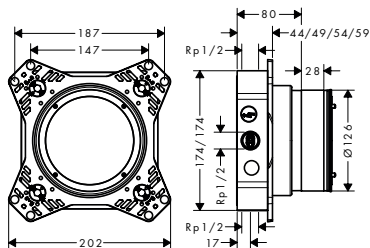

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort S Thermostats for concealed installation for 2 functions

Features of all variants

- 2 functions
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of consumers with large Select-paddle
- material button: metal
- material handles: metal
- simultaneous use of several outlets
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2
- thermostat is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Sustainability



Technologies



Overview variants

security combination EN 1717	finish	available from	code no.
-	Chrome NEW	Q3/2023	15554000
	Brushed Bronze NEW	Q3/2023	15554140
	Brushed Black Chrome NEW	Q3/2023	15554340
	Matt Black NEW	Q3/2023	15554670
	Matt White NEW	Q3/2023	15554700
■	Chrome NEW	Q3/2023	15556000
	Brushed Bronze NEW	Q3/2023	15556140
	Brushed Black Chrome NEW	Q3/2023	15556340
	Matt Black NEW	Q3/2023	15556670
	Matt White NEW	Q3/2023	15556700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort S Extension element 5 mm

finish

available from

code no.

- Chrome NEW Q3/2023 13614000
- Brushed Bronze NEW Q3/2023 13614140
- Brushed Black Chrome NEW Q3/2023 13614340
- Matt Black NEW Q3/2023 13614670
- Matt White NEW Q3/2023 13614700



ShowerSelect Comfort S Extension element 22 mm

- Chrome NEW Q3/2023 13624000
- Brushed Bronze NEW Q3/2023 13624140
- Brushed Black Chrome NEW Q3/2023 13624340
- Matt Black NEW Q3/2023 13624670
- Matt White NEW Q3/2023 13624700



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

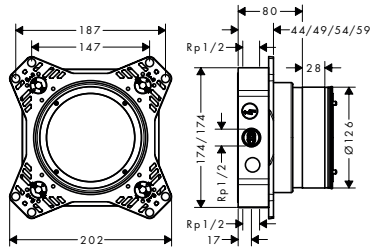

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180


Optional parts:

	available from	code no.
 Adapter plate for iBox universal 2	NEW	Q3/2023 13588000
 Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023 13632000

ShowerSelect Comfort S Thermostat for concealed installation

Features

- 1 function
- thermostat cartridge
- water flow control with stop function
- temperature and volume control
- material handles: metal
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2



Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15559000
Brushed Bronze	NEW	Q3/2023	15559140
Brushed Black Chrome	NEW	Q3/2023	15559340
Matt Black	NEW	Q3/2023	15559670
Matt White	NEW	Q3/2023	15559700

Required parts:

	iBox universal 2 Basic set	NEW	available from	code no.
			Q3/2023	01500180


Optional parts:

		finish		available from	code no.
	ShowerSelect Comfort S Extension element 5 mm	Chrome	NEW	Q3/2023	13614000
		Brushed Bronze	NEW	Q3/2023	13614140
		Brushed Black Chrome	NEW	Q3/2023	13614340
		Matt Black	NEW	Q3/2023	13614670
		Matt White	NEW	Q3/2023	13614700
	ShowerSelect Comfort S Extension element 22 mm	Chrome	NEW	Q3/2023	13624000
		Brushed Bronze	NEW	Q3/2023	13624140
		Brushed Black Chrome	NEW	Q3/2023	13624340
		Matt Black	NEW	Q3/2023	13624670
		Matt White	NEW	Q3/2023	13624700
	Extension iBox universal 2 basic set 2,5 cm		NEW	Q3/2023	13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

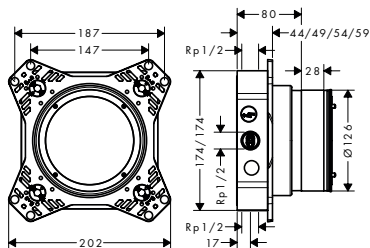

Technologies





Installation



	available from	code no.
NEW	Q3/2023	01500180


Optional parts:

	available from	code no.
 Adapter plate for iBox universal 2	NEW	Q3/2023 13588000
 Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023 13632000

ShowerSelect Comfort S Thermostat for concealed installation for 1 function and additional outlet

Features

- 1 function and 1 additional outlet
- thermostat cartridge, Start/stop valve to operate the functions
- water flow control with stop function
- comfortable turning on / off of one consumer with large Select-paddle
- material button: metal
- material handles: metal
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- connection type: basic set iBox universal 2
- thermostat is delivered with button On/Off



Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15562000
Brushed Bronze	NEW	Q3/2023	15562140
Brushed Black Chrome	NEW	Q3/2023	15562340
Matt Black	NEW	Q3/2023	15562670
Matt White	NEW	Q3/2023	15562700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort S Extension element 5 mm

finish

available from

code no.

Chrome	NEW	Q3/2023	13614000
Brushed Bronze	NEW	Q3/2023	13614140
Brushed Black Chrome	NEW	Q3/2023	13614340
Matt Black	NEW	Q3/2023	13614670
Matt White	NEW	Q3/2023	13614700



ShowerSelect Comfort S Extension element 22 mm

Chrome	NEW	Q3/2023	13624000
Brushed Bronze	NEW	Q3/2023	13624140
Brushed Black Chrome	NEW	Q3/2023	13624340
Matt Black	NEW	Q3/2023	13624670
Matt White	NEW	Q3/2023	13624700



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

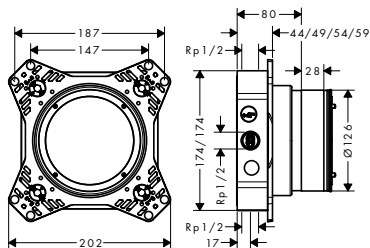

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

ShowerSelect Comfort S Valve for concealed installation for 3 functions

Features

- 3 functions
- Start/stop valve to operate the functions
- comfortable turning on / off of consumers with large Select-paddle
- material button: metal
- simultaneous use of several outlets
- flat escutcheon for more space in the shower
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- connection type: basic set
- valve is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub

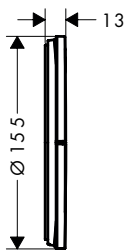

Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	15558000
Brushed Bronze	NEW	Q3/2023	15558140
Brushed Black Chrome	NEW	Q3/2023	15558340
Matt Black	NEW	Q3/2023	15558670
Matt White	NEW	Q3/2023	15558700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



ShowerSelect Comfort S Extension element
5 mm

finish

Chrome

NEW

available from

Q3/2023

code no.

13614000

Brushed Bronze

NEW

Q3/2023

13614140

Brushed Black Chrome

NEW

Q3/2023

13614340

Matt Black

NEW

Q3/2023

13614670

Matt White

NEW

Q3/2023

13614700



ShowerSelect Comfort S Extension element
22 mm

Chrome

NEW

Q3/2023

13624000

Brushed Bronze

NEW

Q3/2023

13624140

Brushed Black Chrome

NEW

Q3/2023

13624340

Matt Black

NEW

Q3/2023

13624670

Matt White

NEW

Q3/2023

13624700



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

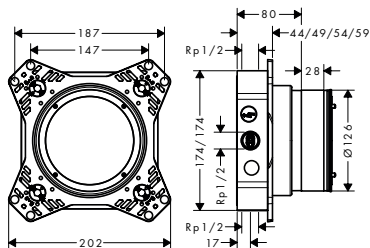

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW

Q3/2023

13632000




DuoTurn

DuoTurn E Mixer for concealed installation for 1 function

Features

- 1 function
- volume control for 1 outlet
- ceramic cartridge for temperature control, 1/2" ceramic shut-off valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with button On/Off



Sustainability



finish		available from	code no.
Chrome	NEW	Q3/2023	75617000
Brushed Bronze	NEW	Q3/2023	75617140
Matt Black	NEW	Q3/2023	75617670
Matt White	NEW	Q3/2023	75617700

Required parts:

	iBox universal 2 Basic set	NEW	Q3/2023	01500180
--	----------------------------	-----	---------	----------


Optional parts:

		finish		available from	code no.
	ShowerSelect Comfort E Extension element 5 mm	Chrome	NEW	Q3/2023	13612000
		Brushed Bronze	NEW	Q3/2023	13612140
		Matt Black	NEW	Q3/2023	13612670
		Matt White	NEW	Q3/2023	13612700
	ShowerSelect Comfort E Extension element 22 mm	Chrome	NEW	Q3/2023	13617000
		Brushed Bronze	NEW	Q3/2023	13617140
		Matt Black	NEW	Q3/2023	13617670
		Matt White	NEW	Q3/2023	13617700
	DuoTurn Q Adapter for ShowerSelect Comfort extension element		NEW	Q3/2023	13628000
	Extension iBox universal 2 basic set 2,5 cm		NEW	Q3/2023	13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

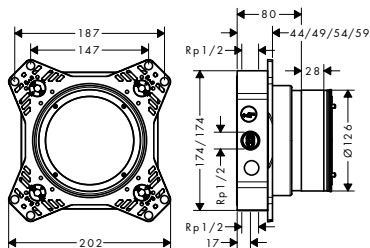

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

DuoTurn E Mixer for concealed installation for 2 functions

Features

- 2 functions
- volume control and diverter for 2 outlets
- maximum flow rate at 3 bar: 31 l/min
- flow rate of hand shower at 3 bar: 24 l/min
- ceramic cartridge for temperature control, shut-off/diverter valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Sustainability



finish		available from	code no.
Chrome	NEW	Q3/2023	75417000
Brushed Bronze	NEW	Q3/2023	75417140
Matt Black	NEW	Q3/2023	75417670
Matt White	NEW	Q3/2023	75417700

Required parts:

	iBox universal 2 Basic set	NEW	available from	code no.
			Q3/2023	01500180


Optional parts:

	Security combination according to EN 1717	NEW	available from	code no.	
			Q2/2023	13077000	
	ShowerSelect Comfort E Extension element 5 mm				
		Chrome	NEW	Q3/2023	13612000
		Brushed Bronze	NEW	Q3/2023	13612140
		Matt Black	NEW	Q3/2023	13612670
		Matt White	NEW	Q3/2023	13612700
	ShowerSelect Comfort E Extension element 22 mm				
		Chrome	NEW	Q3/2023	13617000
		Brushed Bronze	NEW	Q3/2023	13617140
		Matt Black	NEW	Q3/2023	13617670
		Matt White	NEW	Q3/2023	13617700
	DuoTurn Q Adapter for ShowerSelect Comfort extension element	NEW	available from	code no.	
			Q3/2023	13628000	
	Extension iBox universal 2 basic set 2,5 cm	NEW	available from	code no.	
			Q3/2023	13632000	

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

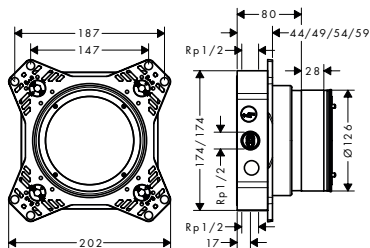

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.
13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

code no.
13632000

DuoTurn Q Mixer for concealed installation for 1 function

Features

- 1 function
- volume control for 1 outlet
- ceramic cartridge for temperature control, 1/2" ceramic shut-off valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with button On/Off



Sustainability



finish		available from	code no.
Chrome	NEW	Q3/2023	75614000
Brushed Bronze	NEW	Q3/2023	75614140
Matt Black	NEW	Q3/2023	75614670
Matt White	NEW	Q3/2023	75614700

Required parts:

	iBox universal 2 Basic set	NEW	Q3/2023	01500180
--	----------------------------	-----	---------	----------



Optional parts:

		finish		available from	code no.
	ShowerSelect Comfort Q Extension element 5 mm	Chrome	NEW	Q3/2023	13613000
		Brushed Bronze	NEW	Q3/2023	13613140
		Matt Black	NEW	Q3/2023	13613670
		Matt White	NEW	Q3/2023	13613700
	ShowerSelect Comfort Q Extension element 22 mm	Chrome	NEW	Q3/2023	13618000
		Brushed Bronze	NEW	Q3/2023	13618140
		Matt Black	NEW	Q3/2023	13618670
		Matt White	NEW	Q3/2023	13618700
	DuoTurn Q Adapter for ShowerSelect Comfort extension element		NEW	Q3/2023	13628000
	Extension iBox universal 2 basic set 2,5 cm		NEW	Q3/2023	13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

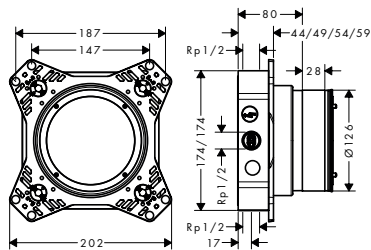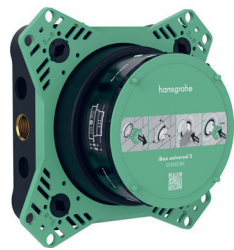

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

DuoTurn Q Mixer for concealed installation for 2 functions

Features

- 2 functions
- volume control and diverter for 2 outlets
- maximum flow rate at 3 bar: 31 l/min
- flow rate of hand shower at 3 bar: 24 l/min
- ceramic cartridge for temperature control, shut-off/diverter valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Sustainability



finish		available from	code no.	
	Chrome	NEW	Q3/2023	75414000
	Brushed Bronze	NEW	Q3/2023	75414140
	Matt Black	NEW	Q3/2023	75414670
	Matt White	NEW	Q3/2023	75414700

Required parts:



iBox universal 2 Basic set

NEW

available from

Q3/2023

code no.

01500180

Optional parts:



Security combination according to EN 1717

NEW

available from

Q2/2023

code no.

13077000



ShowerSelect Comfort Q Extension element 5 mm

finish

Chrome

NEW

available from

Q3/2023

code no.

13613000

Brushed Bronze

NEW

available from

Q3/2023

code no.

13613140

Matt Black

NEW

available from

Q3/2023

code no.

13613670

Matt White

NEW

available from

Q3/2023

code no.

13613700



ShowerSelect Comfort Q Extension element 22 mm

Chrome

NEW

available from

Q3/2023

code no.

13618000

Brushed Bronze

NEW

available from

Q3/2023

code no.

13618140

Matt Black

NEW

available from

Q3/2023

code no.

13618670

Matt White

NEW

available from

Q3/2023

code no.

13618700



DuoTurn Q Adapter for ShowerSelect Comfort extension element

NEW

available from

Q3/2023

code no.

13628000



Extension iBox universal 2 basic set 2,5 cm

NEW

available from

Q3/2023


code no.

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

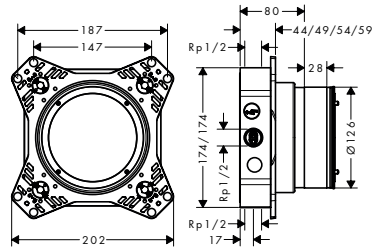

Technologies





Installation



	available from	code no.
NEW	Q3/2023	01500180


Optional parts:

	available from	code no.
 Adapter plate for iBox universal 2	NEW	Q3/2023 13588000
 Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023 13632000

DuoTurn S Mixer for concealed installation for 1 function

Features

- 1 function
- volume control for 1 outlet
- ceramic cartridge for temperature control, 1/2" ceramic shut-off valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with button On/Off



Sustainability



finish		available from	code no.
Chrome	NEW	Q3/2023	75618000
Brushed Bronze	NEW	Q3/2023	75618140
Matt Black	NEW	Q3/2023	75618670
Matt White	NEW	Q3/2023	75618700

Required parts:

	iBox universal 2 Basic set	NEW	Q3/2023	01500180
--	----------------------------	-----	---------	----------



Optional parts:

		finish		available from	code no.
	ShowerSelect Comfort S Extension element 5 mm	Chrome	NEW	Q3/2023	13614000
		Brushed Bronze	NEW	Q3/2023	13614140
		Matt Black	NEW	Q3/2023	13614670
		Matt White	NEW	Q3/2023	13614700
	ShowerSelect Comfort S Extension element 22 mm	Chrome	NEW	Q3/2023	13624000
		Brushed Bronze	NEW	Q3/2023	13624140
		Matt Black	NEW	Q3/2023	13624670
		Matt White	NEW	Q3/2023	13624700
	DuoTurn S Adapter for ShowerSelect Comfort extension element		NEW	Q3/2023	13631000
	Extension iBox universal 2 basic set 2,5 cm		NEW	Q3/2023	13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

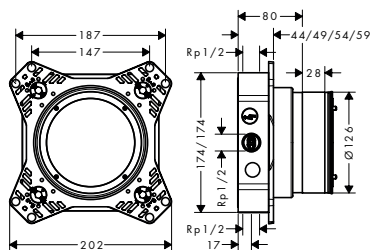

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

DuoTurn S Mixer for concealed installation for 2 functions

Features

- 2 functions
- volume control and diverter for 2 outlets
- maximum flow rate at 3 bar: 31 l/min
- flow rate of hand shower at 3 bar: 24 l/min
- ceramic cartridge for temperature control, shut-off/diverter valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub

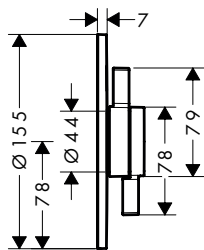

Sustainability



finish		available from	code no.
	Chrome	NEW	Q3/2023 75418000
	Brushed Bronze	NEW	Q3/2023 75418140
	Matt Black	NEW	Q3/2023 75418670
	Matt White	NEW	Q3/2023 75418700

Required parts:



iBox universal 2 Basic set

NEW

available from
Q3/2023

code no.
01500180

Optional parts:



Security combination according to EN 1717

NEW

available from
Q2/2023

code no.
13077000



ShowerSelect Comfort S Extension element 5 mm

- Chrome
- Brushed Bronze
- Matt Black
- Matt White

NEW

available from
Q3/2023

code no.
13614000
13614140
13614670
13614700



ShowerSelect Comfort S Extension element 22 mm

- Chrome
- Brushed Bronze
- Matt Black
- Matt White

NEW

available from
Q3/2023

code no.
13624000
13624140
13624670
13624700



DuoTurn S Adapter for ShowerSelect Comfort extension element

NEW

Q3/2023

13631000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

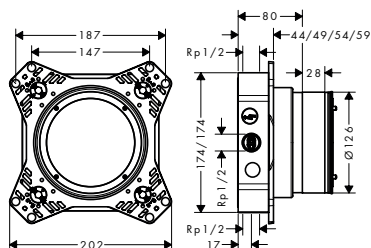

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW

Q3/2023

13632000

DuoTurn S

Security combination according to EN 1717

Features

- can be retrofitted for all mixers for concealed installation for 2 functions for iBox universal 2
- protected against backflow, according to DIN EN 1717



	available from	code no.
NEW	Q2/2023	13077000




Tecturis

Tecturis S Single lever basin mixers Fine CoolStart

Features of all variants

- spray type: normal spray
- ceramic cartridge
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15
- cold water in middle position

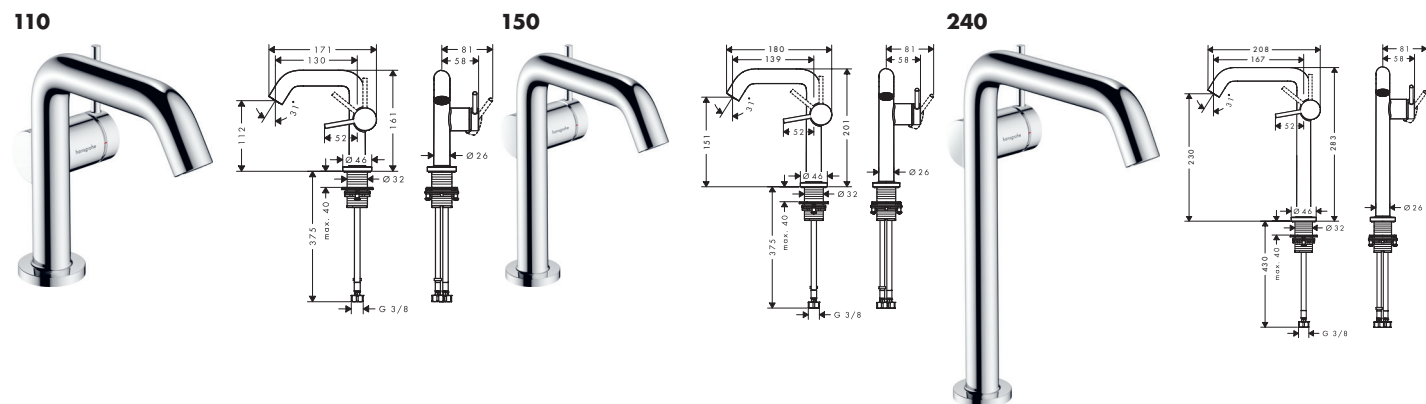

Sustainability



Technologies




Overview variants

Comfort-Zone	projection (mm)	spout height (mm)	waste set	CoolStart	for wash bowls	finish	available from	code no.
110	130	112	push-open	■	-	● Chrome NEW Q2/2023 73320000	Q2/2023	73320000
						● Brushed Bronze NEW Q2/2023 73320140		
						● Matt Black NEW Q2/2023 73320670		
						○ Matt White NEW Q2/2023 73320700		
110	130	112	pop-up	■	-	● Chrome NEW Q2/2023 73323000	Q2/2023	73323000
						● Brushed Bronze NEW Q2/2023 73323140		
						● Matt Black NEW Q2/2023 73323670		
						○ Matt White NEW Q2/2023 73323700		
110	130	112	without	■	-	● Chrome NEW Q2/2023 73321000	Q2/2023	73321000
						● Brushed Bronze NEW Q2/2023 73321140		
						● Matt Black NEW Q2/2023 73321670		
						○ Matt White NEW Q2/2023 73321700		
150	139	151	push-open	■	-	● Chrome NEW Q2/2023 73340000	Q2/2023	73340000
						● Brushed Bronze NEW Q2/2023 73340140		
						● Matt Black NEW Q2/2023 73340670		
						○ Matt White NEW Q2/2023 73340700		
150	139	151	without	■	-	● Chrome NEW Q2/2023 73341000	Q2/2023	73341000
						● Brushed Bronze NEW Q2/2023 73341140		
						● Matt Black NEW Q2/2023 73341670		
						○ Matt White NEW Q2/2023 73341700		
240	167	230	push-open	■	■	● Chrome NEW Q2/2023 73370000	Q2/2023	73370000
						● Brushed Bronze NEW Q2/2023 73370140		
						● Matt Black NEW Q2/2023 73370670		
						○ Matt White NEW Q2/2023 73370700		
240	167	230	without	■	■	● Chrome NEW Q2/2023 73372000	Q2/2023	73372000
						● Brushed Bronze NEW Q2/2023 73372140		
						● Matt Black NEW Q2/2023 73372670		
						○ Matt White NEW Q2/2023 73372700		

Tecturis S Single lever basin mixer 210 Fine CoolStart with swivel spout and push-open waste set

Features

- consists of: single lever basin mixer, waste set
- ComfortZone 210
- projection: 154 mm
- spout height: 187 mm
- swivel range 120°
- spray type: normal spray
- ceramic cartridge
- suitable for continuous flow water heaters
- push-open waste set G 1 1/4
- material waste set: metal
- connection type: G 3/8 connections
- connection dimension: DN15
- cold water in middle position

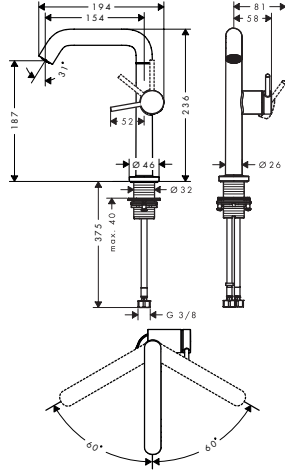

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73360000
Brushed Bronze	NEW	Q2/2023	73360140
Matt Black	NEW	Q2/2023	73360670
Matt White	NEW	Q2/2023	73360700

Tecturis S 2-hole basin mixer 150 CoolStart with waste set

Features

- consists of: 2-hole basin mixer, waste set
- ComfortZone 150
- projection: 139 mm
- spout height: 151 mm
- spray type: normal spray
- Select cartridge with temperature control
- comfortable operation turning and pushing movement
- material control element: metal housing, safety glass
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: G 3/8 connections
- connection dimension: DN15
- flexible positioning of control element possible
- cold water in middle position
- no soiling of the outlet due to water spots
- quick connect hose

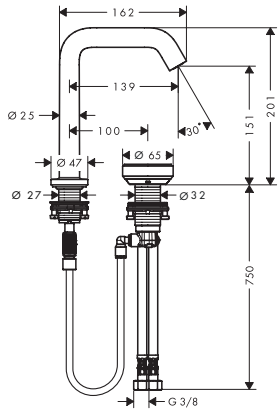

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73353000
Brushed Bronze	NEW	Q2/2023	73353140
Matt Black	NEW	Q2/2023	73353670
Matt White	NEW	Q2/2023	73353700

Tecturis S 3-hole basin mixer 150 with push-open waste set

Features

- consists of: 3-hole basin mixer, waste set
- ComfortZone 150
- projection: 139 mm
- spout height: 152 mm
- spray type: normal spray
- ceramic cartridge
- suitable for continuous flow water heaters
- push-open waste set G 1 1/4
- material waste set: metal
- connection type: G 3/8 connections
- connection dimension: DN 15

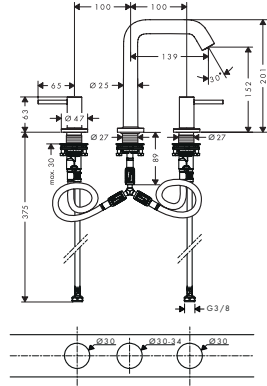

Sustainability



Technologies




finish		available from	code no.
● Chrome	NEW	Q2/2023	73330000
● Brushed Bronze	NEW	Q2/2023	73330140
● Matt Black	NEW	Q2/2023	73330670
○ Matt White	NEW	Q2/2023	73330700

Tecturis S Single lever basin mixers


Features of all variants

- spray type: normal spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15

80

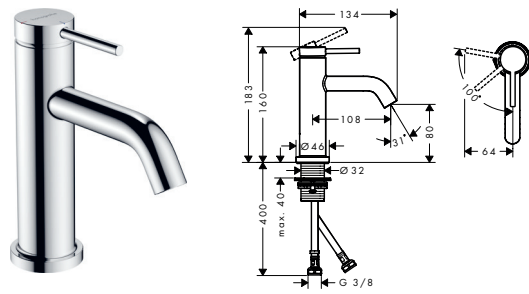

110

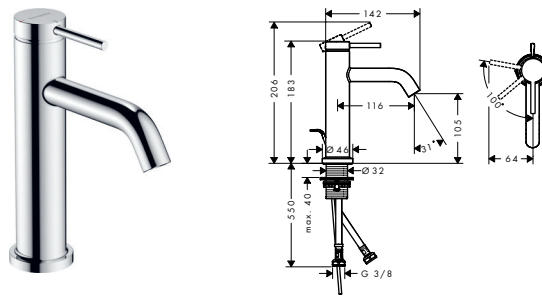

Sustainability



Technologies



Overview variants

ComfortZone	projection (mm)	spout height (mm)	waste set	CoolStart	finish	available from	code no.	
80	108	80	pop-up	■	● Chrome	NEW	Q2/2023	73302000
					● Brushed Bronze	NEW	Q2/2023	73302140
					● Matt Black	NEW	Q2/2023	73302670
					○ Matt White	NEW	Q2/2023	73302700
80	108	80	without	■	● Chrome	NEW	Q2/2023	73301000
					● Brushed Bronze	NEW	Q2/2023	73301140
					● Matt Black	NEW	Q2/2023	73301670
					○ Matt White	NEW	Q2/2023	73301700
110	116	105	pop-up	■	● Chrome	NEW	Q2/2023	73314000
					● Brushed Bronze	NEW	Q2/2023	73314140
					● Matt Black	NEW	Q2/2023	73314670
					○ Matt White	NEW	Q2/2023	73314700
110	116	105	without	■	● Chrome	NEW	Q2/2023	73312000
					● Brushed Bronze	NEW	Q2/2023	73312140
					● Matt Black	NEW	Q2/2023	73312670
					○ Matt White	NEW	Q2/2023	73312700
110	116	105	pop-up	-	● Chrome	NEW	Q2/2023	73310000
					● Brushed Bronze	NEW	Q2/2023	73310140
					● Matt Black	NEW	Q2/2023	73310670
					○ Matt White	NEW	Q2/2023	73310700
110	116	105	without	-	● Chrome	NEW	Q2/2023	73311000
					● Brushed Bronze	NEW	Q2/2023	73311140
					● Matt Black	NEW	Q2/2023	73311670
					○ Matt White	NEW	Q2/2023	73311700


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Tecturis S Single lever basin mixer 110 with bidette hand shower and shower hose 160 cm

Features

- consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose
- ComfortZone 110
- projection: 116 mm
- spout height: 105 mm
- spray type: normal spray
- spray type Bidette: shower spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15
- non-return valve

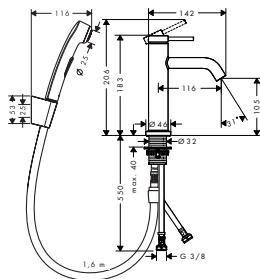

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73211000
Matt Black	NEW	Q2/2023	73211670

Tecturis S Pillar tap 80 with lever handle for cold water or pre-adjusted water without waste set

Features

- ComfortZone 80
- projection: 108 mm
- spout height: 80 mm
- spray type: normal spray
- ceramic cartridge
- for cold water connection
- connection type: G 3/8 connections
- connection dimension: DN15

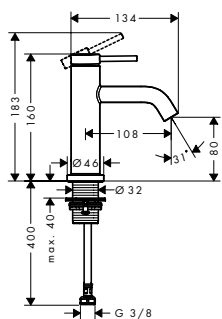

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73313000
Brushed Bronze	NEW	Q2/2023	73313140
Matt Black	NEW	Q2/2023	73313670
Matt White	NEW	Q2/2023	73313700

Tecturis S Single lever basin mixers for concealed installation wall-mounted


Features of all variants

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- spray type: normal spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: basic set
- connection dimension: DN15
- handle can be positioned on the right or left, depending on the basic set installation

165

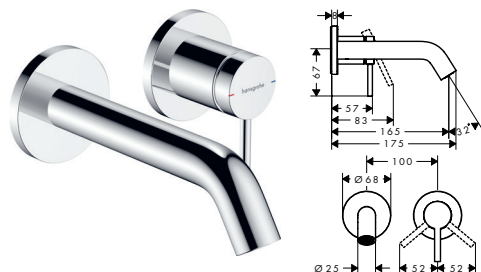

225

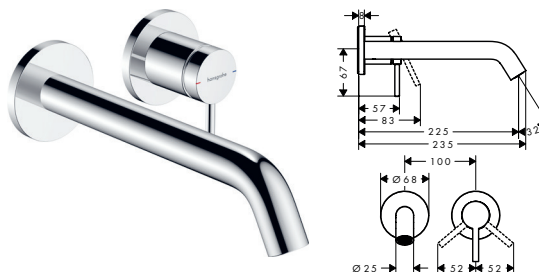

Sustainability




Technologies



Overview variants

projection (mm)	finish	available from	code no.
165	Chrome	NEW	Q2/2023 73350000
	Brushed Bronze	NEW	Q2/2023 73350140
	Matt Black	NEW	Q2/2023 73350670
	Matt White	NEW	Q2/2023 73350700
225	Chrome	NEW	Q2/2023 73351000
	Brushed Bronze	NEW	Q2/2023 73351140
	Matt Black	NEW	Q2/2023 73351670
	Matt White	NEW	Q2/2023 73351700


Required parts:

	Basic set for single lever basin mixer for concealed installation wall-mounted	code no. 13622180
--	--	----------------------

Basic set for single lever basin mixer for concealed installation wall-mounted

Features

- variable positioning of the mixer system, can be left or right of the spout
- easy orientation due to support surfaces for the spirit level
- with building protection cover against contamination during assembly
- with dimension indication for exact determination of the installation depth
- with pre-mounted fastening lugs for mounting in drywall and solidwall
- sound-decoupled installation
- connection dimension: DN15
- minimum mounting depth: 44 mm
- maximum mounting depth: 72 mm

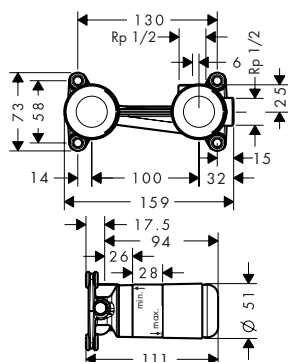


code no.

13622180

Tecturis S Single lever bidet mixer with pop-up waste set

Features

- consists of: single lever bidet mixer, waste set
- projection 148 mm
- spout height: 100 mm
- spray type: laminar spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 1¼
- material waste set: metal
- connection type: G ¾ connections
- connection dimension: DN15

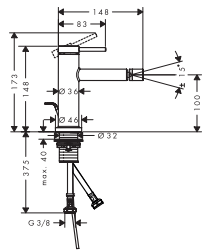


finish		available from	code no.
Chrome	NEW	Q2/2023	73201000
Brushed Bronze	NEW	Q2/2023	73201140
Matt Black	NEW	Q2/2023	73201670
Matt White	NEW	Q2/2023	73201700

Tecturis S Single lever bath mixer floor-standing

Features

- consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- 2 functions
- projection: 194 mm
- spray type mixer: normal spray
- spray type hand shower: PowderRain
- ceramic cartridge
- pressure diverter Select with automatic resetting
- non-return valve
- connection dimension: DN15
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

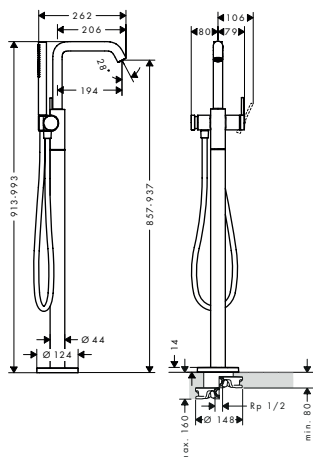

Technologies



finish		available from	code no.
Chrome	NEW	Q2/2023	73440000
Brushed Bronze	NEW	Q2/2023	73440140
Matt Black	NEW	Q2/2023	73440670
Matt White	NEW	Q2/2023	73440700

Required parts:



Basic set for mixers floor-standing

code no.

10452180

Optional parts:



Sealing foil for basic set bath mixer floor-standing


code no.

96441000

Basic set for mixers floor-standing

Features

- for mounting on unfinished floor
- suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- connection dimension: DN15
- minimum mounting depth: 53 mm
- maximum mounting depth: 133 mm

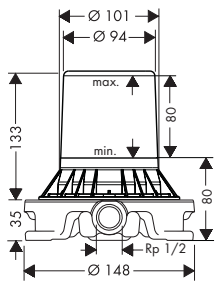

code no.

10452180

Optional parts:



Sealing foil for basic set bath mixer floor-standing


code no.

96441000

Tecturis S Single lever bath mixer for exposed installation

Features

- 2 functions
- projection: 209 mm
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- flow rate for bath spout at 3 bar: 19 l/min
- flow rate of hand shower at 3 bar: 14,7 l/min
- ceramic cartridge
- temperature limitation adjustable
- pressure diverter Select with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: s-shaped connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

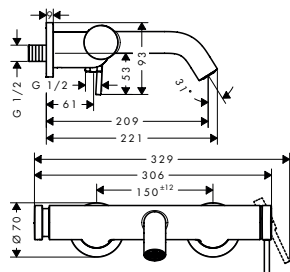

Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73422000
Brushed Bronze	NEW	Q2/2023	73422140
Matt Black	NEW	Q2/2023	73422670
Matt White	NEW	Q2/2023	73422700

DuoTurn S Mixer for concealed installation for 2 functions

Features

- 2 functions
- volume control and diverter for 2 outlets
- maximum flow rate at 3 bar: 31 l/min
- flow rate of hand shower at 3 bar: 24 l/min
- ceramic cartridge for temperature control, shut-off/diverter valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub



Sustainability



finish		available from	code no.
	Chrome	NEW	Q3/2023 75418000
	Brushed Bronze	NEW	Q3/2023 75418140
	Matt Black	NEW	Q3/2023 75418670
	Matt White	NEW	Q3/2023 75418700

Required parts:



iBox universal 2 Basic set

NEW

available from
Q3/2023

code no.
01500180

Optional parts:



Security combination according to EN 1717

NEW

available from
Q2/2023

code no.
13077000



ShowerSelect Comfort S Extension element 5 mm

Chrome NEW

Q3/2023

13614000

Brushed Bronze NEW

Q3/2023

13614140

Matt Black NEW

Q3/2023

13614670

Matt White NEW

Q3/2023

13614700



ShowerSelect Comfort S Extension element 22 mm

Chrome NEW

Q3/2023

13624000

Brushed Bronze NEW

Q3/2023

13624140

Matt Black NEW

Q3/2023

13624670

Matt White NEW

Q3/2023

13624700



DuoTurn S Adapter for ShowerSelect Comfort extension element

NEW

Q3/2023

13631000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

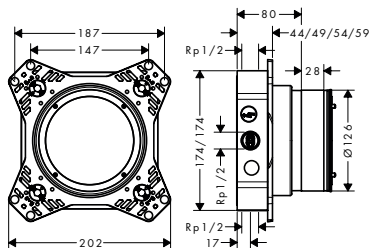

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

Tecturis S Bath spout

Features

- 1 function
- connection type: G 3/4
- with escutcheon
- projection 198 mm
- wall-mounted
- connection dimension: DN20
- spray type: normal spray

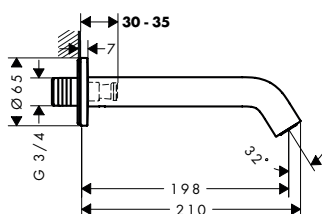

Technologies



finish		available from	code no.
Chrome	NEW	Q2/2023	73411000
Brushed Bronze	NEW	Q2/2023	73411140
Matt Black	NEW	Q2/2023	73411670
Matt White	NEW	Q2/2023	73411700

Optional parts:



Socket for G1/2 connection


code no.

95626000

Tecturis S 3-hole rim mounted single lever bath mixer with sBox

Features

- consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder, shower hose, hose box
- 2 functions
- projection: 194 mm
- spray type mixer: normal spray
- spray type hand shower: PowderRain
- maximum pull-out length of hand shower: 1.45 m
- sBox for quiet, smooth and protected hose guidance
- ceramic cartridge
- diverter with automatic resetting
- non-return valve
- protected against backflow, according to DIN EN 1717
- connection dimension: DN15
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

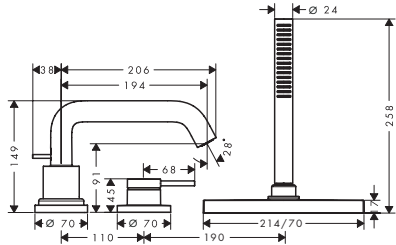

Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73447000
Brushed Bronze	NEW	Q2/2023	73447140
Matt Black	NEW	Q2/2023	73447670
Matt White	NEW	Q2/2023	73447700

! Required parts:		available from	code no.
	Basic set for 3-hole rim mounted single lever bath mixer	NEW	Q3/2023 13481180

Basic set for 3-hole rim mounted single lever bath mixer

Features

- sBox for quiet, smooth and protected hose guidance
- drilling diameter: 35 mm, 50 mm
- clamping range: 0 - 30 mm
- maximum pull-out length of hand shower: 1,45 m
- suitable for installation on bath rim
- connection thread: G 1/2
- connection hose length: 600 mm
- connection dimension: DN15
- bath rim width at least 100 mm
- drilling diameter on bath tub: two drilled holes Ø 50/51 mm and connection by sawing out required (consider template)

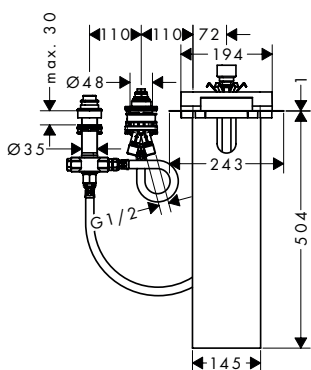






NEW	available from	code no.
	Q3/2023	13481180

Tecturis S Single lever shower mixer for exposed installation

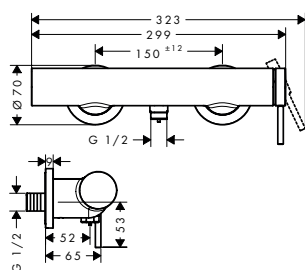Features

- 1 function
- centre distance: 150 ± 12 mm
- maximum flow rate at 3 bar: 12,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection DN15
- connection dimension: DN15
- connection type: s-shaped connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar




finish		available from	code no.
 Chrome	NEW	Q2/2023	73622000
 Brushed Bronze	NEW	Q2/2023	73622140
 Matt Black	NEW	Q2/2023	73622670
 Matt White	NEW	Q2/2023	73622700

DuoTurn S Mixer for concealed installation for 1 function

Features

- 1 function
- volume control for 1 outlet
- ceramic cartridge for temperature control, 1/2" ceramic shut-off valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with button On/Off

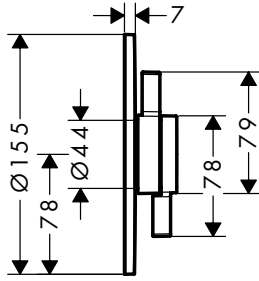

Sustainability



finish		available from	code no.
Chrome	NEW	Q3/2023	75618000
Brushed Bronze	NEW	Q3/2023	75618140
Matt Black	NEW	Q3/2023	75618670
Matt White	NEW	Q3/2023	75618700


Required parts:			available from	code no.
	iBox universal 2 Basic set	NEW	Q3/2023	01500180

Optional parts:		finish		available from	code no.
	ShowerSelect Comfort S Extension element 5 mm	Chrome	NEW	Q3/2023	13614000
		Brushed Bronze	NEW	Q3/2023	13614140
		Matt Black	NEW	Q3/2023	13614670
		Matt White	NEW	Q3/2023	13614700
	ShowerSelect Comfort S Extension element 22 mm	Chrome	NEW	Q3/2023	13624000
		Brushed Bronze	NEW	Q3/2023	13624140
		Matt Black	NEW	Q3/2023	13624670
		Matt White	NEW	Q3/2023	13624700
	DuoTurn S Adapter for ShowerSelect Comfort extension element		NEW	Q3/2023	13631000
	Extension iBox universal 2 basic set 2,5 cm		NEW	Q3/2023	13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

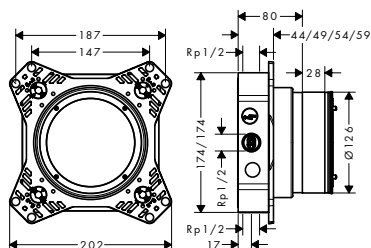

Technologies



Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:



Adapter plate for iBox universal 2

NEW

available from

Q3/2023

code no.

13588000



Extension iBox universal 2 basic set 2,5 cm

NEW

Q3/2023


13632000

Tecturis E Single lever basin mixers Fine


Features of all variants

- spray type: WaterfallStream
- ceramic cartridge
- suitable for continuous flow water heaters
- connection type: G 3/8
- connection dimension: DN15
- cold water in middle position


110

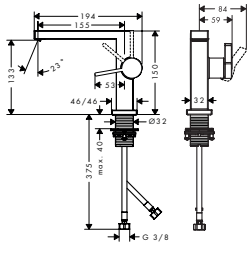

150

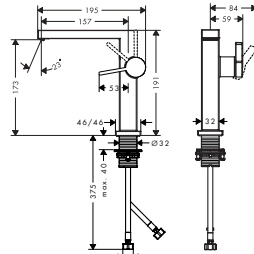

240

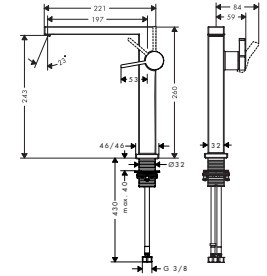

Sustainability



Technologies



Overview variants

Comfort-Zone	projection (mm)	spout height (mm)	waste set	CoolStart	for wash bowls	finish	available from	code no.	
110	155	133	push-open	■	-	● Chrome	NEW	Q2/2023	73020000
						● Brushed Bronze	NEW	Q3/2023	73020140
						● Matt Black	NEW	Q2/2023	73020670
						○ Matt White	NEW	Q3/2023	73020700
110	155	133	pop-up	■	-	● Chrome	NEW	Q3/2023	73023000
						● Brushed Bronze	NEW	Q3/2023	73023140
						● Matt Black	NEW	Q3/2023	73023670
						○ Matt White	NEW	Q3/2023	73023700
110	155	133	without	■	-	● Chrome	NEW	Q3/2023	73021000
						● Brushed Bronze	NEW	Q3/2023	73021140
						● Matt Black	NEW	Q3/2023	73021670
						○ Matt White	NEW	Q3/2023	73021700
150	157	173	push-open	■	-	● Chrome	NEW	Q3/2023	73040000
						● Brushed Bronze	NEW	Q3/2023	73040140
						● Matt Black	NEW	Q3/2023	73040670
						○ Matt White	NEW	Q3/2023	73040700
150	157	173	without	■	-	● Chrome	NEW	Q3/2023	73041000
						● Brushed Bronze	NEW	Q3/2023	73041140
						● Matt Black	NEW	Q3/2023	73041670
						○ Matt White	NEW	Q3/2023	73041700
240	197	243	push-open	■	■	● Chrome	NEW	Q3/2023	73070000
						● Brushed Bronze	NEW	Q3/2023	73070140
						● Matt Black	NEW	Q3/2023	73070670
						○ Matt White	NEW	Q3/2023	73070700
240	197	243	without	■	■	● Chrome	NEW	Q3/2023	73072000
						● Brushed Bronze	NEW	Q3/2023	73072140
						● Matt Black	NEW	Q3/2023	73072670
						○ Matt White	NEW	Q3/2023	73072700


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Tecturis E Single lever basin mixer 210 Fine CoolStart with swivel spout and push-open waste set

Features

- consists of: single lever basin mixer, waste set
- ComfortZone 210
- projection: 157 mm
- spout height: 211 mm
- swivel range 120°
- spray type: WaterfallStream
- ceramic cartridge
- suitable for continuous flow water heaters
- push-open waste set G 1 1/4
- material waste set: metal
- connection type: G 3/8 connections
- connection dimension: DN15
- cold water in middle position

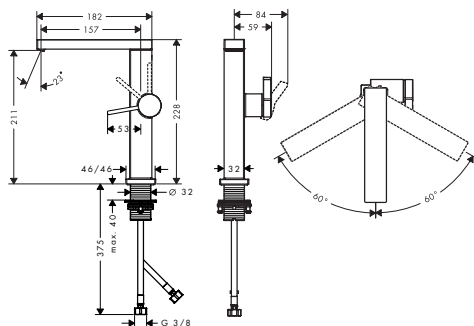

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73060000
Brushed Bronze	NEW	Q3/2023	73060140
Matt Black	NEW	Q2/2023	73060670
Matt White	NEW	Q3/2023	73060700

Tecturis E 2-hole basin mixer 150 CoolStart with waste set

Features

- consists of: 2-hole basin mixer, waste set
- ComfortZone 150
- projection: 158 mm
- spout height: 173 mm
- spray type: WaterfallStream
- Select cartridge with temperature control
- comfortable operation turning and pushing movement
- material control element: metal housing, safety glass
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: G 3/8 connections
- connection dimension: DN15
- flexible positioning of control element possible
- cold water in middle position
- no soiling of the outlet due to water spots
- quick connect hose

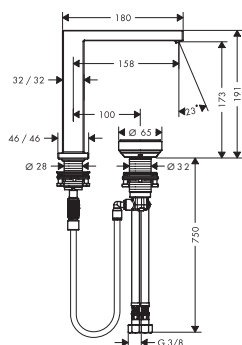

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73053000
Brushed Bronze	NEW	Q3/2023	73053140
Matt Black	NEW	Q2/2023	73053670
Matt White	NEW	Q3/2023	73053700

Tecturis E 3-hole basin mixer 150 with push-open waste set

Features

- consists of: 3-hole basin mixer, waste set
- spray type: WaterfallStream
- ComfortZone 150
- ceramic cartridge
- projection: 158 mm
- suitable for continuous flow water heaters
- material waste set: metal
- spout height: 173 mm
- connection type: G 3/8 connections
- connection dimension: DN 15
- push-open waste set G 1 1/4

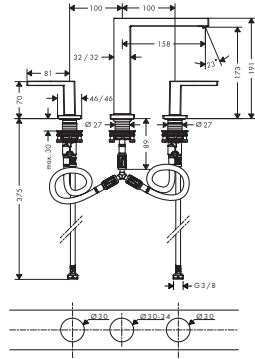

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q3/2023	73030000
Brushed Bronze	NEW	Q3/2023	73030140
Matt Black	NEW	Q3/2023	73030670
Matt White	NEW	Q3/2023	73030700

Tecturis E Single lever basin mixers


Features of all variants

- spray type: WaterfallStream
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15

80

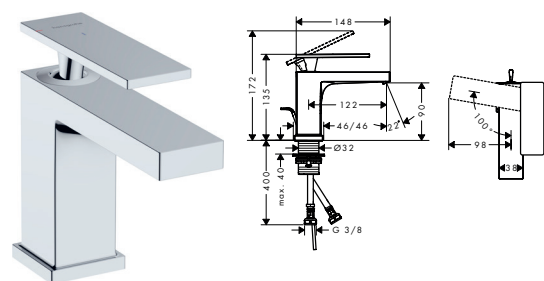

110

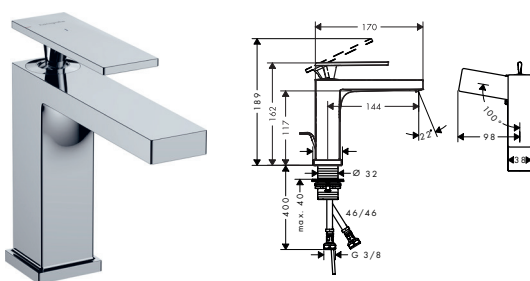

Sustainability



Technologies



Overview variants

ComfortZone	projection (mm)	spout height (mm)	waste set	CoolStart	finish	available from	code no.	
80	122	90	pop-up	■	● Chrome	NEW	Q3/2023	73002000
					● Brushed Bronze	NEW	Q3/2023	73002140
					● Matt Black	NEW	Q3/2023	73002670
					○ Matt White	NEW	Q3/2023	73002700
80	122	90	without	■	● Chrome	NEW	Q3/2023	73001000
					● Brushed Bronze	NEW	Q3/2023	73001140
					● Matt Black	NEW	Q3/2023	73001670
					○ Matt White	NEW	Q3/2023	73001700
110	144	117	pop-up	■	● Chrome	NEW	Q2/2023	73014000
					● Brushed Bronze	NEW	Q3/2023	73014140
					● Matt Black	NEW	Q2/2023	73014670
					○ Matt White	NEW	Q3/2023	73014700
110	144	117	without	■	● Chrome	NEW	Q3/2023	73012000
					● Brushed Bronze	NEW	Q3/2023	73012140
					● Matt Black	NEW	Q3/2023	73012670
					○ Matt White	NEW	Q3/2023	73012700
110	144	117	pop-up	-	● Chrome	NEW	Q3/2023	73010000
					● Brushed Bronze	NEW	Q3/2023	73010140
					● Matt Black	NEW	Q3/2023	73010670
					○ Matt White	NEW	Q3/2023	73010700
110	144	117	without	-	● Chrome	NEW	Q3/2023	73011000
					● Brushed Bronze	NEW	Q3/2023	73011140
					● Matt Black	NEW	Q3/2023	73011670
					○ Matt White	NEW	Q3/2023	73011700


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Tecturis E Single lever basin mixer 110 with bidette hand shower and shower hose 160 cm

Features

- consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose
- ComfortZone 110
- projection: 144 mm
- spout height: 117 mm
- spray type: WaterfallStream
- spray type Bidette: shower spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15
- non-return valve

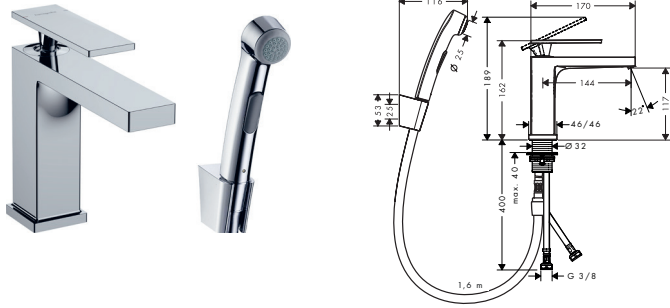

Sustainability



Technologies




finish		available from	code no.
Chrome	NEW	Q3/2023	73210000
Matt Black	NEW	Q3/2023	73210670

Tecturis E Pillar tap 80 with lever handle for cold water or pre-adjusted water without waste set

Features

- ComfortZone 80
- projection: 122 mm
- spout height: 90 mm
- spray type: WaterfallStream
- ceramic cartridge
- for cold water connection
- connection type: G 3/8 connections
- connection dimension: DN15

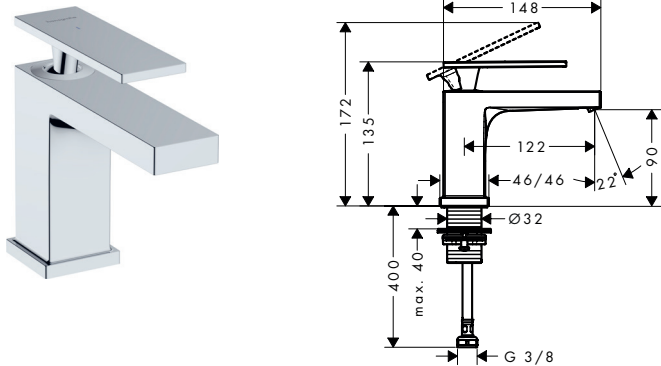

Sustainability



Technologies





finish		available from	code no.
Chrome	NEW	Q3/2023	73013000
Brushed Bronze	NEW	Q3/2023	73013140
Matt Black	NEW	Q3/2023	73013670
Matt White	NEW	Q3/2023	73013700

Tecturis E Single lever basin mixer for concealed installation wall-mounted with spout 22,5 cm

Features

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- projection: 225 mm
- spray type: WaterfallStream
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: basic set
- connection dimension: DN15
- handle can be positioned on the right or left, depending on the basic set installation

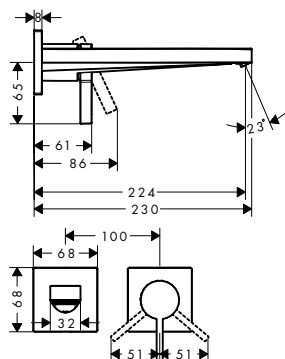

Sustainability



Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	73051000
Brushed Bronze	NEW	Q3/2023	73051140
Matt Black	NEW	Q3/2023	73051670
Matt White	NEW	Q3/2023	73051700


Required parts: code no.

- Basic set for single lever basin mixer for concealed installation wall-mounted 13622180

Basic set for single lever basin mixer for concealed installation wall-mounted

Features

- variable positioning of the mixer system, can be left or right of the spout
- easy orientation due to support surfaces for the spirit level
- with building protection cover against contamination during assembly
- with dimension indication for exact determination of the installation depth
- with pre-mounted fastening lugs for mounting in drywall and solidwall
- sound-decoupled installation
- connection dimension: DN15
- minimum mounting depth: 44 mm
- maximum mounting depth: 72 mm

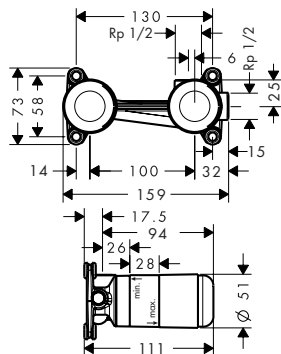


	code no.
	13622180

Tecturis E Single lever bidet mixer with pop-up waste set

Features

- consists of: single lever bidet mixer, waste set
- projection 149 mm
- spout height: 101 mm
- spray type: laminar spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 1 1/4
- material waste set: metal
- connection type: G 3/8 connections
- connection dimension: DN15




finish		available from	code no.
Chrome	NEW	Q3/2023	73200000
Brushed Bronze	NEW	Q3/2023	73200140
Matt Black	NEW	Q3/2023	73200670
Matt White	NEW	Q3/2023	73200700

Tecturis E Single lever bath mixer floor-standing

Features

- consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- 2 functions
- projection: 194 mm
- spray type mixer: WaterfallStream
- spray type hand shower: PowderRain
- ceramic cartridge
- pressure diverter Select with automatic resetting
- non-return valve
- connection dimension: DN15
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

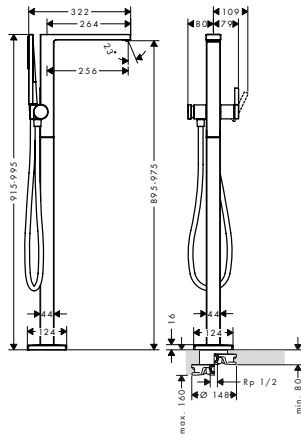

Technologies



finish		available from	code no.
Chrome	NEW	Q3/2023	73445000
Brushed Bronze	NEW	Q3/2023	73445140
Matt Black	NEW	Q3/2023	73445670
Matt White	NEW	Q3/2023	73445700

Required parts: code no.

	Basic set for mixers floor-standing	10452180
--	-------------------------------------	----------


Optional parts: code no.

	Sealing foil for basic set bath mixer floor-standing	96441000
--	--	----------

Basic set for mixers floor-standing

Features

- for mounting on unfinished floor
- suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- connection dimension: DN15
- minimum mounting depth: 53 mm
- maximum mounting depth: 133 mm



code no.

10452180

Optional parts:



Sealing foil for basic set bath mixer floor-standing



code no.

96441000

Tecturis E Single lever bath mixer for exposed installation

Features

- 2 functions
- projection: 213 mm
- centre distance: 150 ± 12 mm
- spray type mixer: WaterfallStream
- ceramic cartridge
- temperature limitation adjustable
- pressure diverter Select with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: s-shaped connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

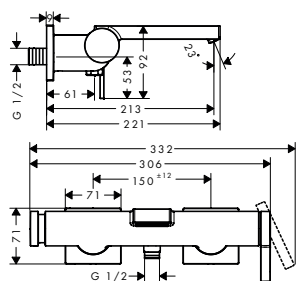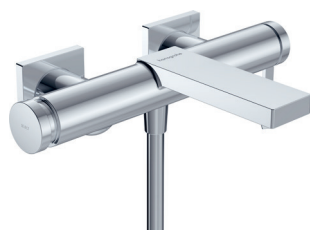

Technologies




finish		available from	code no.
Chrome	NEW	Q2/2023	73420000
Brushed Bronze	NEW	Q3/2023	73420140
Matt Black	NEW	Q2/2023	73420670
Matt White	NEW	Q3/2023	73420700

DuoTurn E Mixer for concealed installation for 2 functions

Features

- 2 functions
- volume control and diverter for 2 outlets
- maximum flow rate at 3 bar: 31 l/min
- flow rate of hand shower at 3 bar: 24 l/min
- ceramic cartridge for temperature control, shut-off/diverter valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub

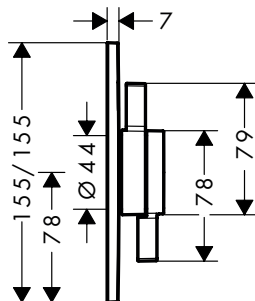

Sustainability



finish		available from	code no.
Chrome	NEW	Q3/2023	75417000
Brushed Bronze	NEW	Q3/2023	75417140
Matt Black	NEW	Q3/2023	75417670
Matt White	NEW	Q3/2023	75417700

Required parts:



iBox universal 2 Basic set

NEW

available from
Q3/2023

code no.
01500180

Optional parts:



Security combination according to EN 1717

NEW

available from
Q2/2023

code no.
13077000



ShowerSelect Comfort E Extension element 5 mm

finish

NEW

available from
Q3/2023

code no.

Chrome

NEW

Q3/2023

13612000

Brushed Bronze

NEW

Q3/2023

13612140

Matt Black

NEW

Q3/2023

13612670

Matt White

NEW

Q3/2023

13612700



ShowerSelect Comfort E Extension element 22 mm

finish

NEW

available from
Q3/2023

code no.

Chrome

NEW

Q3/2023

13617000

Brushed Bronze

NEW

Q3/2023

13617140

Matt Black

NEW

Q3/2023

13617670

Matt White

NEW

Q3/2023

13617700



DuoTurn Q Adapter for ShowerSelect Comfort extension element

NEW

Q3/2023

13628000



Extension iBox universal 2 basic set 2,5 cm

NEW


Q3/2023

13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

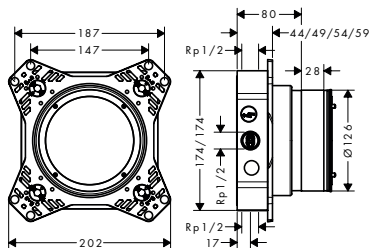

Technologies





Installation



	available from	code no.
NEW	Q3/2023	01500180


Optional parts:

	available from	code no.
 Adapter plate for iBox universal 2	NEW	Q3/2023 13588000
 Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023 13632000

Tecturis E Bath spout



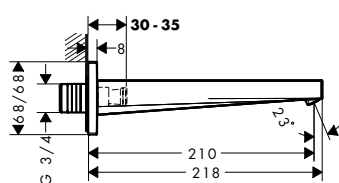

Features

- 1 function
- connection type: G 3/4
- projection 210 mm
- wall-mounted
- connection dimension: DN20
- spray type: WaterfallStream




Technologies



finish		available from	code no.
 Chrome	NEW	Q3/2023	73410000
 Brushed Bronze	NEW	Q3/2023	73410140
 Matt Black	NEW	Q3/2023	73410670
 Matt White	NEW	Q3/2023	73410700



Optional parts:

	code no.
 Socket for G1/2 connection	95626000

Tecturis E 3-hole rim mounted single lever bath mixer with sBox

Features

- consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder, shower hose, hose box
- 2 functions
- projection: 206 mm
- spray type mixer: WaterfallStream
- spray type hand shower: PowderRain
- maximum pull-out length of hand shower: 1.45 m
- sBox for quiet, smooth and protected hose guidance
- ceramic cartridge
- diverter with automatic resetting
- non-return valve
- protected against backflow, according to DIN EN 1717
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

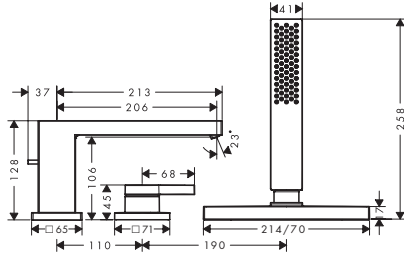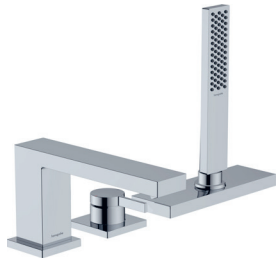

Technologies




finish		available from	code no.
Chrome	NEW	Q3/2023	73443000
Brushed Bronze	NEW	Q3/2023	73443140
Matt Black	NEW	Q3/2023	73443670
Matt White	NEW	Q3/2023	73443700

Required parts:		available from	code no.
Basic set for 3-hole rim mounted single lever bath mixer	NEW	Q3/2023	13481180

Basic set for 3-hole rim mounted single lever bath mixer

Features

- sBox for quiet, smooth and protected hose guidance
- drilling diameter: 35 mm, 50 mm
- clamping range: 0 - 30 mm
- maximum pull-out length of hand shower: 1,45 m
- suitable for suitable for installation on bath rim
- connection thread: G 1/2
- connection hose length: 600 mm
- connection dimension: DN15
- bath rim width at least 100 mm
- drilling diameter on bath tub: two drilled holes Ø 50/51 mm and connection by sawing out required (consider template)

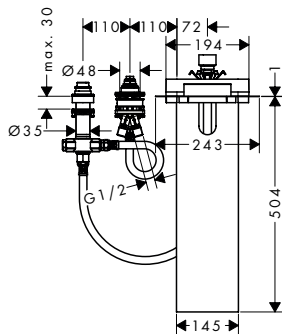






	NEW	available from	code no.
		Q3/2023	13481180

Tecturis E Single lever shower mixer for exposed installation

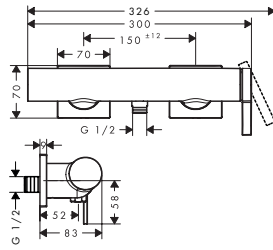Features

- 1 function
- centre distance: 150 ± 12 mm
- maximum flow rate at 3 bar: 12,3 l/min
- ceramic cartridge
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- hose connection DN15
- connection dimension: DN15
- connection type: s-shaped connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar




finish		available from	code no.
 Chrome	NEW	Q2/2023	73620000
 Brushed Bronze	NEW	Q3/2023	73620140
 Matt Black	NEW	Q2/2023	73620670
 Matt White	NEW	Q3/2023	73620700

DuoTurn E Mixer for concealed installation for 1 function

Features

- 1 function
- volume control for 1 outlet
- ceramic cartridge for temperature control, 1/2" ceramic shut-off valve
- flat escutcheon for more space in the shower
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- escutcheon can be aligned by +/- 3°
- material handles: metal
- connection type: basic set iBox universal 2
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- mixer is delivered with button On/Off

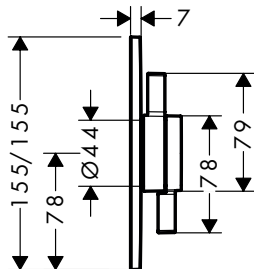

Sustainability



finish		available from	code no.
Chrome	NEW	Q3/2023	75617000
Brushed Bronze	NEW	Q3/2023	75617140
Matt Black	NEW	Q3/2023	75617670
Matt White	NEW	Q3/2023	75617700

Required parts:

	iBox universal 2 Basic set	NEW	available from	code no.
			Q3/2023	01500180


Optional parts:

		finish		available from	code no.
	ShowerSelect Comfort E Extension element 5 mm	Chrome	NEW	Q3/2023	13612000
		Brushed Bronze	NEW	Q3/2023	13612140
		Matt Black	NEW	Q3/2023	13612670
		Matt White	NEW	Q3/2023	13612700
	ShowerSelect Comfort E Extension element 22 mm	Chrome	NEW	Q3/2023	13617000
		Brushed Bronze	NEW	Q3/2023	13617140
		Matt Black	NEW	Q3/2023	13617670
		Matt White	NEW	Q3/2023	13617700
	DuoTurn Q Adapter for ShowerSelect Comfort extension element		NEW	Q3/2023	13628000
	Extension iBox universal 2 basic set 2,5 cm		NEW	Q3/2023	13632000

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm

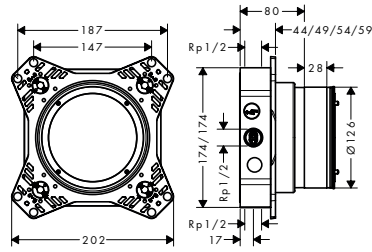

Technologies





Installation



	available from	code no.
NEW	Q3/2023	01500180

Optional parts:

	available from	code no.
 Adapter plate for iBox universal 2	NEW	Q3/2023 13588000
 Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023 13632000



Rebris

Rebris E Single lever basin mixers

Features of all variants

- spray type: normal spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15




80



110



240

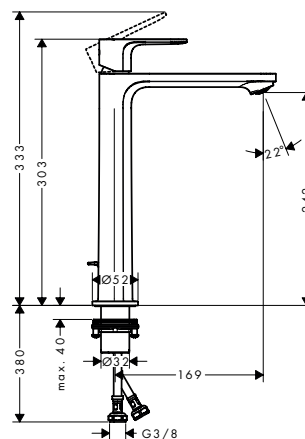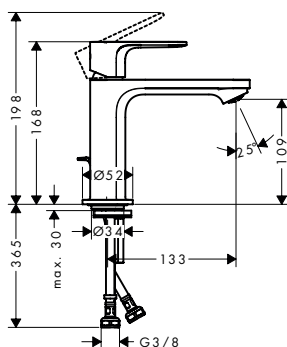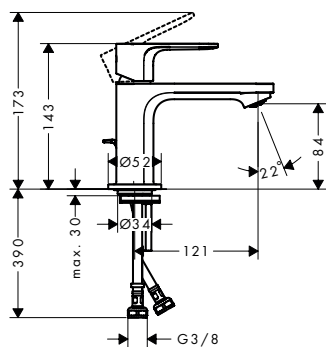

Sustainability

Technologies



Overview variants

Comfort-Zone	projec-tion (mm)	spout height (mm)	waste set	CoolStart	for wash bowls	max. flow rate at 3 bar (l/min)	finish	code no.
80	121	84	pop-up	■	-	5	● Chrome ● Matt Black	72553000 72553670
80	121	84	pop-up	■	-	4	● Chrome ● Matt Black	72587000 72587670
80	121	84	metal pop-up	■	-	5	● Chrome ● Matt Black	72585000 72585670
80	121	84	without	■	-	5	● Chrome ● Matt Black	72554000 72554670
80	121	84	pop-up	-	-	5	● Chrome	72550000
110	133	109	pop-up	■	-	5	● Chrome ● Matt Black	72559000 72559670
110	133	109	pop-up	■	-	4	● Chrome ● Matt Black	72589000 72589670
110	133	109	metal pop-up	■	-	5	● Chrome ● Matt Black	72551000 72551670
110	133	109	without	■	-	5	● Chrome ● Matt Black	72560000 72560670
110	133	109	pop-up	-	-	5	● Chrome ● Matt Black	72557000 72557670

Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.

Rebris E Single lever basin mixers**Overview variants**

Comfort-Zone	projection (mm)	spout height (mm)	waste set	CoolStart	for wash bowls	max. flow rate at 3 bar (l/min)	finish	code no.
240	169	242	pop-up	■	■	5	Chrome	72581000
							Matt Black	72581670
240	169	242	pop-up	■	■	4	Chrome	72591000
							Matt Black	72591670
240	169	242	without	■	■	5	Chrome	72583000

Rebris E Single lever basin mixer 110 with bidette hand shower and shower hose 160 cm without waste set**Features**


- consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose
- ComfortZone 110
- projection: 133 mm
- spout height: 109 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 4,7 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15

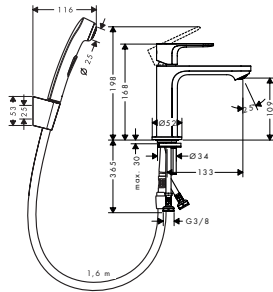**Sustainability****Technologies**

finish	code no.
Chrome	72216000

Rebris E Single lever basin mixer 210 with swivel spout and pop-up waste set**Features**

- consists of: single lever basin mixer, waste set
- ComfortZone 210
- projection: 154 mm
- spout height: 222 mm
- swivel range 120°
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 1 1/4
- material waste set: synthetic
- connection type: G 3/8 connections
- connection dimension: DN15

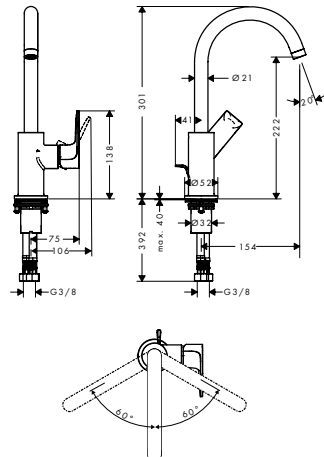**Sustainability****Technologies**


finish	code no.
Chrome	72576000
Matt Black	72576670

Rebris E | Pillar tap, Single lever basin mixer for concealed installation wall-mounted

Rebris E Pillar tap 80 with lever handle for cold water or pre-adjusted water without waste set

Features

- ComfortZone 80
- projection: 121 mm
- spout height: 84 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- for cold water connection
- connection type: G 3/8 connection hose
- connection dimension: DN 15

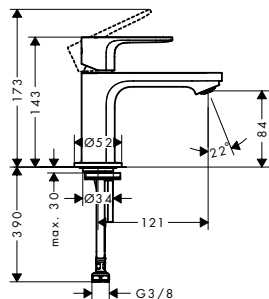

Sustainability



Technologies





finish	code no.
● Chrome	72506000
● Matt Black	72506670

Rebris E Single lever basin mixer for concealed installation wall-mounted with spout 20 cm

Features

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- projection: 200 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: basic set
- connection dimension: DN 15
- handle can be positioned on the right or left, depending on the basic set installation

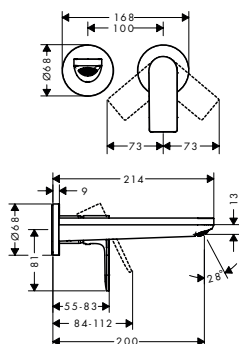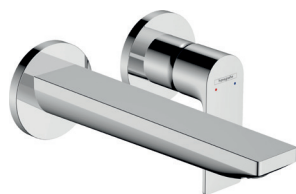

Sustainability



Technologies



finish	code no.
● Chrome	72568000
● Matt Black	72568670

! Required parts:



Basic set for single lever basin mixer for concealed installation wall-mounted


code no.

13622180

Rebris E Single lever bidet mixers

Features of all variants

- consists of: single lever bidet mixer, waste set
- projection 120 mm
- spout height: 89 mm
- aerator with ball pivot
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- suitable for continuous flow water heaters
- pop-up waste set G 1¼
- connection type: G ¾ connections
- connection dimension: DN15

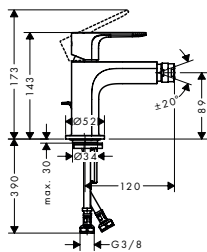

Sustainability



Technologies





Overview variants

waste set	finish	code no.
pop-up	● Chrome	72211000
	● Matt Black	72211670
metal pop-up	● Chrome	72213000
	● Matt Black	72213670

Rebris E Single lever bath mixers

Features of all variants

- 2 functions
- spray type mixer: normal spray
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- with silencer
- suitable for continuous flow water heaters
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

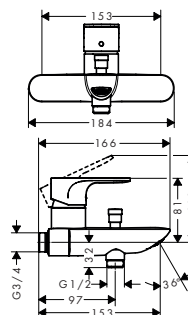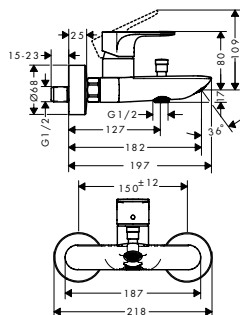

Technologies




Overview variants

centre distance (mm)	finish	code no.
150 ± 12	● Chrome	72450000
	● Matt Black	72450670
153	● Chrome	72452000

Rebris E Single lever bath mixers for concealed installation for iBox universal

Features of all variants

- 2 functions
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- non-return valve
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

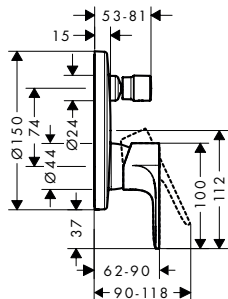

Overview variants

security combination EN 1717	max. flow rate at 3 bar (l/min)	finish	code no.
-	27.6	<ul style="list-style-type: none"> ● Chrome ● Matt Black 	<ul style="list-style-type: none"> 72468000 72468670
■	25.6	<ul style="list-style-type: none"> ● Chrome ● Matt Black 	<ul style="list-style-type: none"> 72469000 72469670

Required parts: For code no.

 iBox universal Basic set	01800180
---	----------


Optional parts: finish code no.

 Extension element 15 cm	<ul style="list-style-type: none"> ● Chrome ● Matt Black 	<ul style="list-style-type: none"> 13597000 13597670
---	--	--

Rebris E Single lever bath mixer for concealed installation

Features

- 2 functions
- maximum flow rate at 3 bar: 30,7 l/min
- flow rate for bath spout at 3 bar: 30,7 l/min
- flow rate of hand shower at 3 bar: 27,4 l/min
- diverter with automatic resetting
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

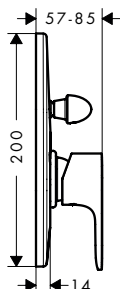

finish	code no.
● Chrome	72459000
● Matt Black	72459670


Required parts: code no.

 Basic set for single lever bath mixer for concealed installation	31741180
--	----------

Rebris E Single lever bath mixer set for concealed installation

Features

- consists of: single lever bath mixer, basic set
- 2 functions
- maximum flow rate at 3 bar: 30,7 l/min
- flow rate for bath spout at 3 bar: 30,7 l/min
- flow rate of hand shower at 3 bar: 27,4 l/min
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar


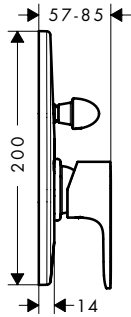


finish	code no.
● Chrome	72458000
● Matt Black	72458670

Rebris E Bath spout

Features

- connection type: G 1/2
- with escutcheon
- projection 200 mm
- wall-mounted
- maximum flow rate at 3 bar: 22 l/min
- spray type: normal spray

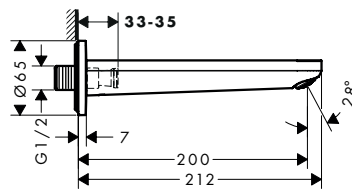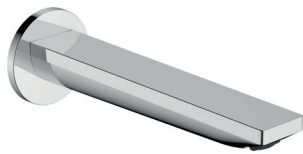

Technologies



finish	code no.
● Chrome	72431000
● Matt Black	72431670


Optional parts:

	code no.
Connection nipple DN20 (G3/4)	97846000

Rebris E Single lever bath and shower mixer Monotrou with 2 flow rates

Features

- 2 functions
- projection: 140 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 18,7 l/min
- flow rate for bath spout at 3 bar: 18,7 l/min
- flow rate of hand shower at 3 bar: 13,6 l/min
- ceramic cartridge with Eco handle position for 2 flow rates
- temperature limitation adjustable
- diverter with automatic resetting
- protected against backflow, according to DIN EN 1717
- connection dimension: DN15
- connection type: G 3/8 connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

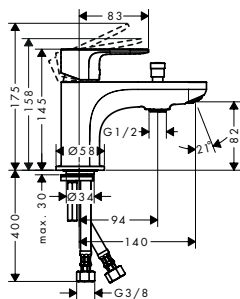

Technologies




finish	code no.
● Chrome	72437000

Rebris E Single lever bath mixer Monotrou

Features

- 1 function
- projection: 140 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 19,9 l/min
- flow rate for bath spout at 3 bar: 19,9 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection type: G 3/8 connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

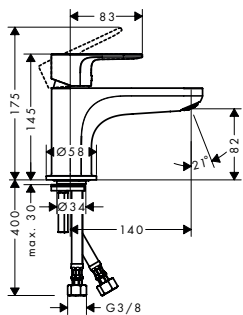

Technologies





finish	code no.
● Chrome	72435000

Rebris E Single lever shower mixers for exposed installation

Features of all variants

- 1 function
- ceramic cartridge
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection DN15
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

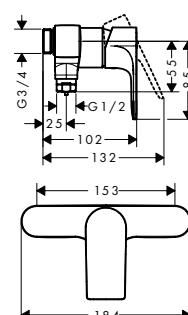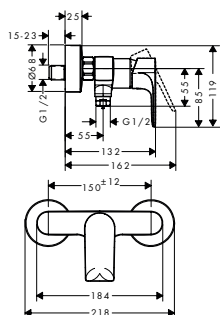


Overview variants

centre distance (mm)	finish	code no.
150 ± 12	● Chrome	72650000
	● Matt Black	72650670
153	● Chrome	72652000

Rebris E Single lever shower mixer for concealed installation for iBox universal**Features**

- 1 function
- maximum flow rate at 3 bar: 23,4 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

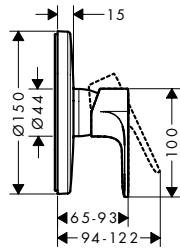

finish	code no.
Chrome	72668000
Matt Black	72668670

Required parts: code no.

iBox universal Basic set

01800180


Optional parts: code no.

Extension element 15 cm

finish	code no.
Chrome	13597000
Matt Black	13597670

Rebris E Single lever shower mixer for concealed installation**Features**

- 1 function
- maximum flow rate at 3 bar: 28,7 l/min
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

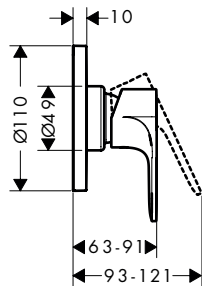

finish	code no.
Chrome	72659000
Matt Black	72659670

Required parts: code no.


Basic set for single lever shower mixer for concealed installation

13620180

Rebris E Single lever shower mixer set for concealed installation

Features

- consists of: single lever shower mixer, basic set
- 1 function
- maximum flow rate at 3 bar: 28,7 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar




finish	code no.
● Chrome	72658000
● Matt Black	72658670

Rebris S Single lever basin mixers


Features of all variants

- spray type: normal spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15


80

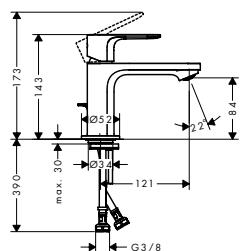

110

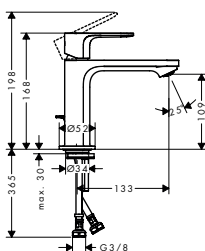

240

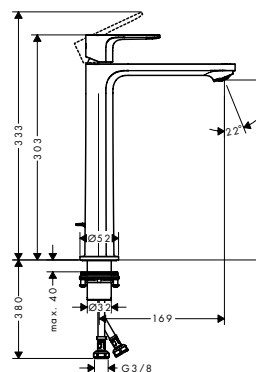

Sustainability



Technologies

Overview variants

Comfort-Zone	projection (mm)	spout height (mm)	waste set	CoolStart	for wash bowls	max. flow rate at 3 bar (l/min)	finish	code no.
80	121	84	pop-up	■	-	5	● Chrome	72513000
							● Matt Black	72513670
80	121	84	pop-up	■	-	4	● Chrome	72586000
							● Matt Black	72586670
80	121	84	metal pop-up	■	-	5	● Chrome	72584000
							● Matt Black	72584670
80	121	84	without	■	-	5	● Chrome	72514000
80	121	84	pop-up	-	-	5	● Chrome	72510000
110	133	109	pop-up	■	-	5	● Chrome	72519000
							● Matt Black	72519670
110	133	109	pop-up	■	-	4	● Chrome	72588000
							● Matt Black	72588670
110	133	109	metal pop-up	■	-	5	● Chrome	72527000
							● Matt Black	72527670
110	133	109	without	■	-	5	● Chrome	72520000
							● Matt Black	72520670
110	133	109	pop-up	-	-	5	● Chrome	72517000
							● Matt Black	72517670

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Rebris S Single lever basin mixers


Overview variants

Comfort-Zone	projection (mm)	spout height (mm)	waste set	CoolStart	for wash bowls	max. flow rate at 3 bar (l/min)	finish	code no.
240	169	242	pop-up	■	■	5	Chrome	72580000
							Matt Black	72580670
240	169	242	pop-up	■	■	4	Chrome	72590000
							Matt Black	72590670
240	169	242	without	■	■	5	Chrome	72582000

Rebris S Single lever basin mixer 110 with bidette hand shower and shower hose 160 cm without waste set

Features

- consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose
- ComfortZone 110
- projection: 133 mm
- spout height: 109 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 4,7 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15



Sustainability



Technologies




finish	code no.
Chrome	72215000
Matt Black	72215670

Rebris S Single lever basin mixer 210 with swivel spout and pop-up waste set

Features

- consists of: single lever basin mixer, waste set
- ComfortZone 210
- projection: 154 mm
- spout height: 222 mm
- swivel range 120°
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 1 1/4
- material waste set: synthetic
- connection type: G 3/8 connections
- connection dimension: DN15

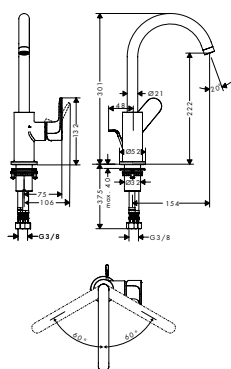

Sustainability



Technologies




finish	code no.
Chrome	72536000
Matt Black	72536670

Rebris S Pillar tap 80 with lever handle for cold water or pre-adjusted water without waste set

Features

- ComfortZone 80
- projection: 121 mm
- spout height: 84 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- for cold water connection
- connection type: G 3/8 connection hose
- connection dimension: DN 15

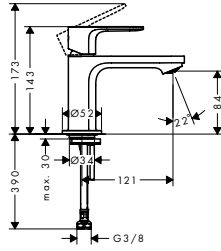

Sustainability



Technologies




finish	code no.
● Chrome	72503000
● Matt Black	72503670

Rebris S 3-hole basin mixer 110 with pop-up waste set

Features

- consists of: 3-hole basin mixer, waste set
- ComfortZone 110
- projection: 134 mm
- spout height: 107 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic valves hot/ cold 90°
- suitable for continuous flow water heaters
- pop-up waste set G 1 1/4
- material waste set: synthetic
- connection type: G 3/8 connections
- connection dimension: DN 15

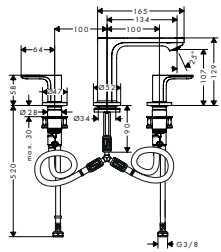

Sustainability



Technologies





finish	code no.
● Chrome	72530000

Rebris S Single lever basin mixer for concealed installation wall-mounted with spout 20 cm

Features

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- projection: 200 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: basic set
- connection dimension: DN 15
- handle can be positioned on the right or left, depending on the basic set installation

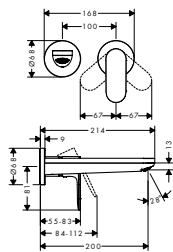

Sustainability



Technologies



finish	code no.
● Chrome	72528000
● Matt Black	72528670

Rebris S Single lever basin mixer for concealed installation wall-mounted with spout 20 cm

Required parts:


code no.

	Basic set for single lever basin mixer for concealed installation wall-mounted	13622180
--	--	----------

Rebris S Single lever bidet mixers

Features of all variants

- consists of: single lever bidet mixer, waste set
- projection 120 mm
- spout height: 89 mm
- aerator with ball pivot
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 1 1/4
- connection type: G 3/8 connections
- connection dimension: DN15



Sustainability



Technologies





Overview variants

waste set	finish	code no.
pop-up	● Chrome	72210000
	● Matt Black	72210670
metal pop-up	● Chrome	72212000
	● Matt Black	72212670

Rebris S Single lever bath mixers for exposed installation**Features of all variants**


- 2 functions
- projection: 173 mm
- spray type mixer: normal spray
- ceramic cartridge
- diverter with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

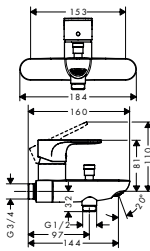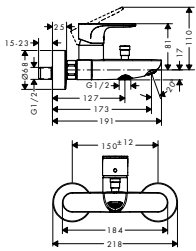**Technologies****Overview variants**

centre distance (mm)	finish	code no.
150 ± 12	<ul style="list-style-type: none"> ● Chrome ● Matt Black 	<ul style="list-style-type: none"> 72440000 72440670
153	<ul style="list-style-type: none"> ● Chrome 	<ul style="list-style-type: none"> 72442000

Rebris S Single lever bath mixer for exposed installation with 2 flow rates**Features**

- 2 functions
- projection: 173 mm
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 19,5 l/min
- flow rate for bath spout at 3 bar: 19,5 l/min
- flow rate of hand shower at 3 bar: 14,8 l/min
- ceramic cartridge
- diverter with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN 15
- connection type: s-shaped connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar


**Technologies**

finish	code no.
<ul style="list-style-type: none"> ● Chrome ● Matt Black 	<ul style="list-style-type: none"> 72443000 72443670

Rebris S Single lever bath mixers for concealed installation for iBox universal

Features of all variants

- 2 functions
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- with silencer
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

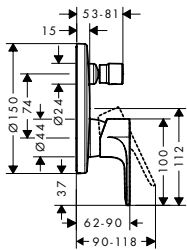

Overview variants

security combination EN 1717	max. flow rate at 3 bar (l/min)	finish	code no.
-	27.6	<ul style="list-style-type: none"> Chrome Matt Black 	<ul style="list-style-type: none"> 72466000 72466670
■	25.6	<ul style="list-style-type: none"> Chrome Matt Black 	<ul style="list-style-type: none"> 72467000 72467670

Required parts: For code no.

 iBox universal Basic set	01800180
---	----------


Optional parts: finish code no.

 Extension element 15 cm	<ul style="list-style-type: none"> Chrome Matt Black 	<ul style="list-style-type: none"> 13597000 13597670
---	--	--

Rebris S Single lever bath mixer for concealed installation

Features

- 2 functions
- maximum flow rate at 3 bar: 30,7 l/min
- flow rate for bath spout at 3 bar: 30,7 l/min
- flow rate of hand shower at 3 bar: 27,4 l/min
- diverter with automatic resetting
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar



finish	code no.
Chrome	72449000
Matt Black	72449670


Required parts: code no.

 Basic set for single lever bath mixer for concealed installation	31741180
--	----------

Rebris S Single lever bath mixer set for concealed installation

Features

- consists of: single lever bath mixer, basic set
- 2 functions
- maximum flow rate at 3 bar: 30,7 l/min
- flow rate for bath spout at 3 bar: 30,7 l/min
- flow rate of hand shower at 3 bar: 27,4 l/min
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar


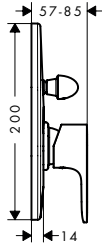


finish	code no.
● Chrome	72448000
● Matt Black	72448670

Rebris S Bath spout

Features

- connection type: G 1/2
- with escutcheon
- projection 200 mm
- wall-mounted
- maximum flow rate at 3 bar: 22 l/min
- spray type: normal spray



Technologies




finish	code no.
● Chrome	72430000
● Matt Black	72430670

Rebris S Single lever bath and shower mixer Monotrou with 2 flow rates

Features

- 2 functions
- projection: 140 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 18,7 l/min
- flow rate for bath spout at 3 bar: 18,7 l/min
- flow rate of hand shower at 3 bar: 13,6 l/min
- ceramic cartridge with Eco handle position for 2 flow rates
- temperature limitation adjustable
- diverter with automatic resetting
- protected against backflow, according to DIN EN 1717
- connection dimension: DN15
- connection type: G 3/8 connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

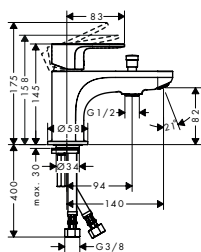

Technologies




finish	code no.
● Chrome	72436000

Rebris S Single lever bath mixer Monotrou

Features

- 1 function
- projection: 140 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 19,9 l/min
- flow rate for bath spout at 3 bar: 19,9 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection type: G 3/8 connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

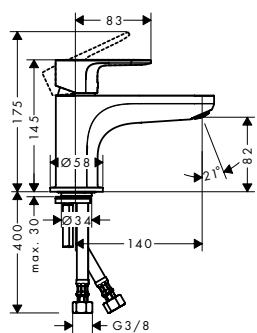

Technologies





finish	code no.
Chrome	72434000

Rebris S Single lever shower mixers for exposed installation

Features of all variants

- 1 function
- ceramic cartridge
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection DN15
- connection dimension: DN15
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

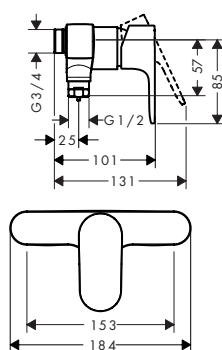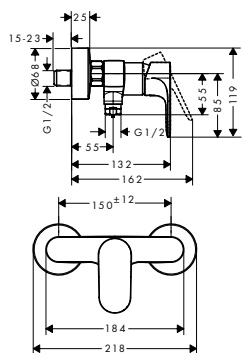


Overview variants

centre distance (mm)	finish	code no.
150 ± 12	Chrome	72640000
	Mat Black	72640670
153	Chrome	72642000

Rebris S Single lever shower mixer for exposed installation with 2 flow rates**Features**


- 1 function
- centre distance: 150 ± 12 mm
- maximum flow rate at 3 bar: 18,3 l/min
- flow rate of hand shower at 3 bar: 18,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection DN15
- connection dimension: DN15
- connection type: s-shaped connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

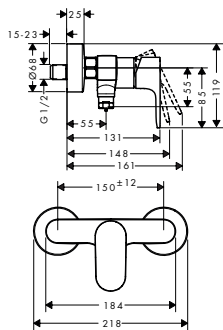

finish	code no.
● Chrome	72643000
● Matt Black	72643670

Rebris S Single lever shower mixer for concealed installation for iBox universal**Features**

- 1 function
- maximum flow rate at 3 bar: 23,4 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

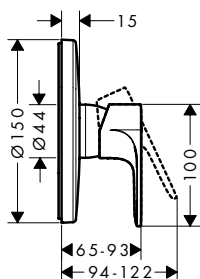

finish	code no.
● Chrome	72667000
● Matt Black	72667670

Required parts:

iBox universal Basic set

code no.

01800180

Optional parts:

Extension element 15 cm

finish

code no.

● Chrome

13597000


● Matt Black

13597670

Rebris S Single lever shower mixer for concealed installation

Features

- 1 function
- maximum flow rate at 3 bar: 28,7 l/min
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

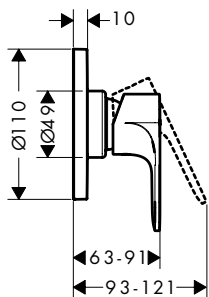

finish	code no.
● Chrome	72649000
● Matt Black	72649670

! Required parts: code no.



Basic set for single lever shower mixer for concealed installation

13620180




Logis

Logis Single lever basin mixers


Features of all variants

- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15


70

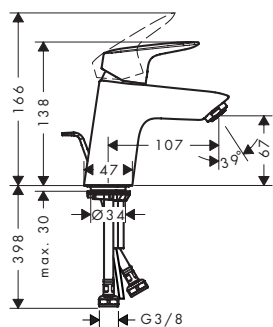

100

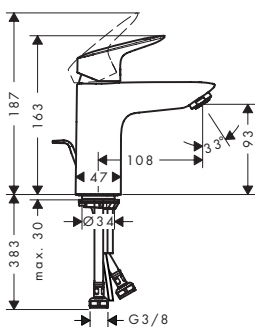

190

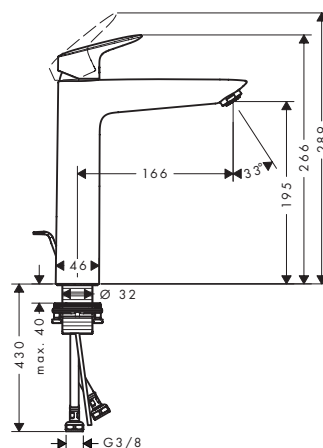

Sustainability



Technologies




Overview variants

ComfortZone	projection (mm)	spout height (mm)	waste set	CoolStart	finish	available from	code no.
70	107	67	pop-up	■	● Matt Black	NEW Q2/2023	71072670
70	107	67	without	■	● Matt Black	NEW Q2/2023	71073670
70	107	67	pop-up	-	● Matt Black	NEW Q2/2023	71070670
70	107	67	metal pop-up	-	● Matt Black	NEW Q2/2023	71170670
70	107	67	push-open	-	● Matt Black	NEW Q2/2023	71077670
70	107	67	without	-	● Matt Black	NEW Q2/2023	71071670
100	108	93	pop-up	■	● Matt Black	NEW Q2/2023	71102670
100	108	93	without	■	● Matt Black	NEW Q2/2023	71103670
100	108	93	pop-up	-	● Matt Black	NEW Q2/2023	71100670
100	108	93	metal pop-up	-	● Matt Black	NEW Q2/2023	71171670
100	108	93	push-open	-	● Matt Black	NEW Q2/2023	71107670
100	108	93	without	-	● Matt Black	NEW Q2/2023	71101670
190	166	195	pop-up	-	● Matt Black	NEW Q2/2023	71090670
190	166	195	without	-	● Matt Black	NEW Q2/2023	71091670

Logis Single lever basin mixers with swivel spout

Features of all variants

- ComfortZone 210
- projection: 154 mm
- spout height: 221 mm
- swivel range 120°
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8 connections
- connection dimension: DN15
- handle position on the side: bottom-side at the base body (not suitable for wash bowls)

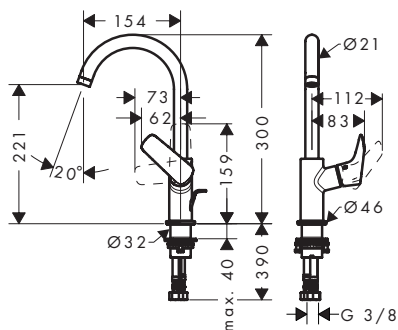

Sustainability



Technologies




Overview variants

waste set	finish	available from	code no.
pop-up	● Matt Black NEW	Q2/2023	71130670
without	● Matt Black NEW	Q2/2023	71131670

Logis Single lever basin mixer for concealed installation wall-mounted with spout 19,5 cm

Features

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- projection: 195 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: basic set
- connection dimension: DN15
- handle can be positioned on the right or left, depending on the basic set installation

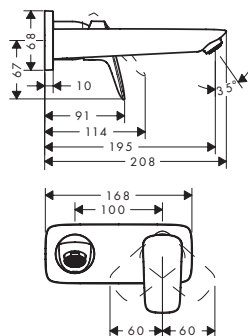

Sustainability



Technologies



finish	available from	code no.
● Matt Black NEW	Q2/2023	71220670

Required parts:


	Basic set for single lever basin mixer for concealed installation wall-mounted	code no. 13622180
--	--	----------------------

Logis Single lever basin mixers Fine


Features of all variants

- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection type: G 3/8
- connection dimension: DN15

110

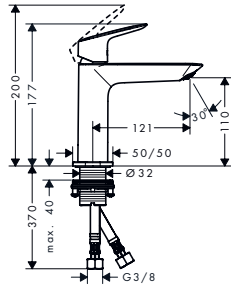

240

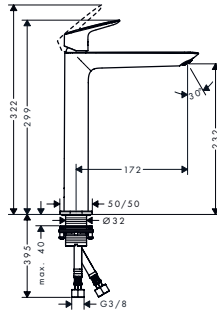

Sustainability



Technologies




Overview variants

Comfort-Zone	projection (mm)	spout height (mm)	waste set	CoolStart	for wash bowls	finish	available from	code no.
110	121	110	pop-up	■	-	● Matt Black	NEW	Q2/2023 71254670
110	121	110	without	■	-	● Matt Black	NEW	Q2/2023 71255670
110	121	110	pop-up	-	-	● Matt Black	NEW	Q2/2023 71251670
110	121	110	push-open	-	-	● Matt Black	NEW	Q2/2023 71252670
110	121	110	without	-	-	● Matt Black	NEW	Q2/2023 71253670
240	172	232	pop-up	-	■	● Matt Black	NEW	Q2/2023 71257670
240	172	232	without	-	■	● Matt Black	NEW	Q2/2023 71258670

Logis Single lever basin mixer for concealed installation Fine wall-mounted with spout 20,6 cm

Features

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- projection: 206 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: basic set
- connection dimension: DN15
- handle can be positioned on the right or left, depending on the basic set installation

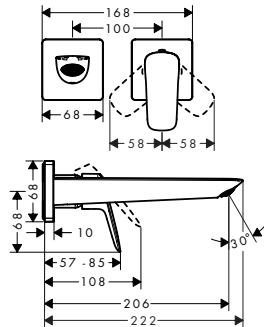

Sustainability



Technologies



finish	available from	code no.
● Matt Black	NEW	Q2/2023 71256670

Required parts:



Basic set for single lever basin mixer for concealed installation wall-mounted


code no.

13622180

Logis Pillar tap 70 for cold water or pre-adjusted water without waste set

Features

- ComfortZone 70
- projection: 84 mm
- spout height: 79 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic valves 90°
- for cold water connection
- connection type: G 3/8 connection hose
- connection dimension: DN15

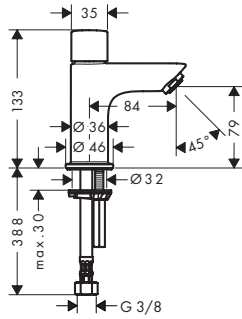

Sustainability



Technologies




finish	available from	code no.
● Matt Black	NEW	Q2/2023 71120670

Logis Single lever bidet mixers


Features of all variants

- consists of: single lever bidet mixer, waste set
- projection 119 mm
- aerator with ball pivot
- spray type: normal spray
- maximum flow rate at 3 bar: 7,2 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 1 1/4
- material waste set: synthetic
- connection type: G 3/8 connections
- connection dimension: DN15

70

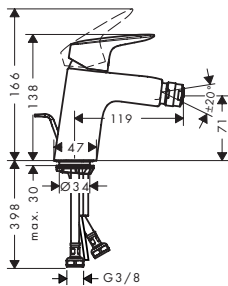

100

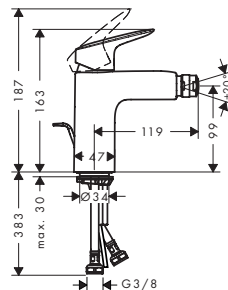

Technologies




Overview variants

ComfortZone	projection (mm)	spout height (mm)	waste set	finish	available from	code no.
70	119	71	pop-up	● Matt Black	NEW	Q2/2023 71204670
100	119	99	pop-up	● Matt Black	NEW	Q2/2023 71200670

Logis Single lever bidet mixer 110 Fine with pop-up waste set

Features

- consists of: single lever bidet mixer, waste set
- projection 112 mm
- spout height: 102 mm
- aerator with ball pivot
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- material waste set: synthetic
- connection type: G 3/8 connections
- connection dimension: DN15

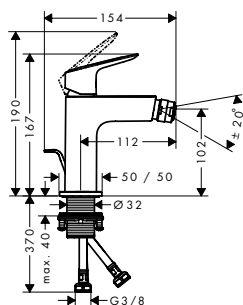

Technologies




finish	available from	code no.
● Matt Black	NEW	Q2/2023 71201670

Logis Single lever bath mixer for exposed installation

Features

- 2 functions
- projection: 194 mm
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 20 l/min
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 17 l/min
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: s-shaped connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

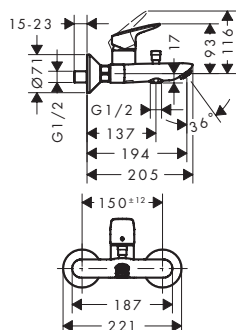

Technologies




finish	available from	code no.
● Matt Black	NEW	Q2/2023 71400670

Logis Single lever bath mixer for exposed installation with 2 flow rates

Features

- 2 functions
- projection: 194 mm
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 22 l/min
- ceramic cartridge with Eco handle position for 2 flow rates
- temperature limitation adjustable
- diverter with automatic resetting
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: s-shaped connections

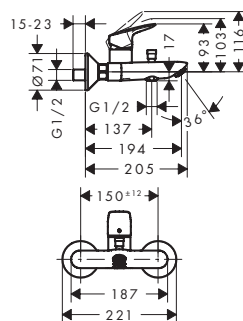

Technologies




finish	available from	code no.
● Matt Black	NEW	Q2/2023 71401670

Logis Single lever bath mixers for concealed installation for iBox universal

Features of all variants

- 2 functions
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- connection type: basic set
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

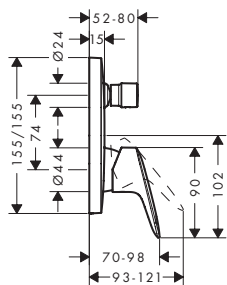

Overview variants

security combination EN 1717	max. flow rate at 3 bar (l/min)	finish	available from	code no.
-	29	● Matt Black	NEW	Q2/2023 71405670
■	25.6	● Matt Black	NEW	Q2/2023 71407670

Required parts:



iBox universal Basic set


code no.

01800180

Logis Bath spout

Features

- 1 function
- connection type: G 3/4
- with escutcheon
- projection 195 mm
- wall-mounted
- maximum flow rate at 3 bar: 21 l/min
- connection dimension: DN20
- spray type: normal spray

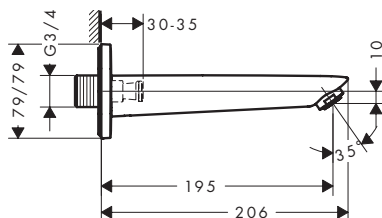

Technologies



finish	available from	code no.
● Matt Black	NEW	Q2/2023 71410670

Optional parts:



Socket for G1/2 connection


code no.

95626000

Logis Single lever bath and shower mixer Monotrou with 2 flow rates

Features

- 2 functions
- projection: 145 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 20,5 l/min
- flow rate for bath spout at 3 bar: 20,5 l/min
- flow rate of hand shower at 3 bar: 14,9 l/min
- ceramic cartridge with Eco handle position for 2 flow rates
- temperature limitation adjustable
- diverter with automatic resetting
- non-return valve
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: G 3/8 connections
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

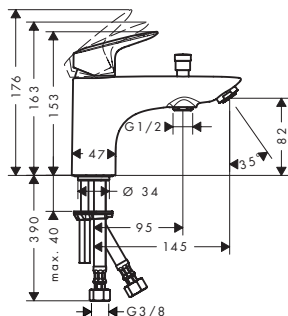

Technologies




finish	available from	code no.
● Matt Black	NEW	Q2/2023 71315670

Logis Single lever shower mixer for exposed installation

Features

- 1 function
- centre distance: 150 ± 12 mm
- maximum flow rate at 3 bar: 28 l/min
- flow rate of hand shower at 3 bar: 17 l/min
- ceramic cartridge
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection DN15
- connection dimension: DN15
- connection type: s-shaped connections

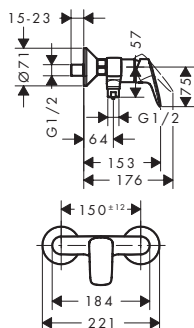


finish	available from	code no.
● Matt Black	NEW	Q2/2023 71600670

Logis Single lever shower mixer for exposed installation with 2 flow rates

Features


- 1 function
- centre distance: 150 ± 12 mm
- maximum flow rate at 3 bar: 12,4 l/min
- flow rate of hand shower at 3 bar: 12,4 l/min
- ceramic cartridge with Eco handle position for a reduced flowrate by up to 50%
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection DN15
- connection dimension: DN15
- connection type: s-shaped connections

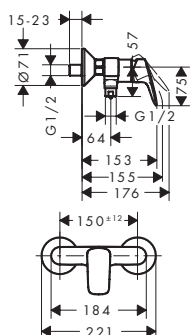

finish	available from	code no.
● Matt Black	NEW	Q2/2023 71601670

Logis Single lever shower mixer for concealed installation for iBox universal**Features**

- 1 function
- maximum flow rate at 3 bar: 29,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection type: basic set

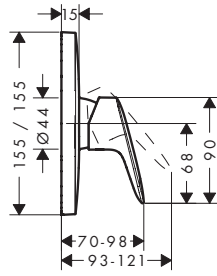

finish	available from	code no.
● Matt Black	NEW	Q2/2023 71605670

Required parts:

iBox universal Basic set

code no.

01800180




Pulsify

Pulsify E Baton hand showers 1 jet

Features of all variants

- shower head size: 100 x 25 mm
- spray type: PowderRain
- with internal water conduction
- rinseable sieve insert
- connection thread G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

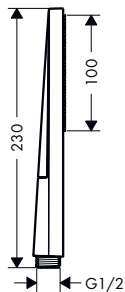

Sustainability



Technologies



Spray types



Overview variants


	max. flow rate at 3 bar (l/min)	finish		available from	code no.
🌿	8	🌿 Chrome	NEW	Q2/2023	24320000
		🌿 Brushed Bronze	NEW	Q2/2023	24320140
		🌿 Matt Black	NEW	Q2/2023	24320670
		🌿 Matt White	NEW	Q2/2023	24320700
🌿	5	🌿 Chrome	NEW	Q2/2023	24321000
		🌿 Brushed Bronze	NEW	Q2/2023	24321140
		🌿 Matt Black	NEW	Q2/2023	24321670
		🌿 Matt White	NEW	Q2/2023	24321700

Pulsify E Shower sets 1jet


Features of all variants

- consists of: baton hand shower, shower bar, shower hose, slider
- shower head size: 100 x 25 mm
- spray type: PowderRain
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- wall mounting: screw fastening
- wall supports made of plastic
- wall bar type: swivelling shower bar
- hand shower holder for right- and left-hand installation
- metal hand shower holder
- profile pipe: cubic

950 mm

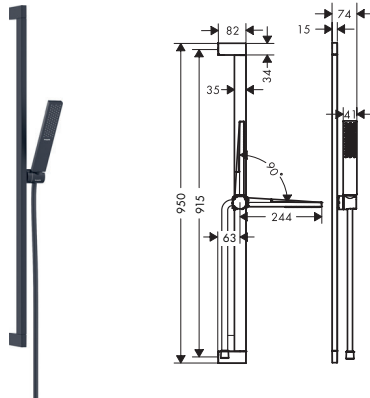

663 mm

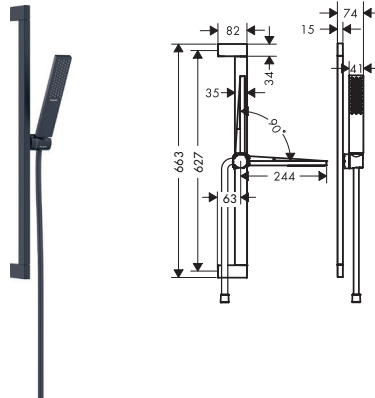

Sustainability



Technologies



Spray types





Overview variants

	length shower bar (mm)	max. flow rate at 3 bar (l/min)	min. flow pressure (bar)	finish		available from	code no.
🌿	950	5	0.9	● Chrome	NEW	Q2/2023	24381000
				● Matt Black	NEW	Q2/2023	24381670
				○ Matt White	NEW	Q2/2023	24381700
🌿	950	8	0.8	● Chrome	NEW	Q2/2023	24380000
				● Matt Black	NEW	Q2/2023	24380670
				○ Matt White	NEW	Q2/2023	24380700
🌿	663	5	0.9	● Chrome	NEW	Q2/2023	24371000
				● Matt Black	NEW	Q2/2023	24371670
				○ Matt White	NEW	Q2/2023	24371700
🌿	663	8	0.8	● Chrome	NEW	Q2/2023	24370000
				● Matt Black	NEW	Q2/2023	24370670
				○ Matt White	NEW	Q2/2023	24370700

Pulsify E Overhead showers 1 jet

Features of all variants

- shower head size: 260 x 260 mm
- spray type: PowderRain
- Fast Drain empties the overhead shower from an angle of 10°
- material spray disc: plastic
- spray disc surface: graphite
- installation: ceiling or wall
- connection thread G 1/2
- suitable for continuous flow water heaters

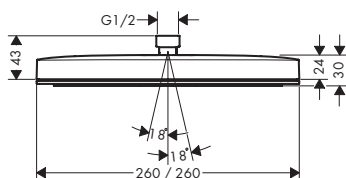

Sustainability



Technologies



Spray types



Overview variants


	max. flow rate at 3 bar (l/min)	min. flow pressure (bar)	finish		available from	code no.
	8.4	0.8	Chrome	NEW	Q2/2023	24331000
			Brushed Bronze	NEW	Q2/2023	24331140
			Matt Black	NEW	Q2/2023	24331670
			Matt White	NEW	Q2/2023	24331700
	5.5	0.9	Chrome	NEW	Q2/2023	24333000
			Brushed Bronze	NEW	Q2/2023	24333140
			Matt Black	NEW	Q2/2023	24333670
			Matt White	NEW	Q2/2023	24333700
	11.7	0.9	Chrome	NEW	Q2/2023	24330000
			Brushed Bronze	NEW	Q2/2023	24330140
			Matt Black	NEW	Q2/2023	24330670
			Matt White	NEW	Q2/2023	24330700

! Required parts (choose one)		finish		available from	code no.
	Shower arm E 39 cm	Chrome	NEW	Q2/2023	24337000
		Brushed Bronze	NEW	Q2/2023	24337140
		Matt Black	NEW	Q2/2023	24337670
		Matt White	NEW	Q2/2023	24337700
	Ceiling connector E 10 cm	Chrome	NEW	Q2/2023	24338000
		Brushed Bronze	NEW	Q2/2023	24338140
		Matt Black	NEW	Q2/2023	24338670
		Matt White	NEW	Q2/2023	24338700
	Ceiling connector E 30 cm	Chrome	NEW	Q2/2023	24339000
		Brushed Bronze	NEW	Q2/2023	24339140
		Matt Black	NEW	Q2/2023	24339670
		Matt White	NEW	Q2/2023	24339700

Pulsify E Overhead showers 2jet with wall connector

Features of all variants

- consists of: overhead shower, wall connector
- shower head size: 260 x 260 mm
- spray type: PowderRain, Intense PowderRain
- Fast Drain empties the overhead shower from an angle of 10°
- ball-joint: overhead shower angle adjustable
- material spray disc: plastic
- spray disc surface: graphite
- overhead shower removable for cleaning
- installation: wall-mounted - based on iBox
- connection type: basic set
- suitable for continuous flow water heaters

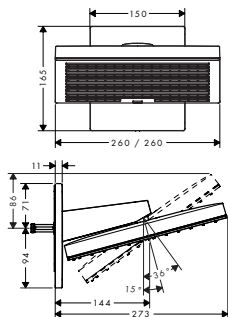

Sustainability



Technologies



Spray types



Overview variants


max. flow rate at 3 bar (l/min)	min. flow pressure (bar)	finish	available from	code no.	
10.8	1.3	● Chrome	NEW	Q2/2023	24351000
		● Matt Black	NEW	Q2/2023	24351670
		○ Matt White	NEW	Q2/2023	24351700
		● Chrome	NEW	Q2/2023	24350000
		● Matt Black	NEW	Q2/2023	24350670
		○ Matt White	NEW	Q2/2023	24350700

! Required parts (choose one)			available from	code no.
	iBox universal Basic set			01800180
	iBox universal 2 Basic set	NEW	Q3/2023	01500180
	Adapter plate for iBox universal 2	NEW	Q3/2023	13588000

iBox universal Basic set

Features

- suitable for all shower, bath tub and thermostat finish sets for concealed installation
- connection thread Rp 3/4
- connection dimension: DN20
- rotationally-symmetric installation
- sound-decoupled installation
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm


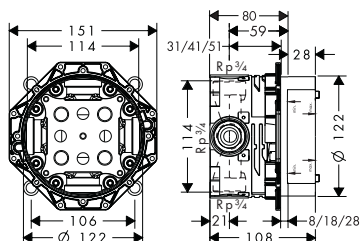


code no.
01800180

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation
- material: dezincification brass, EPP foam, heat and sound insulating
- connection thread Rp 1/2
- connection dimension: DN15
- rotationally-symmetric installation
- sound-decoupled installation
- flexible mounting ring for different mounting situations
- mounting ring adjustable in 5 mm steps
- mounting ring suitable for front and rear installation
- no shortening necessary thanks to sliding sleeve
- Support aid for the spirit level
- integrated spirit level for correct horizontal and vertical alignment
- sealing foil permanently fixed
- power supply: DN16 conduit
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm



Technologies





Installation



	available from	code no.
NEW	Q3/2023	01500180


Optional parts:

		available from	code no.
	Adapter plate for iBox universal 2	NEW	Q3/2023 13588000
	Extension iBox universal 2 basic set 2,5 cm	NEW	Q3/2023 13632000

Shower arm E 39 cm

Features

- length: 390 mm
- installation type: concealed installation
- material: brass/ plastic
- connection type: G 1/2



finish		available from	code no.
Chrome	NEW	Q2/2023	24337000
Brushed Bronze	NEW	Q2/2023	24337140
Matt Black	NEW	Q2/2023	24337670
Matt White	NEW	Q2/2023	24337700

Ceiling connectors E


Features of all variants

- installation type: concealed installation
- material: brass/ plastic
- connection type: G 1/2
- ceiling connector not extendable, ceiling connector not shortenable

300 mm



100 mm

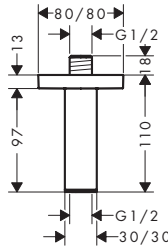

Overview variants

length (mm)	finish		available from	code no.
300	Chrome	NEW	Q2/2023	24339000
	Brushed Bronze	NEW	Q2/2023	24339140
	Matt Black	NEW	Q2/2023	24339670
	Matt White	NEW	Q2/2023	24339700
100	Chrome	NEW	Q2/2023	24338000
	Brushed Bronze	NEW	Q2/2023	24338140
	Matt Black	NEW	Q2/2023	24338670
	Matt White	NEW	Q2/2023	24338700

Unica Shower bars E Puro with easy slide hand shower holders

Features of all variants

- consists of: shower bar, slider, shower hose
- swivelling shower bar
- pivot connector prevents hose from tangling
- profile pipe: cubic
- hand shower holder for right- and left-hand installation, metal hand shower holder
- hand shower holder with locking mechanism
- slider steplessly adjustable
- wall supports made of plastic


950 mm



663 mm



scale drawing

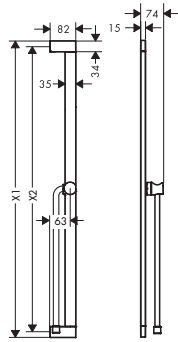


Overview variants

length shower bar (mm)	finish	available from	code no.
950	Chrome	NEW	Q2/2023 24403000
	Brushed Bronze	NEW	Q2/2023 24403140
	Matt Black	NEW	Q2/2023 24403670
	Matt White	NEW	Q2/2023 24403700
663	Chrome	NEW	Q2/2023 24404000
	Brushed Bronze	NEW	Q2/2023 24404140
	Matt Black	NEW	Q2/2023 24404670
	Matt White	NEW	Q2/2023 24404700

Pulsify S Hand showers 1jet

Features of all variants

- shower head size: 98 x 24 mm
- spray type: PowderRain
- with internal water conduction
- rinseable sieve insert
- connection thread G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

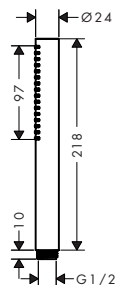

Sustainability



Technologies



Spray types



Overview variants


	spray types	finish		available from	code no.
🌿	PowderRain	🌿 Chrome	NEW	Q3/2023	24126000
		🌿 Brushed Bronze	NEW	Q3/2023	24126140
		🌿 Matt Black	NEW	Q3/2023	24126670
		🌿 Matt White	NEW	Q3/2023	24126700
🌿	PowderRain	🌿 Chrome	NEW	Q3/2023	24125000
		🌿 Brushed Bronze	NEW	Q3/2023	24125140
		🌿 Matt Black	NEW	Q3/2023	24125670
		🌿 Matt White	NEW	Q3/2023	24125700

Pulsify S Shower sets 1jet


Features of all variants

- consists of: baton hand shower, shower bar, shower hose, slider
- shower head size: 98 x 24 mm
- spray type: PowderRain
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- wall mounting: screw fastening
- wall supports made of plastic
- height-adjustable slider with locking push-button slider
- hand shower holder made of plastic/metal

952 mm

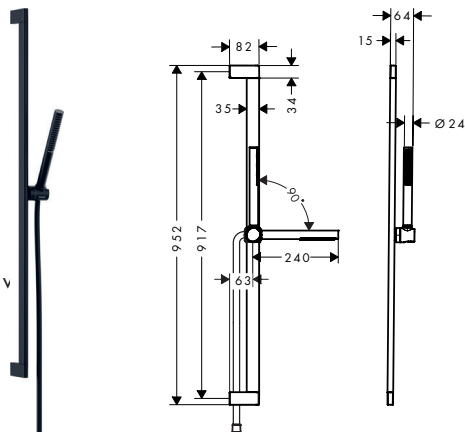

663 mm

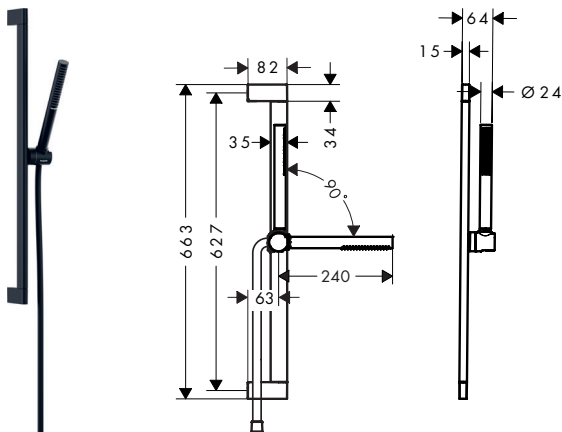

Sustainability



Technologies



Spray types




Overview variants

	length shower bar (mm)	finish		available from	code no.
🌿	952	● Chrome	NEW	Q3/2023	24383000
		● Matt Black	NEW	Q3/2023	24383670
		○ Matt White	NEW	Q3/2023	24383700
🌿	952	● Chrome	NEW	Q3/2023	24382000
		● Matt Black	NEW	Q3/2023	24382670
		○ Matt White	NEW	Q3/2023	24382700
🌿	663	● Chrome	NEW	Q3/2023	24373000
		● Matt Black	NEW	Q3/2023	24373670
		○ Matt White	NEW	Q3/2023	24373700
🌿	663	● Chrome	NEW	Q3/2023	24372000
		● Matt Black	NEW	Q3/2023	24372670
		○ Matt White	NEW	Q3/2023	24372700

Shower arm S 39 cm

Features

- length: 390 mm
- installation type: concealed installation
- material: brass/ plastic
- connection type: G 1/2




finish		available from	code no.
Chrome	NEW	Q3/2023	24357000
Matt White	NEW	Q3/2023	24357700
Matt Black	NEW	Q3/2023	24357670
Brushed Bronze	NEW	Q3/2023	24357140

Unica Shower bars S Puro with easy slide hand shower holders


Features of all variants

- consists of: shower bar, slider, shower hose
- swivelling shower bar
- pivot connector prevents hose from tangling
- hose nut: for shower hoses with a conical nut
- profile pipe: round
- hand shower holder made of plastic/metal, hand shower holder for right- and left-hand installation
- hand shower holder with locking mechanism
- slider steplessly adjustable
- wall supports made of plastic

950 mm 663 mm

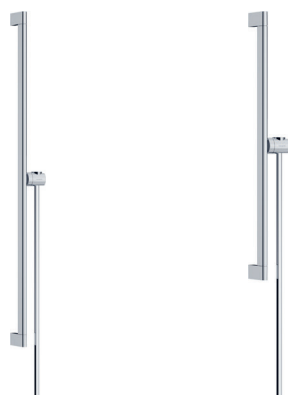

scale drawing

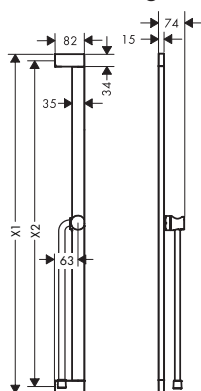


Overview variants

length shower bar (mm)	finish		available from	code no.
950	Chrome	NEW	Q3/2023	24405000
	Matt Black	NEW	Q3/2023	24405670
	Matt White	NEW	Q3/2023	24405700
	Brushed Bronze	NEW	Q3/2023	24405140
663	Chrome	NEW	Q3/2023	24402000
	Brushed Bronze	NEW	Q3/2023	24402140
	Matt Black	NEW	Q3/2023	24402670
	Matt White	NEW	Q3/2023	24402700

Pulsify Select S Hand showers 3jet

Features of all variants

- shower head size: 105 mm
- spray type: PowderRain, IntenseRain, Massage spray
- convenient spray selection via Select button
- spray disc surface: graphite
- with internal water conduction
- rinseable sieve insert
- connection thread G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

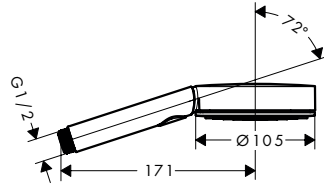

Sustainability



Technologies



Spray types





Overview variants

shower effect	max. flow rate at 3 bar (l/min)	min. flow pressure (bar)	finish	available from	code no.
Relaxation	8.2	1.2	Brushed Bronze	NEW	Q2/2023 24111140
Relaxation	11.4	0.9	Brushed Bronze	NEW	Q2/2023 24110140

Pulsify S Overhead showers 1 jet

Features of all variants

- shower head size: 260 mm
- spray type: PowderRain
- Fast Drain empties the overhead shower from an angle of 10°
- ball-joint: overhead shower angle adjustable
- material spray disc: plastic
- spray disc surface: graphite
- installation: ceiling or wall
- connection thread G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

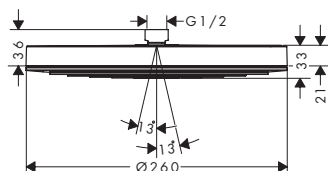

Sustainability



Technologies




Spray types



Overview variants

max. flow rate at 3 bar (l/min)	min. flow pressure (bar)	finish	available from	code no.
8.4	0.8	Brushed Bronze NEW	Q2/2023	24141140
12.3	1	Brushed Bronze NEW	Q2/2023	24140140


Required parts (choose one)

	finish	available from	code no.
 Pulsify Wall connector for overhead shower 260	Brushed Bronze NEW	Q2/2023	24149140
 Shower arm S 39 cm	Brushed Bronze NEW	Q3/2023	24357140
 Ceiling connector S 10 cm	Brushed Bronze		27393140
 Ceiling connector S 30 cm	Brushed Bronze		27389140

Pulsify S Overhead shower 105 1 jet

Features

- shower head size: 105 mm
- spray type: PowderRain
- ball-joint: overhead shower angle adjustable
- material spray disc: plastic
- spray disc surface: graphite
- maximum flow rate at 3 bar: 11,7 l/min
- flow rate PowderRain spray (at 3 bar): 11,7 l/min
- function from: 5,6 l/min
- minimum flow pressure: 0,8 bar
- connection thread G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

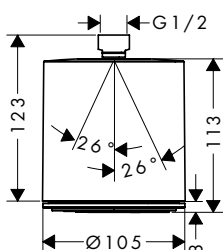

Technologies



Spray types



finish	available from	code no.
Brushed Bronze NEW	Q2/2023	24130140

Optional parts:

	finish	available from	code no.
 Pulsify Wall connector for overhead shower 105	Brushed Bronze NEW	Q2/2023	24139140

Pulsify Wall outlets


Features of all variants

· installation type: exposed installation


· material: plastic

· connection type: G 1/2

for overhead shower 260

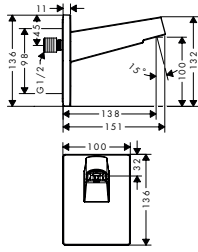

for overhead shower 105

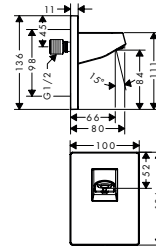



Overview variants

special	finish	available from	code no.
for overhead shower 260	● Brushed Bronze NEW	Q2/2023	24149140
for overhead shower 105	● Brushed Bronze NEW	Q2/2023	24139140

Pulsify S Showerpipes 2jet with thermostat

Features of all variants


- consists of: overhead shower, hand shower, shower thermostat, shower bar, shower hose
- overhead shower Pulsify 260 2jet
- shower head size overhead shower: 260 mm
- spray type overhead shower: PowderRain, Intense PowderRain
- ball-joint: overhead shower inclinable by 13-39°
- spray disc surface: graphite
- Fast Drain empties the overhead shower from an angle of 10°
- removable shower head
- shelf made of plastic
- surface shelf: graphite
- spray type hand shower: PowderRain, IntenseRain, Massage spray
- pipe can be shortened in height
- bar width: 48 mm
- shower arm length overhead shower: 233 mm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat ShowerTablet Select 400
- simultaneous utilization of 3 functions
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection thread G 1/2
- centre distance 150 ± 12 mm
- intrinsically safe against backflow
- Thermostat is delivered with buttons hand shower, PowderRain, Intense PowderRain
- 2 functions

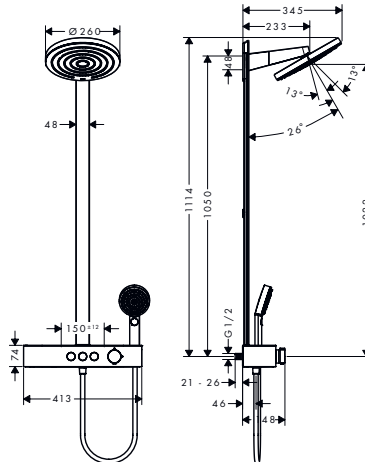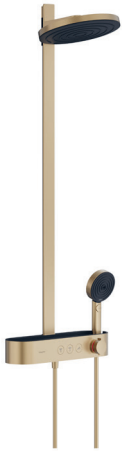

Sustainability



Technologies



Spray types




Overview variants

max. flow rate at 3 bar (l/min)	min. flow pressure (bar)	finish	available from	code no.
7.5	1.7	Brushed Bronze NEW	Q2/2023	24241140
12.9	1.3	Brushed Bronze NEW	Q2/2023	24240140

Pulsify S Showerpipes 1jet with thermostat

Features of all variants


- consists of: overhead shower, hand shower, shower thermostat, shower bar, slider, shower hose
- overhead shower Pulsify 260 1jet
- shower head size overhead shower: 260 mm
- spray type overhead shower: PowderRain
- ball-joint: overhead shower angle adjustable
- spray disc surface: graphite
- Fast Drain empties the overhead shower from an angle of 10°
- removable shower head
- shelf made of plastic
- surface shelf: graphite
- spray type hand shower: PowderRain, IntenseRain, Massage spray
- max. operating pressure: 10 bar
- pipe can be shortened in height
- shower bar diameter: 22 mm
- height-adjustable slider with locking push-button slider
- shower arm length overhead shower: 398 mm
- swivel shower arm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat ShowerTablet Select 400
- safety stop at 40°C
- adjustable hot water limitation
- convenient diversion via Select button
- simultaneous utilization of 2 functions
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection thread G 1/2
- centre distance 150 ± 12 mm
- intrinsically safe against backflow
- Thermostat is delivered with buttons hand shower and overhead shower
- 2 functions

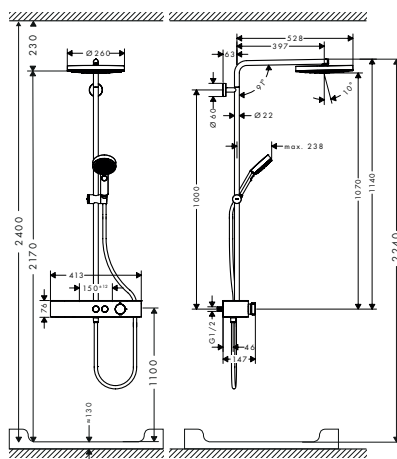

Sustainability



Technologies

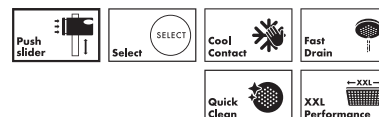

Spray types




Overview variants

max. flow rate at 3 bar (l/min)	min. flow pressure (bar)	finish	available from	code no.	
9	0.9	Brushed Bronze	NEW	Q1/2023	24221140
		Matt Black	NEW	Q1/2023	24221670
		Matt White	NEW	Q1/2023	24221700
10.9	1.2	Brushed Bronze	NEW	Q1/2023	24220140
		Matt Black	NEW	Q1/2023	24220670
		Matt White	NEW	Q1/2023	24220700

ShowerTablet Select Shower thermostat 400 for exposed installation

Features

- 1 function
- temperature and volume control
- hand shower holder integrated in the shelf
- material handles: plastic
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- maximum flow rate at 3 bar: 16,3 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- shelf made of plastic
- surface shelf: graphite
- connection type: G 1/2
- centre distance: 150 ± 12 mm
- dirt filter included
- thermostat is delivered with button hand shower

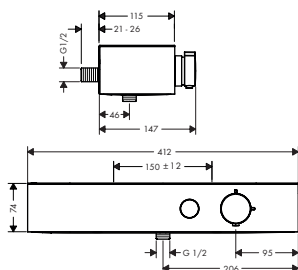

Sustainability



Technologies




finish	available from	code no.
Brushed Bronze NEW	Q2/2023	24360140

ShowerTablet Select Bath thermostat 400 for exposed installation

Features

- rotatable bath spout
- 2 functions
- simultaneous utilization of 2 functions
- temperature and volume control
- Select push-button on/off control for 2 outlets
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- maximum flow rate at 3 bar: 18,7 l/min
- flow rate for bath spout at 3 bar: 18,7 l/min
- flow rate of hand shower at 3 bar: 15,9 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- shelf made of plastic
- surface shelf: graphite
- connection type: G 1/2
- connection dimension: DN 15
- centre distance: 150 ± 12 mm
- dirt filter included
- thermostat is delivered with buttons hand shower and bath tub

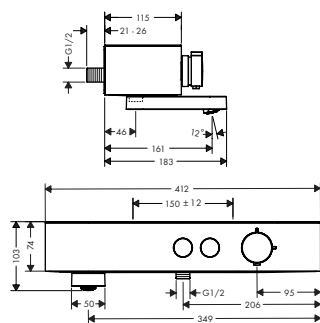

Sustainability



Technologies



finish	available from	code no.
Brushed Bronze NEW	Q2/2023	24340140

Unica Shower bars Pulsify S with Push slider

Features of all variants

- consists of: shower bar, slider, shower hose
- pivot connector prevents hose from tangling
- hand shower holder inclination angle can be adjusted by 45°
- shower bar diameter: 22 mm
- profile pipe: round
- height-adjustable slider with locking push-button slider
- hand shower holder with locking mechanism
- slider steplessly adjustable
- wall supports made of plastic


959 mm



669 mm



scale drawing

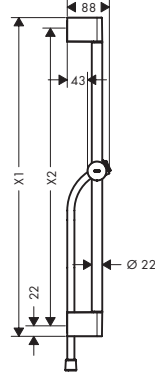

Technologies



Overview variants

length shower bar (mm)	finish	available from	code no.
959	● Matt Black	NEW	Q2/2023 24401670
	○ Matt White	NEW	Q2/2023 24401700
669	● Matt Black	NEW	Q2/2023 24400670
	○ Matt White	NEW	Q2/2023 24400700




Planet Edition

Pulsify Planet Edition Hand shower 105 3jet Relaxation EcoSmart+ Select

Features

- shower head size: 105 mm
- spray type: PowderRain, IntenseRain, Massage spray
- convenient spray selection via Select button
- spray disc surface: graphite
- minimum flow pressure: 1,2 bar
- with internal water conduction
- rinseable sieve insert
- connection thread G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

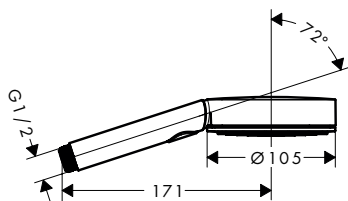

Sustainability



Technologies



Spray types





finish	available from	code no.
Sand (recycled) NEW	Q2/2023	26077210

WallStoris Planet Edition Wall bar 70 cm

Features

- consists of: carrier bar, decorative bar
- wall-mounted
- suitable for horizontal and vertical installation
- horizontal installation suitable for wall bar
- ideal for tiles, glass, metal
- application - glue or drill
- including gluing set
- holding force: 5 kg
- material carrier bar: metal
- material decorative bar: plastic
- length: 700 mm
- concealed fastening
- drilling distance: 312 mm



Installation





finish	available from	code no.
Sand (recycled) NEW	Q2/2023	28911210

WallStoris Planet Edition Storage basket

Features

- material: plastic dyed through
- recess for draining water
- dimensions: 250 x 39 mm
- accessory can be clicked onto the wall bar
- storage for squeegee
- ideal to store shampoo, shower gel, razors
- dishwasher safe, easy to clean

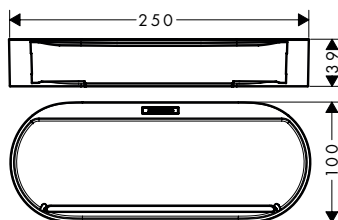

Technologies




finish	available from	code no.
Sand (recycled) NEW	Q2/2023	28912210

WallStoris Planet Edition Shelf

Features

- material shelf: plastic dyed through
- dimensions: 200 x 169 mm
- accessory can be clicked onto the wall bar
- ideal to store razors, mug, candles
- dishwasher safe, easy to clean

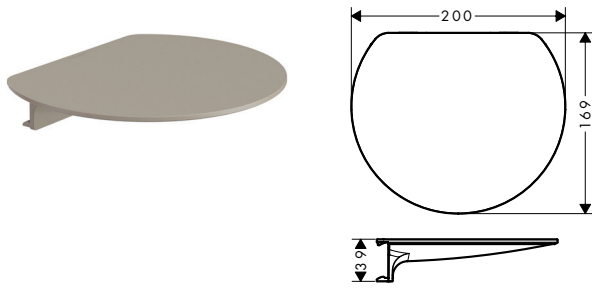

Technologies




finish	available from	code no.
● Sand (recycled)	NEW	Q2/2023
		28917210

WallStoris Planet Edition Squeegee

Features

- material: plastic
- storage option in storage basket
- suitable for glass
- easy to clean
- ergonomic design
- dimensions: 195 x 44 mm

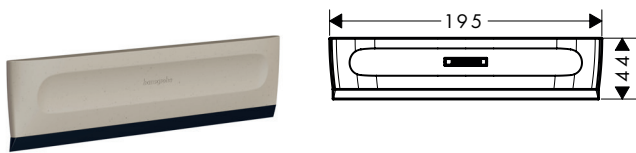


finish	available from	code no.
● Sand (recycled)	NEW	Q2/2023
		28913210

WallStoris Planet Edition Push slider

Features

- material: plastic
- for shower hoses with a conical nut
- height-adjustable slider with locking push-button slider
- slider is rotatable – can be used on vertical and horizontal wall bars

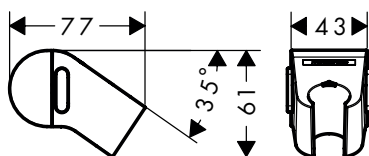

Technologies




finish	available from	code no.
● Sand (recycled)	NEW	Q3/2023 28918210

WallStoris Planet Edition Towel hook wide

Features

- material: plastic dyed through
- accessory can be clicked onto the wall bar
- ideal to hang towels, face cloth, sponges, clothes
- dishwasher safe, easy to clean
- packaging unit: 2 pieces

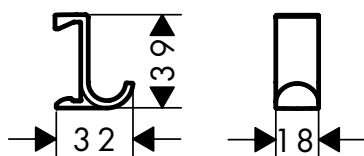

Technologies




finish	available from	code no.
● Sand (recycled)	NEW	Q3/2023 28915210

WallStoris Planet Edition Tumbler

Features

- consists of: tumbler, partition wall
- material: plastic dyed through
- recess for draining water
- accessory can be clicked onto the wall bar
- ideal to store shampoo, razors, tooth paste
- with a partition that can be repositioned or removed
- dishwasher safe, easy to clean

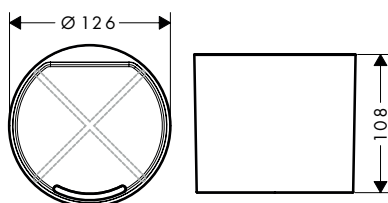

Technologies




finish	available from	code no.
● Sand (recycled)	NEW	Q3/2023 28916210

Designflex Planet Edition Textile shower hoses

Features of all variants

- high-quality textile hose with braiding
- pivot connector prevents hose from tangling
- kink-protected
- water-resistant and water-repellant material
- yarns are made of recycled PET
- unique design with multi-colored braided yarns
- warm, cotton-like material feels great to the skin
- dishwasher proof up to 60 °C
- nuts shower hose: 1 x conical nut, 1 x cylindrical nut
- connection thread: G 1/2

160/125

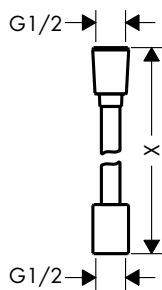

Overview variants

	length (cm)	finish	available from	code no.
	160	● Sand (recycled) NEW	Q3/2023	28250210
	125	● Sand (recycled) NEW	Q3/2023	28221210




Rainfinity

Rainfinity Shower sets 3jet with shower bar S Puro


Features of all variants

- consists of: hand shower, slider, shower hose, shower bar
- shower head size: 130 mm
- spray type: PowderRain, Intense PowderRain, MonoRain
- convenient spray selection via Select button
- with non-return valve
- pivot connector prevents hose from tangling
- wall mounting: screw fastening
- height-adjustable slider with locking push-button slider
- shower bar diameter: 22 mm
- profile pipe: round

959 mm

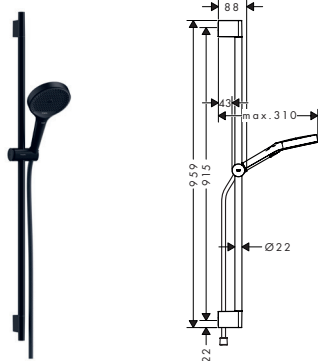

669 mm

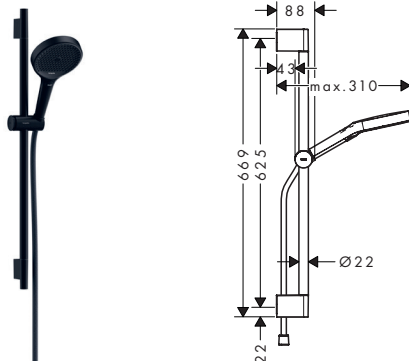

Sustainability



Technologies



Spray types




Overview variants

length shower bar (mm)	finish	available from	code no.
959	Chrome	NEW	Q3/2023 28744000
	Brushed Bronze	NEW	Q3/2023 28744140
	Brushed Black Chrome	NEW	Q3/2023 28744340
	Matt Black	NEW	Q3/2023 28744670
	Matt White	NEW	Q3/2023 28744700
	Polished Gold Optic	NEW	Q3/2023 28744990
959	Chrome	NEW	Q3/2023 28743000
	Brushed Bronze	NEW	Q3/2023 28743140
	Brushed Black Chrome	NEW	Q3/2023 28743340
	Matt Black	NEW	Q3/2023 28743670
	Matt White	NEW	Q3/2023 28743700
	Polished Gold Optic	NEW	Q3/2023 28743990
669	Chrome	NEW	Q3/2023 28746000
	Brushed Bronze	NEW	Q3/2023 28746140
	Brushed Black Chrome	NEW	Q3/2023 28746340
	Matt Black	NEW	Q3/2023 28746670
	Matt White	NEW	Q3/2023 28746700
	Polished Gold Optic	NEW	Q3/2023 28746990
669	Chrome	NEW	Q3/2023 28745000
	Brushed Bronze	NEW	Q3/2023 28745140
	Brushed Black Chrome	NEW	Q3/2023 28745340
	Matt Black	NEW	Q3/2023 28745670
	Matt White	NEW	Q3/2023 28745700
	Polished Gold Optic	NEW	Q3/2023 28745990

Rainfinity Shoulder shower 500 1jet with shower shelf

Features

- shower head size: 502 x 80 mm
- spray type: PowderRain
- spray area: 309 x 28 mm
- field of application: functions as overhead, shoulder or side shower
- maximum flow rate at 3 bar: 14,5 l/min
- flow rate PowderRain spray (at 3 bar): 14,5 l/min
- minimum flow pressure: 1,1 bar
- connection thread: G 1/2
- connection dimension: DN15
- material: metal
- shelf made of safety glass
- surface shelf: graphite

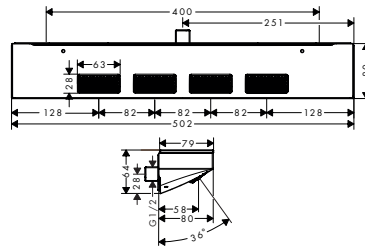





Technologies



Spray types



finish		available from	code no.
 Brushed Bronze	NEW	Q2/2023	26243140
 Brushed Black Chrome	NEW	Q2/2023	26243340
 Matt Black	NEW	Q2/2023	26243670
 Polished Gold Optic	NEW	Q2/2023	26243990



Rainfinity Showerpipes 1jet with thermostat

Features of all variants

- consists of: overhead shower, hand shower, shower thermostat, shower hose, slider, shower bar
- spray type overhead shower: PowderRain
- ball-joint: overhead shower angle adjustable
- 90° position adjustable hand shower holder, pivots left and right, up and down
- spray disc surface: graphite
- spray type hand shower: PowderRain, Intense PowderRain, MonoRain
- bar width: 61 mm
- thermostat ShowerTablet 350
- safety stop at 40°C
- adjustable hot water limitation
- outlets controlled via turning handle
- will not run two outlets at same time
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension DN15
- connection thread G 1/2
- centre distance 150 ± 12 mm
- intrinsically safe against backflow
- 2 functions

360

250

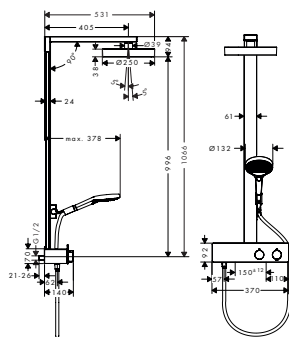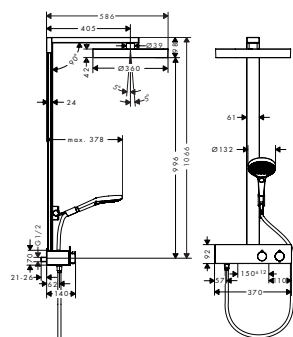

Sustainability

Technologies

Spray types



Overview variants

shower head size	finish	available from	code no.
360	Chrome	NEW	Q2/2023 26853000
	Matt Black	NEW	Q2/2023 26853670
	Matt White	NEW	Q2/2023 26853700
250	Chrome	NEW	Q2/2023 28742000
	Matt Black	NEW	Q2/2023 28742670
	Matt White	NEW	Q2/2023 28742700

Rainfinity Wall outlets with shower holder



Features of all variants

- 500 mm storage shelf
- integrated support function
- metal connection angle
- non-return valve
- connection type: G 1/2
- for shower hoses with a conical nut
- shelf made of safety glass
- surface shelf: graphite

shower holder right



shower holder left

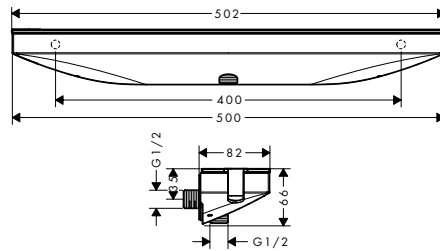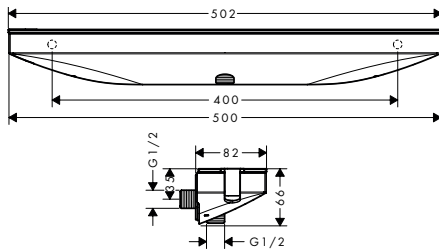


Overview variants

shower holder	finish		available from	code no.
right	Brushed Bronze	NEW	Q2/2023	26858140
	Brushed Black Chrome	NEW	Q2/2023	26858340
	Matt Black	NEW	Q2/2023	26858670
	Polished Gold Optic	NEW	Q2/2023	26858990
left	Brushed Bronze	NEW	Q2/2023	26843140
	Brushed Black Chrome	NEW	Q2/2023	26843340
	Matt Black	NEW	Q2/2023	26843670
	Polished Gold Optic	NEW	Q2/2023	26843990

Rainfinity Shelf 500

Features

- wall-mounted
- material frame: solid brass
- material shelf: safety glass
- surface shelf: graphite
- length: 500 mm
- with mounting material
- concealed fastening
- drilling distance: 400 mm
- diameter drill hole: 6 mm




finish		available from	code no.
Brushed Bronze	NEW	Q2/2023	26844140
Brushed Black Chrome	NEW	Q2/2023	26844340
Matt Black	NEW	Q2/2023	26844670
Polished Gold Optic	NEW	Q2/2023	26844990

RainSelect Thermostat for concealed installation for 3 functions

Features

- 3 functions
- thermostat cartridge, Start/stop valve to operate the functions
- depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- Select push-button on/off control for 3 outlets
- simultaneous use of several outlets
- maximum flow rate at 3 bar: 18,5 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- connection type: basic set
- Thermostat is delivered with buttons handshower, PowderRain, shoulder shower

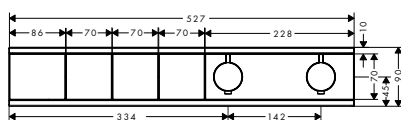

Technologies




finish		available from	code no.
Brushed Bronze	NEW	Q2/2023	15381140
Brushed Black Chrome	NEW	Q2/2023	15381340
Matt Black	NEW	Q2/2023	15381670
Polished Gold Optic	NEW	Q2/2023	15381990

RainSelect Thermostat for concealed installation for 5 functions



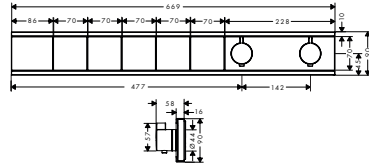

Features

- 5 functions
- thermostat cartridge, Start/stop valve to operate the functions
- depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- Select push-button on/off control for 5 outlets
- simultaneous use of several outlets
- maximum flow rate at 3 bar: 38 l/min
- flow rate by simultaneous use of all outlets: 38 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- connection type: basic set
- Thermostat is delivered with buttons handshower, PowderRain, Waterfall, Rain large, shoulder shower



Technologies



finish		available from	code no.
 Brushed Bronze	NEW	Q2/2023	15384140
 Brushed Black Chrome	NEW	Q2/2023	15384340
 Matt Black	NEW	Q2/2023	15384670
 Polished Gold Optic	NEW	Q2/2023	15384990




Designflex

Designflex Textile shower hoses

Features of all variants

- high-quality textile hose with braiding
- pivot connector prevents hose from tangling
- kink-protected
- water-resistant and water-repellant material
- yarns are made of recycled PET
- unique design with multi-colored braided yarns
- warm, cotton-like material feels great to the skin
- dishwasher proof up to 60°C
- nuts shower hose: 1x conical nut, 1x cylindrical nut
- connection thread: G 1/2

200/160/125

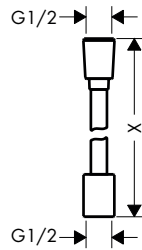

Overview variants

length (cm)	finish	available from	code no.
200	Chrome	NEW	Q3/2023 28230000
	Brushed Bronze	NEW	Q3/2023 28230140
	Brushed Black Chrome	NEW	Q3/2023 28230340
	Matt Black	NEW	Q3/2023 28230670
	Matt White	NEW	Q3/2023 28230700
	Brushed Nickel	NEW	Q3/2023 28230820
	Polished Gold Optic	NEW	Q3/2023 28230990
160	Chrome	NEW	Q3/2023 28260000
	Brushed Bronze	NEW	Q3/2023 28260140
	Brushed Black Chrome	NEW	Q3/2023 28260340
	Matt Black	NEW	Q3/2023 28260670
	Matt White	NEW	Q3/2023 28260700
	Brushed Nickel	NEW	Q3/2023 28260820
	Polished Gold Optic	NEW	Q3/2023 28260990
125	Chrome	NEW	Q3/2023 28220000
	Brushed Bronze	NEW	Q3/2023 28220140
	Brushed Black Chrome	NEW	Q3/2023 28220340
	Matt Black	NEW	Q3/2023 28220670
	Matt White	NEW	Q3/2023 28220700




RainButton

RainButton iBox Control CombiSolution

Features of all variants

- suitable for all Hansgrohe showers
- material: plastic housing
- 1 hot and 1 cold water Rp 1/2 entrance
- 3 mixed water outlets Rp 1/2
- Connection to the solenoid valves
- CAN connection for communication with the iBox Hub
- control of quantity and temperature
- Temperature safety lock at 40°C, max. mixed water temperature limited to 43°
- comfort function for hot water rinsing, possible up to 70°C for a short time
- Bypass for rinsing function
- Shut-off function
- sieve to prevent soiling
- revision shaft necessary, installation in protection area 3
- increased security through IPX4 protected electronics
- vertical installation
- sound-decoupled installation

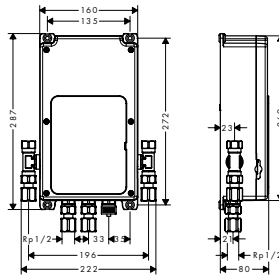

Overview variants





































number of functions		available from	code no.
2 functions	NEW	Q2/2023	15855180
3 functions	NEW	Q2/2023	15857180

Required parts:		finish	available from	code no.
	RainButton iBox Hub			25020180
	RainButton Symbol scenario	<ul style="list-style-type: none"> Chrome Brushed Bronze NEW Brushed Black Chrome NEW Matt Black NEW Matt White Polished Gold Optic NEW 	<ul style="list-style-type: none"> Q2/2023 Q2/2023 Q2/2023 Q2/2023 	<ul style="list-style-type: none"> 25017000 25017140 25017340 25017670 25017700 25017990
	RainButton Symbol temperature	<ul style="list-style-type: none"> Chrome Brushed Bronze NEW Brushed Black Chrome NEW Matt Black NEW Matt White Polished Gold Optic NEW 	<ul style="list-style-type: none"> Q2/2023 Q2/2023 Q2/2023 Q2/2023 	<ul style="list-style-type: none"> 25010000 25010140 25010340 25010670 25010700 25010990
	RainButton Symbol warm up	<ul style="list-style-type: none"> Chrome Brushed Bronze NEW Brushed Black Chrome NEW Matt Black NEW Matt White Polished Gold Optic NEW 	<ul style="list-style-type: none"> Q2/2023 Q2/2023 Q2/2023 Q2/2023 	<ul style="list-style-type: none"> 25018000 25018140 25018340 25018670 25018700 25018990
	RainButton Symbol overhead shower spray 01	<ul style="list-style-type: none"> Chrome Brushed Bronze NEW Brushed Black Chrome NEW Matt Black NEW Matt White Polished Gold Optic NEW 	<ul style="list-style-type: none"> Q2/2023 Q2/2023 Q2/2023 Q2/2023 	<ul style="list-style-type: none"> 25012000 25012140 25012340 25012670 25012700 25012990

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.


RainButton iBox Control CombiSolution

Required parts:		finish	available from	code no.
	RainButton Symbol overhead shower spray 02	 Chrome		25013000
		 Brushed Bronze	NEW	Q2/2023 25013140
		 Brushed Black Chrome	NEW	Q2/2023 25013340
		 Matt Black	NEW	Q2/2023 25013670
		 Matt White		25013700
		 Polished Gold Optic	NEW	Q2/2023 25013990
	RainButton Symbol overhead shower spray 03	 Chrome		25014000
		 Brushed Bronze	NEW	Q2/2023 25014140
		 Brushed Black Chrome	NEW	Q2/2023 25014340
		 Matt Black	NEW	Q2/2023 25014670
		 Matt White		25014700
		 Polished Gold Optic	NEW	Q2/2023 25014990
	RainButton Symbol hand shower	 Chrome		25015000
		 Brushed Bronze	NEW	Q2/2023 25015140
		 Brushed Black Chrome	NEW	Q2/2023 25015340
		 Matt Black	NEW	Q2/2023 25015670
		 Matt White		25015700
		 Polished Gold Optic	NEW	Q2/2023 25015990
	RainButton Symbol shoulder shower	 Chrome		25016000
		 Brushed Bronze	NEW	Q2/2023 25016140
		 Brushed Black Chrome	NEW	Q2/2023 25016340
		 Matt Black	NEW	Q2/2023 25016670
		 Matt White		25016700
		 Polished Gold Optic	NEW	Q2/2023 25016990
	RainButton Symbol volume	 Chrome		25011000
		 Brushed Bronze	NEW	Q2/2023 25011140
		 Brushed Black Chrome	NEW	Q2/2023 25011340
		 Matt Black	NEW	Q2/2023 25011670
		 Matt White		25011700
		 Polished Gold Optic	NEW	Q2/2023 25011990
	RainButton Qi charging pad			25100000

RainButton Symbol scenario

Features

- rotary and push button for for starting, pausing and stopping a scenario and adjusting the volume of the music
- comfortable operation turning and pushing movement
- LED display to show play symbol for showering scenarios, regulating the volume, pausing and ending scenarios
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 2 months during normal operation
- power supply: Battery mode
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined

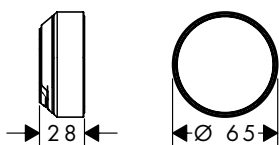

finish		available from	code no.
Chrome			25017000
Brushed Bronze	NEW	Q2/2023	25017140
Brushed Black Chrome	NEW	Q2/2023	25017340
Matt Black	NEW	Q2/2023	25017670
Matt White			25017700
Polished Gold Optic	NEW	Q2/2023	25017990

i 25017000 Surface front screen: mirror glass, housing chrome.

Required parts:

		code no.
	RainButton Qi charging pad	25100000
	RainButton iBox Hub	25020180
	RainButton iBox Control	01600180


Required parts (choose one)

			available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023	15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023	15857180

RainButton Symbol temperature

Features

- rotary and push button for setting the temperature
- comfortable operation turning and pushing movement
- comfort function for hot water rinsing, possible up to 70°C for a short time
- Temperature safety lock at 40°C, max. mixed water temperature limited to 43°C
- LED display for temperature and hot water rinsing
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 2 months during normal operation
- power supply: Battery mode
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined

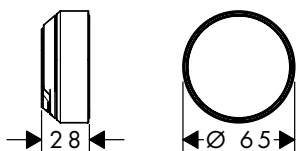

finish		available from	code no.
Chrome			25010000
Brushed Bronze	NEW	Q2/2023	25010140
Brushed Black Chrome	NEW	Q2/2023	25010340
Matt Black	NEW	Q2/2023	25010670
Matt White			25010700
Polished Gold Optic	NEW	Q2/2023	25010990

i 25010000 Surface front screen: mirror glass, housing chrome.

RainButton Symbol temperature


! Required parts:		code no.
	RainButton Qi charging pad	25100000
	RainButton iBox Control	01600180
	RainButton iBox Hub	25020180







! Required parts (choose one)		available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023 15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023 15857180

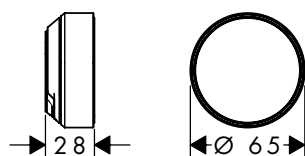


RainButton Symbol warm up

Features

- push button for controlling the warm-up function
- comfort function for rinsing the line up to the preset temperature
- comfortable operation pushing movement
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 3 months during normal operation
- power supply: Battery mode
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined



finish	available from	code no.
 Chrome		25018000
 Brushed Bronze	NEW	Q2/2023 25018140
 Brushed Black Chrome	NEW	Q2/2023 25018340
 Matt Black	NEW	Q2/2023 25018670
 Matt White		25018700
 Polished Gold Optic	NEW	Q2/2023 25018990


! Required parts:		code no.
	RainButton Qi charging pad	25100000
	RainButton iBox Hub	25020180
	RainButton iBox Control	01600180

! Required parts (choose one)		available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023 15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023 15857180

RainButton Symbol overhead shower spray 01

Features

- push button for controlling the overhead shower jet 01
- comfortable operation pushing movement
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 3 months during normal operation
- power supply: Battery mode
- outlets may be operated simultaneously
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined

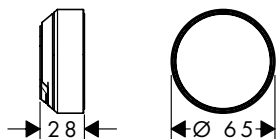

finish		available from	code no.
Chrome			25012000
Brushed Bronze	NEW	Q2/2023	25012140
Brushed Black Chrome	NEW	Q2/2023	25012340
Matt Black	NEW	Q2/2023	25012670
Matt White			25012700
Polished Gold Optic	NEW	Q2/2023	25012990

25012000 Surface front screen: mirror glass, housing chrome.

Required parts:

		code no.
	RainButton Qi charging pad	25100000
	RainButton iBox Hub	25020180
	RainButton iBox Control	01600180


Required parts (choose one)

			available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023	15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023	15857180

RainButton Symbol overhead shower spray 02

Features



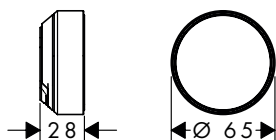


- push button for controlling the overhead shower jet 02
- comfortable operation pushing movement
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 3 months during normal operation
- power supply: Battery mode
- outlets may be operated simultaneously
- degree of protection: IPX7
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined



finish		available from	code no.
Chrome			25013000
Brushed Bronze	NEW	Q2/2023	25013140
Brushed Black Chrome	NEW	Q2/2023	25013340
Matt Black	NEW	Q2/2023	25013670
Matt White			25013700
Polished Gold Optic	NEW	Q2/2023	25013990

25013000 Surface front screen: mirror glass, housing chrome.


RainButton Symbol overhead shower spray 02







! Required parts:			code no.	
	RainButton iBox Control		01600180	
	RainButton Qi charging pad		25100000	
	RainButton iBox Hub		25020180	
! Required parts (choose one)			available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023	15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023	15857180

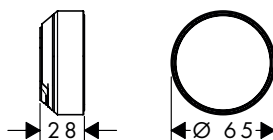RainButton Symbol overhead shower spray 03






Features

- push button for controlling the overhead shower jet 03
- comfortable operation pushing movement
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 3 months during normal operation
- power supply: Battery mode
- outlets may be operated simultaneously
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined



finish	available from	code no.
 Chrome		25014000
 Brushed Bronze	NEW	Q2/2023 25014140
 Brushed Black Chrome	NEW	Q2/2023 25014340
 Matt Black	NEW	Q2/2023 25014670
 Matt White		25014700
 Polished Gold Optic	NEW	Q2/2023 25014990


i 25014000 Surface front screen: mirror glass, housing chrome.

! Required parts:			code no.	
	RainButton iBox Hub		25020180	
	RainButton iBox Control		01600180	
	RainButton Qi charging pad		25100000	
! Required parts (choose one)			available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023	15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023	15857180

RainButton Symbol hand shower

Features

- push button for controlling the hand shower
- comfortable operation pushing movement
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 3 months during normal operation
- power supply: Battery mode
- outlets may be operated simultaneously
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined

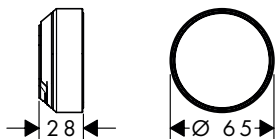

finish		available from	code no.
Chrome			25015000
Brushed Bronze	NEW	Q2/2023	25015140
Brushed Black Chrome	NEW	Q2/2023	25015340
Matt Black	NEW	Q2/2023	25015670
Matt White			25015700
Polished Gold Optic	NEW	Q2/2023	25015990

i 25015000 Surface front screen: mirror glass, housing chrome.

Required parts:

		code no.
	RainButton iBox Hub	25020180
	RainButton Qi charging pad	25100000
	RainButton iBox Control	01600180


Required parts (choose one)

			available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023	15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023	15857180

RainButton Symbol shoulder shower

Features

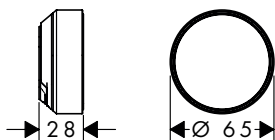


- push button for controlling the shoulder shower
- comfortable operation pushing movement
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 3 months during normal operation
- power supply: Battery mode
- outlets may be operated simultaneously
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined





finish		available from	code no.
Chrome			25016000
Brushed Bronze	NEW	Q2/2023	25016140
Brushed Black Chrome	NEW	Q2/2023	25016340
Matt Black	NEW	Q2/2023	25016670
Matt White			25016700
Polished Gold Optic	NEW	Q2/2023	25016990

i 25016000 Surface front screen: mirror glass, housing chrome.

RainButton Symbol shoulder shower


! Required parts:			code no.
	RainButton iBox Control		01600180
	RainButton iBox Hub		25020180
	RainButton Qi charging pad		25100000







! Required parts (choose one)			available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023	15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023	15857180

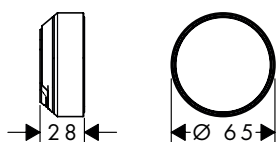RainButton Symbol volume




Features

- rotary and push button for setting the amount of water
- comfortable operation turning and pushing movement
- Cleaning lock for easy cleaning
- LED display for quantity and cleaning mode
- LED status display (battery level, fault, connection)
- Radio standard: BLE
- chargeable via a Qi charging pad
- removable for loading
- Battery life up to 2 months during normal operation
- symbol volume is optional. Function is adjustable via app
- power supply: Battery mode
- degree of protection: IPX7
- temperature limitation not adjustable
- material: metal housing, safety glass
- installation: The symbols can be freely placed via an adhesive or screw connection
- surface front screen: graphite colour, satined



finish		available from	code no.
	Chrome		25011000
	Brushed Bronze	NEW	Q2/2023 25011140
	Brushed Black Chrome	NEW	Q2/2023 25011340
	Matt Black	NEW	Q2/2023 25011670
	Matt White		25011700
	Polished Gold Optic	NEW	Q2/2023 25011990

i 25011000 Surface front screen: mirror glass, housing chrome.

! Required parts:			code no.
	RainButton iBox Hub		25020180
	RainButton Qi charging pad		25100000
	RainButton iBox Control		01600180

! Required parts (choose one)			available from	code no.
	RainButton iBox Control CombiSolution 2 functions	NEW	Q2/2023	15855180
	RainButton iBox Control CombiSolution 3 functions	NEW	Q2/2023	15857180




RainDrain & XtraStoris

RainDrain Original Finish sets shower drains

Features of all variants

- consists of: finish set shower drain, installation set, Dryphon, sealing membrane, grate removal tool
- mounting type: free in the floor
- frameless design
- easy to clean surface
- height adjustable by 10 mm
- tile thickness: up to 18 mm
- up to 49 l/min drainage capacity
- where to use: renovation, new construction
- grate removal tool allows easy removal of the finish set
- type of odour seal: mechanical
- Dryphon enables waterless siphon system
- installation on the screed
- grate material: Stainless Steel 304 (1.4301)

600 - 1200

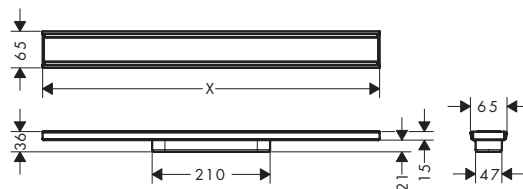

Technologies






Installation



Overview variants





length (mm)	finish	available from	code no.
600	● Brushed Stainless Steel NEW	Q1/2023	56196800
700	● Brushed Stainless Steel NEW	Q1/2023	56197800
800	● Brushed Stainless Steel NEW	Q1/2023	56198800
900	● Brushed Stainless Steel NEW	Q1/2023	56199800
1000	● Brushed Stainless Steel NEW	Q1/2023	56200800
1200	● Brushed Stainless Steel NEW	Q1/2023	56201800

Required parts (choose one)

	code no.
 uBox universal Base set for finish sets for standard installation	01001180
 uBox universal Base set for finish sets for flat installation	01000180
 uBox universal Base set for finish sets for vertical installation	01002180

RainDrain Allround Complete sets shower drains**Features of all variants**

- consists of: finish set shower drain, installation set, pre-assembled sealing membrane, grate removal tool, Siphons
- sealing membrane in 1300 x 1500 mm for complete sealing of the whole wet area
- connection diameter: DN40, DN50
- direction of outlet: horizontal
- easy to clean surface
- height adjustable installation set
- drainage capacity flat installation: up to 50 l/min
- drainage capacity standard installation: up to 48 l/min
- where to use: new construction, renovation
- rotatable and adjustable siphon body
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- with removable hair strainer
- type of odour seal: fluid
- mounting type: free in the floor
- choice of two different siphons
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary drainage

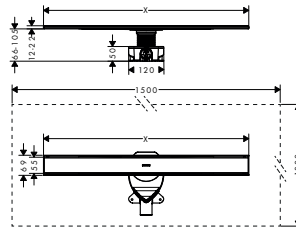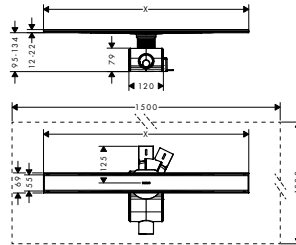700 - 1200**Technologies****Installation****Overview variants**



	length (mm)	finish		available from	code no.
	700	● Brushed Stainless Steel	NEW	Q1/2023	56186800
	800	● Brushed Stainless Steel	NEW	Q1/2023	56187800
	900	● Brushed Stainless Steel	NEW	Q1/2023	56188800
	1000	● Brushed Stainless Steel	NEW	Q1/2023	56189800
	1200	● Brushed Stainless Steel	NEW	Q1/2023	56190800

RainDrain Compact Complete sets shower drains for flat installation

Features of all variants

- consists of: finish set shower drain, installation set, siphon, grate removal tool, pre-assembled sealing membrane
- pre-assembled sealing membrane
- water seal: 30 mm
- connection diameter: DN40
- direction of outlet: horizontal
- easy to clean surface
- up to 27 l/min drainage capacity
- where to use: renovation, new construction
- tile thickness: up to 18 mm
- suitable for every type of tile and tile thickness
- removable water lock
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- type of odour seal: fluid
- minimal installation height 43 mm
- Basic set height: 30 mm
- material siphon: ABS
- mounting type: free in the floor
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary drainage

600 - 1200

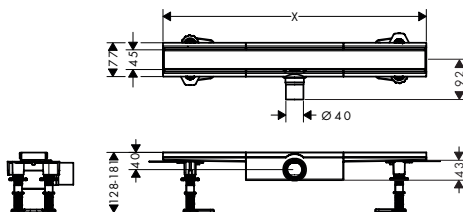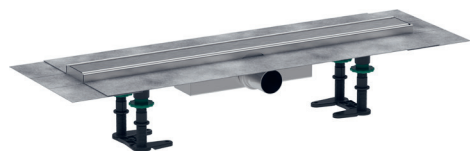

Technologies



Installation




Overview variants

length (mm)	finish	available from	code no.
600	● Brushed Stainless Steel	NEW	Q1/2023 56162800
700	● Brushed Stainless Steel	NEW	Q1/2023 56164800
800	● Brushed Stainless Steel	NEW	Q1/2023 56166800
900	● Brushed Stainless Steel	NEW	Q1/2023 56168800
1000	● Brushed Stainless Steel	NEW	Q1/2023 56170800
1200	● Brushed Stainless Steel	NEW	Q1/2023 56172800

RainDrain Compact Complete sets shower drains tileable for flat installation**Features of all variants**

- consists of: tileable grate, installation set, siphon, grate removal tool, pre-assembled sealing membrane
- pre-assembled sealing membrane
- water seal: 30 mm
- connection diameter: DN40
- direction of outlet: horizontal
- easy to clean surface
- height adjustable installation set, height adjustable grate
- up to 27 l/min drainage capacity
- where to use: renovation, new construction
- tile thickness: up to 18 mm
- suitable for every type of tile and tile thickness
- removable water lock
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- type of odour seal: fluid
- minimal installation height 43 mm
- material siphon: ABS
- mounting type: free in the floor
- tile inlay depth: 12 mm
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary drainage

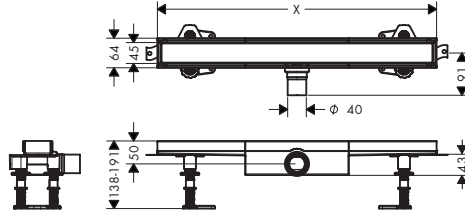600 - 1200**Technologies****Installation****Overview variants**



	length (mm)		available from	code no.
	600	NEW	Q1/2023	56163000
	700	NEW	Q1/2023	56165000
	800	NEW	Q1/2023	56167000
	900	NEW	Q1/2023	56169000
	1000	NEW	Q1/2023	56171000
	1200	NEW	Q1/2023	56173000

RainDrain Compact Complete sets shower drain for standard installation

Features of all variants

- consists of: finish set shower drain, installation set, siphon, grate removal tool, pre-assembled sealing membrane
- pre-assembled sealing membrane
- water seal: 30 mm, 50 mm
- connection diameter: DN50
- direction of outlet: horizontal
- easy to clean surface
- height adjustable installation set, height adjustable grate
- where to use: renovation, new construction
- tile thickness: up to 18 mm
- suitable for every type of tile and tile thickness
- removable water lock
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- type of odour seal: fluid
- Basic set height: 50 mm
- material siphon: ABS
- mounting type: free in the floor
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary drainage

600 - 1200

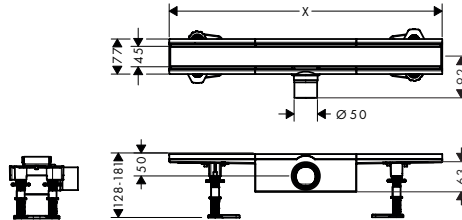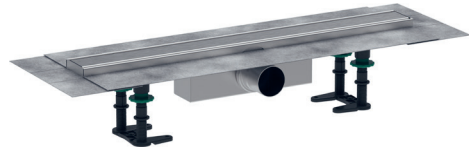

Technologies



Installation



Overview variants


length (mm)	finish	available from	code no.
600	● Brushed Stainless Steel	NEW	Q1/2023 56174800
700	● Brushed Stainless Steel	NEW	Q1/2023 56176800
800	● Brushed Stainless Steel	NEW	Q1/2023 56178800
900	● Brushed Stainless Steel	NEW	Q1/2023 56180800
1000	● Brushed Stainless Steel	NEW	Q1/2023 56182800
1200	● Brushed Stainless Steel	NEW	Q1/2023 56184800

RainDrain Compact Complete sets shower drains tileable for standard installation

Features of all variants

- consists of: tileable grate, installation set, siphon, grate removal tool, pre-assembled sealing membrane
- pre-assembled sealing membrane
- connection diameter: DN50
- direction of outlet: horizontal
- easy to clean surface
- height adjustable installation set, height adjustable grate
- up to 37 l/min drainage capacity
- where to use: renovation, new construction
- tile thickness: up to 18 mm
- suitable for every type of tile and tile thickness
- removable water lock
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- type of odour seal: fluid
- Basic set height: 50 mm
- material siphon: ABS
- mounting type: free in the floor
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary drainage

600 - 1200

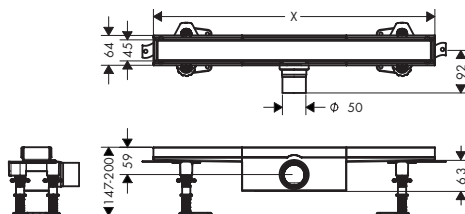

Technologies



Installation



Overview variants


length (mm)		available from	code no.
600	NEW	Q1/2023	56175000
700	NEW	Q1/2023	56177000
800	NEW	Q1/2023	56179000
900	NEW	Q1/2023	56181000
1000	NEW	Q1/2023	56183000
1200	NEW	Q1/2023	56185000

RainDrain Brilliance Complete sets point drain


Features of all variants

- consists of: point drain, installation set, base set, pre-assembled sealing membrane, grate removal tool, siphon, screed protection cover
- pre-assembled sealing membrane
- tileable on the back side
- water seal: up to max. 50 mm
- connection diameter: DN50
- direction of outlet: horizontal
- easy to clean surface
- easy adjustment to tile thickness with height adjustable frame (7 - 18 mm)
- where to use: new construction, renovation
- removable water lock
- rotatable and adjustable siphon body
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- type of odour seal: fluid
- minimal installation height 79 mm
- Basic set height: 59 mm
- material siphon: ABS
- mounting type: free in the floor
- simplified installation due to the cutable siphon
- tile inlay depth: 12 mm
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary and secondary drainage

100/100

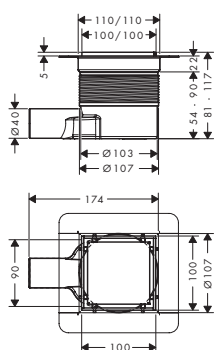


150/150

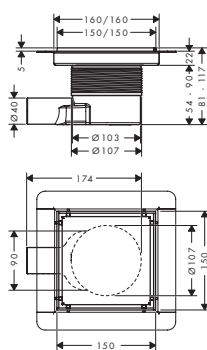

Technologies



Installation



Overview variants

product dimensions (mm)	finish		available from	code no.
100/100	● Brushed Stainless Steel	NEW	Q1/2023	56250800
	● Matt Black	NEW	Q1/2023	56250670

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

RainDrain Brilliance Complete sets point drain

Overview variants


product dimensions (mm)	finish	available from	code no.
150/150	Brushed Stainless Steel	NEW	Q1/2023 56251800
	Matt Black	NEW	Q1/2023 56251670

RainDrain Point Complete sets point drain


Features of all variants

- consists of: point drain, installation set, pre-assembled sealing membrane, base set, siphon, screed protection cover
- pre-assembled sealing membrane
- water seal: up to max. 50 mm
- connection diameter: DN40
- direction of outlet: pre-assembled horizontally, can be used vertically
- easy to clean surface
- height adjustable by 10 mm
- where to use: new construction, renovation
- tile thickness: up to 18 mm
- removable water lock
- rotatable and adjustable siphon body
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- type of odour seal: fluid
- minimal installation height 54 mm
- Basic set height: 54 mm
- material siphon: ABS
- mounting type: free in the floor
- simplified installation due to the cutable siphon
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary drainage

100/100

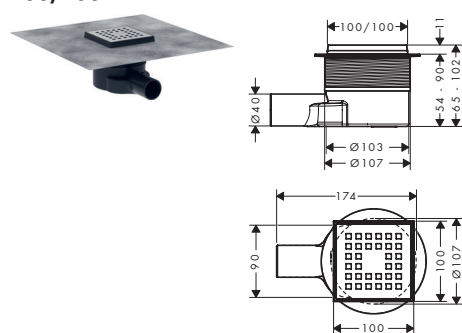

150/150

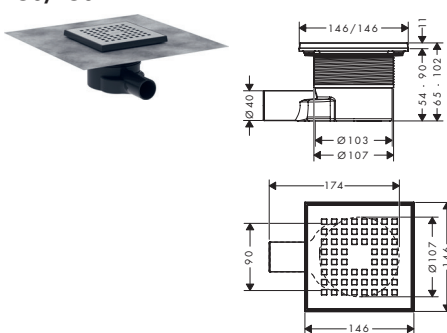

Technologies



Installation



Overview variants


product dimensions (mm)	finish	available from	code no.
100/100	Brushed Stainless Steel	NEW	Q1/2023 56246800
150/150	Brushed Stainless Steel	NEW	Q1/2023 56248800

RainDrain Point Complete sets point drain


Features of all variants

- consists of: point drain, installation set, pre-assembled sealing membrane, base set, siphon, screed protection cover
- pre-assembled sealing membrane
- tileable on the back side
- connection diameter: DN40
- direction of outlet: pre-assembled horizontally, can be used vertically
- easy to clean surface
- height adjustable by 10 mm
- where to use: new construction, renovation
- tile thickness: up to 18 mm
- removable water lock
- rotatable and adjustable siphon body
- easy to clean siphon
- grate removal tool allows easy removal of the finish set
- type of odour seal: fluid
- material siphon: ABS
- mounting type: free in the floor
- simplified installation due to the cutable siphon
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary drainage

100/100

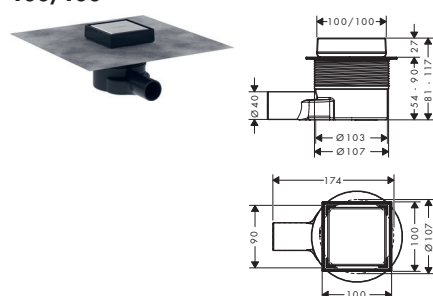

150/150

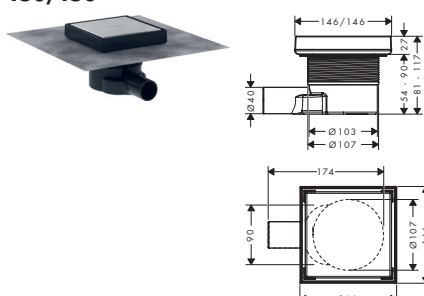





Technologies



Installation



RainDrain Point Complete sets point drain**Overview variants**


product dimensions (mm)	finish		available from	code no.
100/100	 Brushed Stainless Steel	NEW	Q1/2023	56247800
	 Matt Black	NEW	Q1/2023	56247670
150/150	 Brushed Stainless Steel	NEW	Q1/2023	56249800
	 Matt Black	NEW	Q1/2023	56249670

XtraStoris Original Wall niches with frame


Features of all variants

- consists of: wall niche with frame, sealing set, installation set
- where to use: new construction, renovation
- easy to clean surface
- suitable for use in wet areas
- wall type: solid wall construction, drywall construction
- material sealing set: Polystyrene (PS)
- material wall niche: Stainless Steel 304 (1.4301)
- required dimensions for sealing set: 323 x 313 x 75 mm (HxWxD)

300/150/70

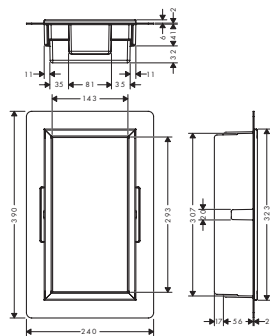

300/300/70

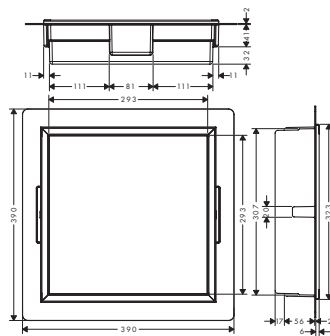

Installation




Overview variants

	width (mm)	finish		available from	code no.
	150	● Concretegrey	NEW	Q1/2023	56092380
		● Matt Black	NEW	Q1/2023	56092670
		○ Matt White	NEW	Q1/2023	56092700
	300	● Concretegrey	NEW	Q1/2023	56093380
		● Matt Black	NEW	Q1/2023	56093670
		○ Matt White	NEW	Q1/2023	56093700

XtraStoris Original Recessed toilet paper holder 150/150 /140

Features

- installation depth: 140 mm
- where to use: new construction, renovation
- easy to clean surface
- frameless design
- wall type: drywall construction, solid wall construction
- material wall niche: Stainless Steel 304 (1.4301)
- with tear-off edge
- dimensions wall niche: 150 x 150 x 140 (HxWxD)
- required dimensions for sealing set: 150 x 198 x 144mm (HxWxD)

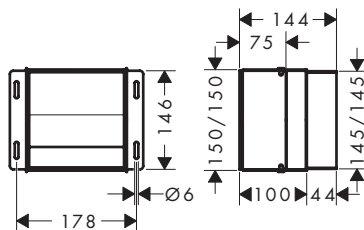


finish		available from	code no.
● Brushed Stainless Steel	NEW	Q1/2023	56065800
● Matt Black	NEW	Q1/2023	56065670
○ Matt White	NEW	Q1/2023	56065700

XtraStoris Rock Recessed toilet brush holder with toilet paper holder and tileable door

Features

- consists of: wall niche with tileable door, toilet brush holder, toilet paper roll holder, installation set, sealing set
- tileable Push-Open door
- depth of the tileable door: 12 mm
- installation depth: 140 mm
- where to use: new construction, renovation
- easy to clean surface
- easy adjustment to tile thickness
- frameless design
- wall type: drywall construction, solid wall construction
- material sealing set: Polystyrene (PS)
- material wall niche: Stainless Steel 304 (1.4301)
- material of the brush holder plastic, chromed
- dimensions wall niche: 595 x 145 x 140 (HxWxD)
- required dimensions for sealing set: 606 x 176 x 140 mm (HxWxD)

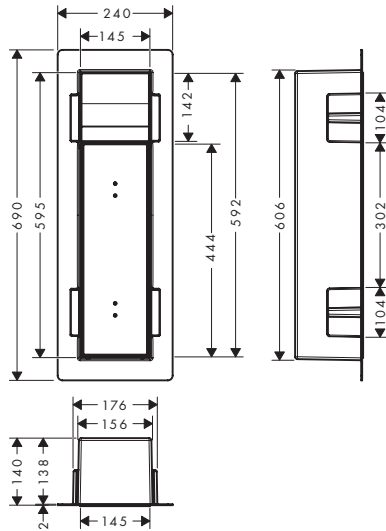

Installation



finish		available from	code no.
● Brushed Stainless Steel	NEW	Q1/2023	56062800
● Matt Black	NEW	Q1/2023	56062670
○ Matt White	NEW	Q1/2023	56062700




Aqittura M91


Aqittura M91 SodaSystem 210, pull-out spout, 1 jet, sBox

Features

- consists of: single lever kitchen mixer, hose box, filterhead, mineralisation cartridge Harmony with filter, SodaBase
- not included: CO2 bottle
- ComfortZone 210
- swivel range adjustable in 3 steps 60°, 110° or 150°
- laminar spray
- maximum flow rate at 3 bar: 6,2 l/min
- ceramic cartridge
- connection type: G 3/8 connections
- integrated non-return valve
- suitable for continuous flow water heaters
- sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop
- extension length up to 76 cm
- tap hole with Ø 35 mm required
- separate water supply for filtered and unfiltered water
- cooled, filtered drinking water in still, medium and sparkling via selection button on the spout
- control and monitoring of consumption data via hansgrohe home App
- filter capacity: 300 l
- cooling capacity: 7 l/h cooled water
- push notification for low filter or CO2 capacity (hansgrohe home App)
- power consumption: 170 W (cooling phase), 1,6 W (standby)
- power supply: 230V ±10 %
- maximum withdrawal quantity (cooled/sparkling water): 2 l/min

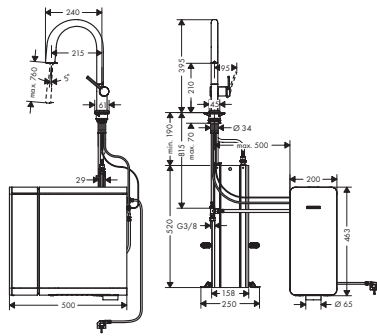

Technologies



Spray types




finish	code no.
Chrome	76836000
Matt Black	76836670
Stainless Steel Finish	76836800

Optional parts:	code no.
Filter active carbon	76814000
Filter ion exchanger and active carbon	76815000
Filter ion exchanger Pro and active carbon	76827000
Mineralisation and filter Harmony	76828000
Mineralisation and filter Life	76829000
Mineralisation and filter Sport	76830000

Aqittura M91 SodaSystem 240, 1jet

Features

- consists of: single lever kitchen mixer, filterhead, mineralisation cartridge Harmony with filter, SodaBase
- not included: CO2 bottle
- ComfortZone 240
- l-spout
- swivel range adjustable in 2 steps 60° or 110°
- laminar spray
- device connection DN20
- maximum flow rate at 3 bar: 6,5 l/min
- ceramic cartridge
- connection type: G 3/8 connections
- integrated non-return valve
- suitable for continuous flow water heaters
- tap hole with Ø 35 mm required
- separate water supply for filtered and unfiltered water
- cooled, filtered drinking water in still, medium and sparkling via selection button on the spout
- control and monitoring of consumption data via hansgrohe home App
- filter capacity: 300 l
- cooling capacity: 7 l/h cooled water
- push notification for low filter or CO2 capacity (hansgrohe home App)
- power consumption: 170 W (cooling phase), 1,6 W (standby)
- power supply: 230V ±10 %
- maximum withdrawal quantity (cooled/sparkling water): 2 l/min

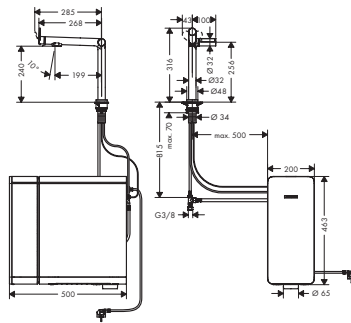







Technologies



Spray types





finish	code no.
● Chrome	76837000
● Matt Black	76837670
● Stainless Steel Finish	76837800

Optional parts:	code no.
 Filter active carbon	76814000
 Filter ion exchanger and active carbon	76815000
 Filter ion exchanger Pro and active carbon	76827000
 Mineralisation and filter Harmony	76828000
 Mineralisation and filter Life	76829000
 Mineralisation and filter Sport	76830000

Aqittura M91 FilterSystems with pull-out spout

Features of all variants

- ComfortZone 210
- swivel range adjustable in 3 steps 60°, 110° or 150°
- laminar spray
- maximum flow rate at 3 bar: 6,5 l/min
- ceramic cartridge
- connection type: G 3/8 connections
- integrated non-return valve
- suitable for continuous flow water heaters
- tap hole with Ø 35 mm required
- separate water supply for filtered and unfiltered water
- filtered still drinking water via push button at the spout
- filter connection: G 3/8 input and output
- maximum withdrawal quantity (filtered water): 1,8 l/min

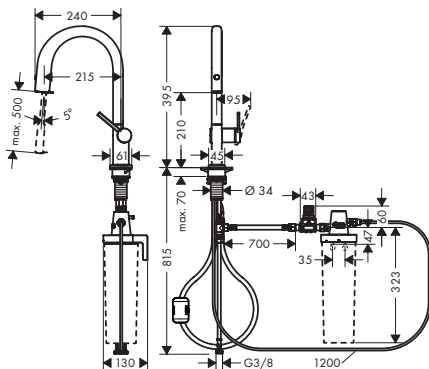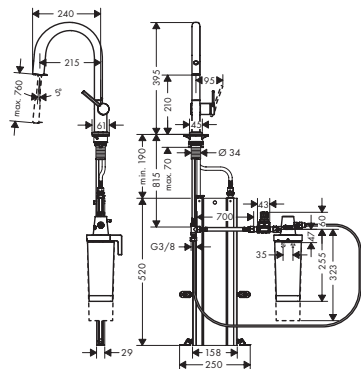

Technologies



Spray types




Overview variants

ComfortZone	hose retraction	extension length (cm)	set	finish	code no.
210	sBox	up to 76 cm	with filter Harmony	Chrome	76800000
				Matt Black	76800670
				Stainless Steel Finish	76800800
210	weight	up to 50 cm	with filter Harmony	Chrome	76801000
				Matt Black	76801670
				Stainless Steel Finish	76801800
210	sBox	up to 76 cm	without filter	Chrome	76826000
				Matt Black	76826670
				Stainless Steel Finish	76826800
210	weight	up to 50 cm	without filter	Chrome	76803000
				Matt Black	76803670
				Stainless Steel Finish	76803800

Optional parts:

	code no.
Filter active carbon	76814000
Filter ion exchanger and active carbon	76815000
Filter ion exchanger Pro and active carbon	76827000
Mineralisation and filter Harmony	76828000


Aqittura M91 FilterSystems with pull-out spout

Optional parts:		code no.
	Mineralisation and filter Life	76829000
	Mineralisation and filter Sport	76830000
	F23 Flowmeter	76818000

Aqittura M91 FilterSysteme with swivel spout

Features of all variants

- ComfortZone 240
- l-spout
- swivel range adjustable in 2 steps 60° or 110°
- laminar spray
- ceramic cartridge
- connection type: G 3/8 connections
- integrated non-return valve
- suitable for continuous flow water heaters
- tap hole with Ø 35 mm required
- separate water supply for filtered and unfiltered water
- filtered still drinking water via Select button
- filter connection: G 3/8 input and output
- maximum withdrawal quantity (filtered water): 1,8 l/min

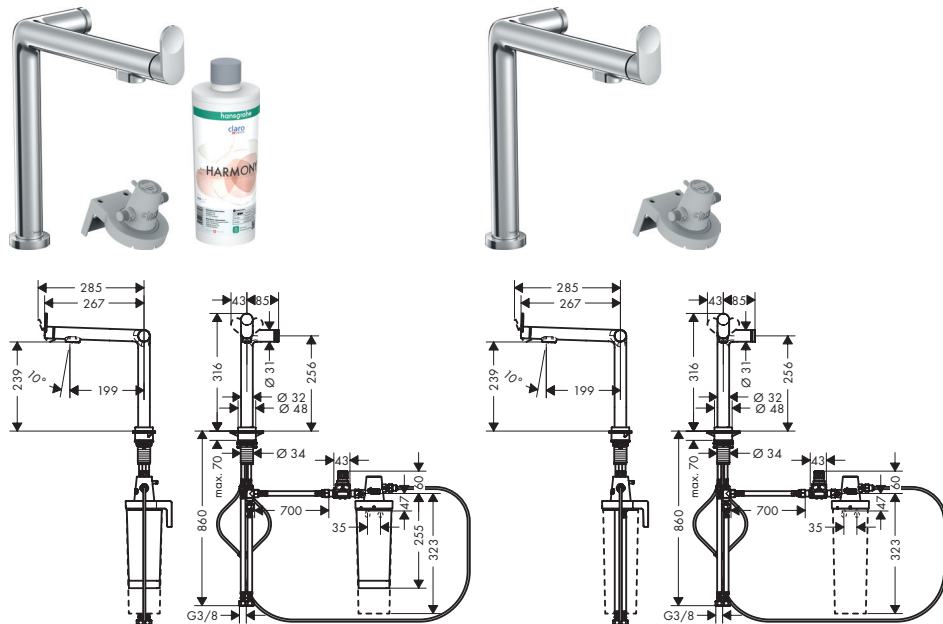

Technologies

Spray types



Overview variants

ComfortZone	set	finish	code no.
240	with filter Harmony	<ul style="list-style-type: none"> ● Chrome ● Matt Black ● Stainless Steel Finish 	<ul style="list-style-type: none"> 76802000 76802670 76802800
240	without filter	<ul style="list-style-type: none"> ● Chrome ● Matt Black ● Stainless Steel Finish 	<ul style="list-style-type: none"> 76804000 76804670 76804800

Optional parts:

		code no.
	Filter active carbon	76814000
	Filter ion exchanger and active carbon	76815000
	Filter ion exchanger Pro and active carbon	76827000
	Mineralisation and filter Harmony	76828000
	Mineralisation and filter Life	76829000
	Mineralisation and filter Sport	76830000
	F23 Flowmeter	76818000




Zesis M33

Zesis M33 Single lever kitchen mixer with metal pull-out spray



Features of all variants

- swivel range 150°
- laminar spray, shower spray
- lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing
- quick connect hose
- connection dimension: DN15
- maximum flow rate at 3 bar: 8,2 l/min
- ceramic cartridge
- connection type: G 3/8 connections
- temperature limitation adjustable
- integrated non-return valve
- suitable for continuous flow water heaters
- metal pull-out spray


150

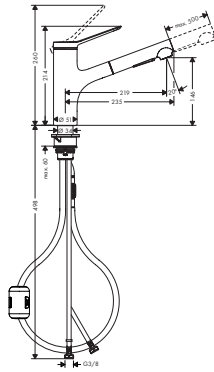

160

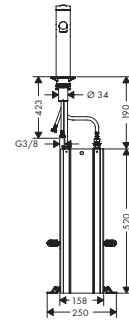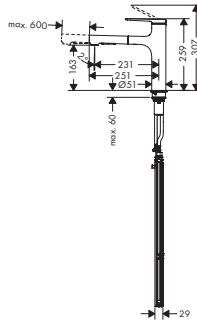

Technologies



Spray types







Overview variants

ComfortZone	hose retraction	extension length (cm)	finish	available from	code no.	
150	sBox	up to 76 cm	● Chrome NEW Q2/2023 74821000	NEW	Q2/2023	74821000
			● Matt Black NEW Q2/2023 74821670			
			● Stainless Steel Finish NEW Q2/2023 74821800			
150	weight	up to 50 cm	● Chrome NEW Q2/2023 74820000	NEW	Q2/2023	74820000
			● Matt Black NEW Q2/2023 74820670			
			● Stainless Steel Finish NEW Q2/2023 74820800			
160	sBox	up to 60 cm	● Chrome NEW Q2/2023 74823000	NEW	Q2/2023	74823000
			● Matt Black NEW Q2/2023 74823670			
			● Stainless Steel Finish NEW Q2/2023 74823800			
160	weight	up to 50 cm	● Chrome NEW Q2/2023 74822000	NEW	Q2/2023	74822000
			● Matt Black NEW Q2/2023 74822670			
			● Stainless Steel Finish NEW Q2/2023 74822800			

Zesis M33 Single lever kitchen mixer 150, LowPressure/vented hot water cylinders, 1 jet**Features**

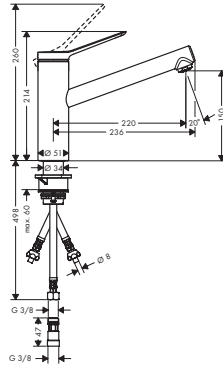- for vented hot water cylinders (no pressure)
- ComfortZone 150
- swivel range adjustable in 3 steps 60°, 110° or 360°
- normal spray
- connection dimension: DN15
- maximum flow rate at 3 bar: 4 l/min
- ceramic cartridge
- connection type: G 3/8 connections
- temperature limitation adjustable
- not suitable for continuous flow water heaters

**Technologies****Spray types**

finish		available from	code no.
 Chrome	NEW	Q1/2023	74806000
 Matt Black	NEW	Q1/2023	74806670
 Stainless Steel Finish	NEW	Q1/2023	74806800

Hansgrohe SE · P.O. Box 1145 · 77757 Schiltach/Germany
Tel. +49 7836 51-0 · Fax +49 7836 51-1300 · info@hansgrohe.com · www.hansgrohe.com



Find hansgrohe online and on social media.
Find out more about the hansgrohe world at pro.hansgrohe-int.com



hansgrohe Product news catalogue 2023 Bathroom & kitchen range, prices and selling points EX en-EN ·
Subject to change in the interest of technical advancement · Form No. 84090489 · 03/23/2.89 · Printed in Germany

